

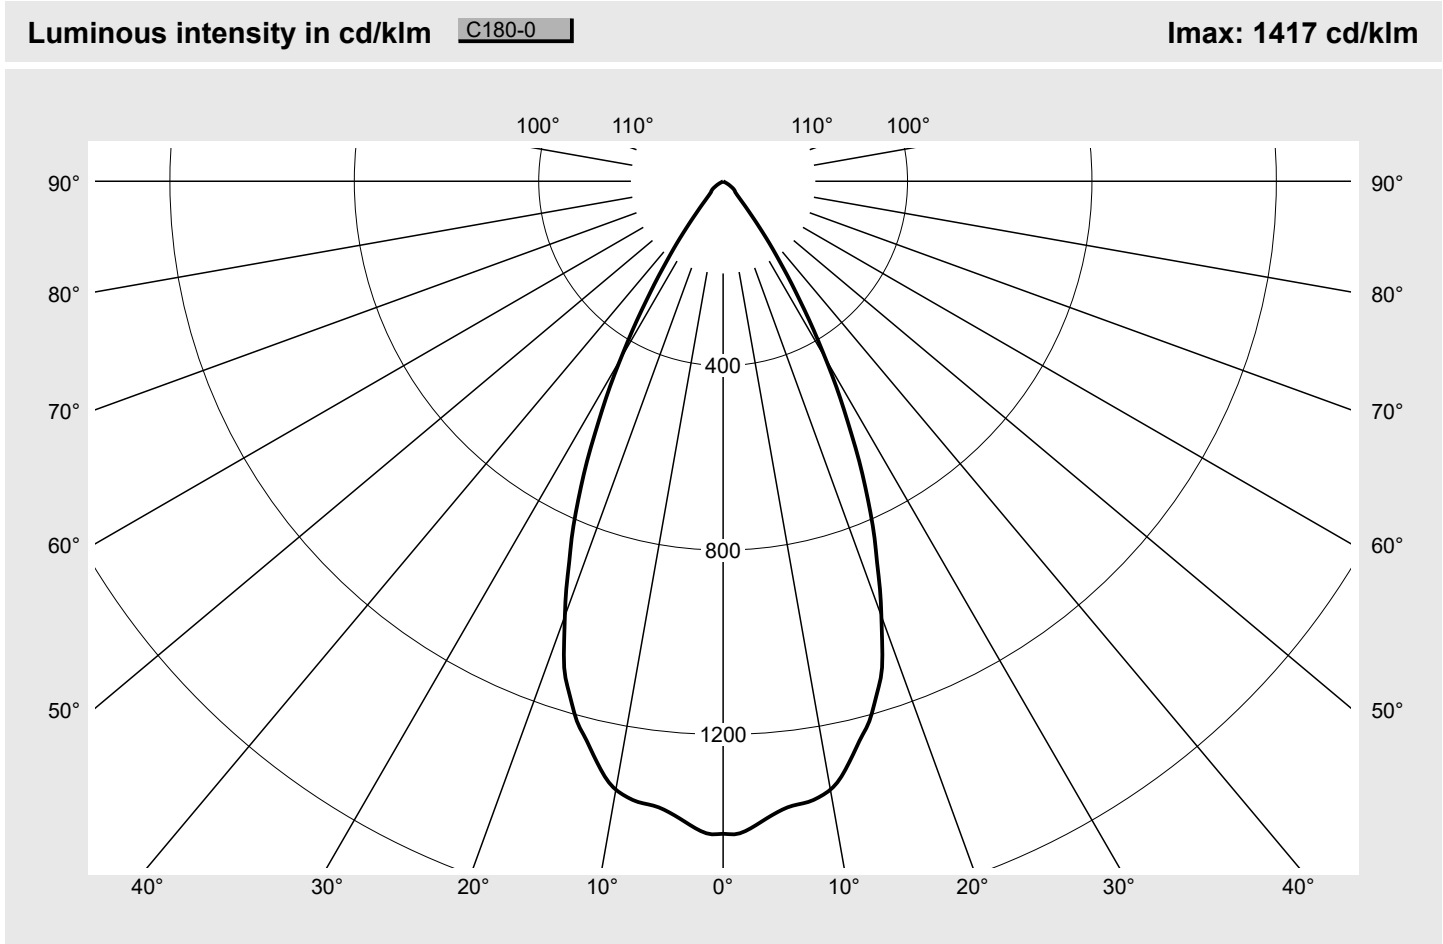


# Photometric test report

<b>Family</b> <b>Lunis 21</b>	<b>Order number: 51DB15MA91C</b> <b>EAN: 4069025013408</b>	<b>LP number</b> <b>59573_45</b>
	<b>Version</b>	recessed luminaire, Combined lens and reflector optics, reflector, highly specular, rotationally symmetrical medium distribution, adjustable color temperature: 3000K   4000K   6500K, UGR≤19 (L65≤3000cd/m²)
	<b>Lamps</b>	LED 4000 K   CRI ≥ 80
	<b>Controlgear</b>	ECG
	<b>Setting</b>	factory setting: colour temperature 4000K
	<b>Rated values</b>	Net luminous flux = 990 lm Power consumption = 5.9 W Luminous efficacy = 167.8 lm/W
		<b>serial documentation</b> 11.04.2024
		



Classifications	
DIN 5040	A 7 0
CIE	N1=95 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Lunis 21</b>	Order number: <b>51DB15MA91C</b> EAN: <b>4069025013408</b>	LP number <b>59573_45</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1415.3	0.3	0.3
1°	1416.8	2.7	3.1
2°	1409.9	5.4	8.4
3°	1397.4	8.0	16.5
4°	1384.1	10.6	27.1
5°	1372.7	13.1	40.2
6°	1364.4	15.6	55.8
7°	1361.0	18.2	74.0
8°	1358.1	20.7	94.7
9°	1350.7	23.2	117.9
10°	1340.1	25.5	143.4
11°	1322.2	27.7	171.1
12°	1296.4	29.6	200.6
13°	1268.5	31.3	231.9
14°	1241.6	32.9	264.9
15°	1217.8	34.6	299.4
16°	1184.9	35.8	335.3
17°	1150.7	36.9	372.1
18°	1114.5	37.8	409.9
19°	1059.7	37.8	447.7
20°	1003.6	37.6	485.4
21°	949.8	37.3	522.7
22°	891.3	36.6	559.3
23°	840.7	36.0	595.4
24°	785.1	35.0	630.4
25°	728.0	33.7	664.1
26°	670.9	32.3	696.4
27°	609.9	30.4	726.7
28°	554.4	28.5	755.3
29°	500.5	26.6	781.9
30°	444.1	24.4	806.2
31°	393.2	22.2	828.4
32°	344.6	20.0	848.5
33°	297.9	17.8	866.2
34°	258.6	15.9	882.1
35°	219.9	13.8	895.9
36°	188.6	12.2	908.1
37°	159.9	10.6	918.7
38°	133.0	9.0	927.6
39°	111.0	7.7	935.3
40°	92.3	6.5	941.8
41°	78.5	5.6	947.4
42°	67.1	4.9	952.4
43°	57.6	4.3	956.7
44°	50.8	3.9	960.5
45°	45.3	3.5	964.1
46°	41.3	3.3	967.3

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	38.2	3.1	970.4
48°	35.6	2.9	973.3
49°	34.3	2.8	976.1
50°	33.5	2.8	978.9
51°	32.0	2.7	981.7
52°	30.5	2.6	984.3
53°	28.9	2.5	986.8
54°	26.7	2.4	989.2
55°	24.2	2.2	991.4
56°	20.9	1.9	993.3
57°	18.3	1.7	994.9
58°	16.1	1.5	996.4
59°	13.5	1.3	997.7
60°	9.6	0.9	998.6
61°	6.6	0.6	999.2
62°	4.1	0.4	999.7
63°	2.1	0.2	999.9
64°	0.7	0.1	999.9
65°	0.3	0.0	1000.0
66°	0.3	0.0	1000.0
67°	0.0	0.0	1000.0
68°	0.0	0.0	1000.0
69°	0.1	0.0	1000.0
70°	0.0	0.0	1000.0
71°	0.0	0.0	1000.0
72°	0.0	0.0	1000.0
73°	0.0	0.0	1000.0
74°	0.0	0.0	1000.0
75°	0.0	0.0	1000.0
76°	0.0	0.0	1000.0
77°	0.0	0.0	1000.0
78°	0.0	0.0	1000.0
79°	0.0	0.0	1000.0
80°	0.0	0.0	1000.0
81°	0.0	0.0	1000.0
82°	0.0	0.0	1000.0
83°	0.0	0.0	1000.0
84°	0.0	0.0	1000.0
85°	0.0	0.0	1000.0
86°	0.0	0.0	1000.0
87°	0.0	0.0	1000.0
88°	0.0	0.0	1000.0
89°	0.0	0.0	1000.0
90°	0.0	0.0	1000.0
91°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

## Photometric test report

Family <b>Lunis 21</b>	Order number: <b>51DB15MA91C</b> EAN: <b>4069025013408</b>	LP number <b>59573_45</b>
---------------------------	---	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.3	20.4	19.7	20.7	21.1	19.3	20.4	19.7	20.7	21.1
	3H	19.2	20.1	19.5	20.5	20.8	19.2	20.1	19.5	20.5	20.8
	4H	19.1	20.0	19.5	20.3	20.7	19.1	20.0	19.5	20.3	20.7
	6H	19.0	19.8	19.4	20.2	20.6	19.0	19.8	19.4	20.2	20.6
	8H	19.1	19.7	19.5	20.1	20.5	19.1	19.7	19.5	20.1	20.5
	12H	19.1	19.6	19.5	20.0	20.4	19.1	19.6	19.5	20.0	20.4
4H	2H	19.1	20.0	19.5	20.4	20.8	19.1	20.0	19.5	20.4	20.8
	3H	18.9	19.7	19.4	20.1	20.5	18.9	19.7	19.4	20.1	20.5
	4H	18.8	19.5	19.3	19.9	20.3	18.8	19.5	19.3	19.9	20.3
	6H	18.7	19.3	19.2	19.7	20.2	18.7	19.3	19.2	19.7	20.2
	8H	18.7	19.2	19.2	19.6	20.1	18.7	19.2	19.2	19.6	20.1
	12H	18.7	19.1	19.2	19.5	20.0	18.7	19.1	19.2	19.5	20.0
8H	4H	18.7	19.2	19.2	19.6	20.1	18.7	19.2	19.2	19.6	20.1
	6H	18.6	19.0	19.1	19.4	20.0	18.6	19.0	19.1	19.4	20.0
	8H	18.5	18.9	19.0	19.3	19.9	18.5	18.9	19.0	19.3	19.9
	12H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8
12H	4H	18.7	19.1	19.2	19.5	20.0	18.7	19.1	19.2	19.5	20.0
	6H	18.6	18.9	19.1	19.3	19.9	18.6	18.9	19.1	19.3	19.9
	8H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8

<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 57
------------------------	---------------------------------	--------------------------------------

C-planes		0°
$\gamma$	Luminance in cd/m <sup>2</sup>	
45°	24828.9	
50°	20226.3	
55°	16335.1	
60°	7441.2	
65°	295.6	
70°	0.0	
75°	0.0	
80°	0.0	
85°	0.0	

**Photometric test report**

<b>Family</b> Lunis 21	<b>Order number: 51DB15MA91C</b> <b>EAN: 4069025013408</b>	<b>LP number</b> 59573_45
---------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

