




# Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TL1DMN46XG</b> <b>EAN: 4058352056837</b>	<b>LP number</b> <b>59520_273</b>
	<b>Version</b> cover, opal, direct-/ indirect distribution, diffuse <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG Multilumen <b>Rated values</b> Net luminous flux = 6270 lm Power consumption = 35.0 W Luminous efficacy = 179.1 lm/W	<b>serial documentation</b> <b>13.06.2024</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 294 cd/klm**

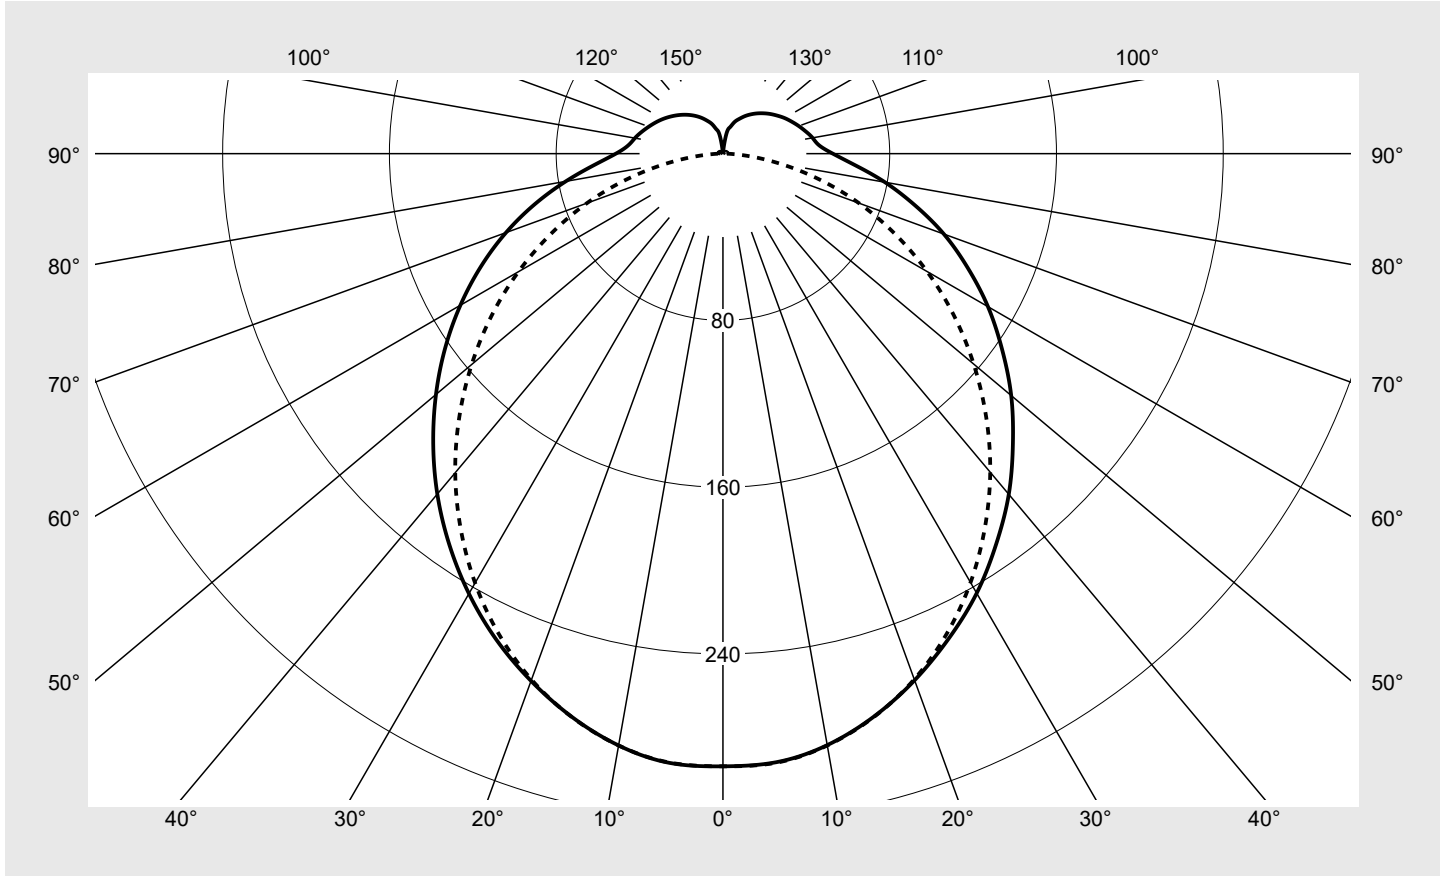

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	87.4%
$\phi_o$	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TL1DMN46XG</b> <b>EAN: 4058352056837</b>	<b>LP number</b> <b>59520_273</b>
--	--	--------------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
$\gamma$	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TL1DMN46XG</b> <b>EAN: 4058352056837</b>	<b>LP number</b> <b>59520_273</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 21 Opal	<b>Order number: 52TL1DMN46XG</b> <b>EAN: 4058352056837</b>	<b>LP number</b> 59520_273
-----------------------------------	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------


Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.1	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.8	23.3	23.8
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3
	6H	23.6	24.8	24.2	25.4	26.0	22.2	23.5	22.8	24.0	24.6
	8H	24.0	25.2	24.6	25.7	26.4	22.4	23.6	22.9	24.1	24.7
	12H	24.4	25.4	24.9	26.0	26.6	22.4	23.5	23.0	24.1	24.7
4H	2H	20.8	22.1	21.3	22.7	23.2	20.5	21.8	21.0	22.3	22.9
	3H	22.9	24.0	23.4	24.5	25.2	22.2	23.3	22.7	23.9	24.5
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.5
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7
	12H	25.7	26.4	26.3	27.0	27.8	23.6	24.4	24.2	25.0	25.7
8H	4H	24.2	25.0	24.8	25.6	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.3	26.0	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0
	8H	25.9	26.5	26.6	27.2	27.9	24.2	24.8	24.9	25.5	26.2
	12H	26.5	27.0	27.1	27.7	28.4	24.4	24.9	25.0	25.6	26.3
12H	4H	24.2	24.9	24.8	25.5	26.3	23.3	24.0	24.0	24.7	25.4
	6H	25.4	26.0	26.0	26.6	27.4	24.1	24.7	24.8	25.3	26.1
	8H	26.0	26.5	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1500</b>	<b>H(C0) = 25</b>	<b>H(C180) = 25</b>							
			<b>B = 76</b>	<b>H(C90) = 25</b>	<b>H(C270) = 25</b>							
<b>C-planes</b>	<b>0°</b>	<b>30°</b>	<b>60°</b>	<b>90°</b>	<b>120°</b>	<b>150°</b>	<b>180°</b>	<b>210°</b>	<b>240°</b>	<b>270°</b>	<b>300°</b>	<b>330°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>											
45°	11513.9	11500.7	11931.6	13662.0	11979.7	11510.5	11504.4	11495.9	11942.2	13686.8	11985.0	11525.1
50°	11096.1	11055.8	11388.6	13173.8	11405.8	11025.0	11046.3	11030.1	11382.8	13201.0	11422.9	11050.7
55°	10661.7	10623.6	10823.0	12665.3	10829.2	10552.4	10614.2	10574.3	10810.6	12688.1	10860.1	10607.2
60°	10287.8	10196.0	10253.7	12092.7	10240.1	10089.5	10191.3	10119.1	10212.9	12110.0	10287.7	10160.4
65°	9886.3	9768.9	9685.7	11432.7	9647.6	9626.4	9775.0	9671.7	9617.1	11442.8	9708.6	9730.0
70°	9526.6	9294.2	9049.8	10677.0	8988.7	9106.6	9355.6	9157.1	8945.0	10677.0	9067.3	9222.1
75°	9081.6	8755.6	8262.4	9600.9	8166.5	8558.3	8903.9	8591.2	8121.0	9586.3	8280.0	8714.6
80°	8722.7	8259.0	7389.3	8091.3	7207.1	8056.6	8462.9	8047.0	7199.5	8060.7	7330.7	8220.4
85°	8439.8	7926.7	6503.4	5973.9	6342.2	7627.1	8202.4	7695.2	6290.2	5905.6	6486.7	7807.9

**Photometric test report**

<b>Family</b> <b>Licross® 21 Opal</b>	<b>Order number: 52TL1DMN46XG</b> <b>EAN: 4058352056837</b>	<b>LP number</b> <b>59520_273</b>
--	--	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**      γ 65°    γ 70°    γ 75°    γ 80°    γ 85°      **siteco**

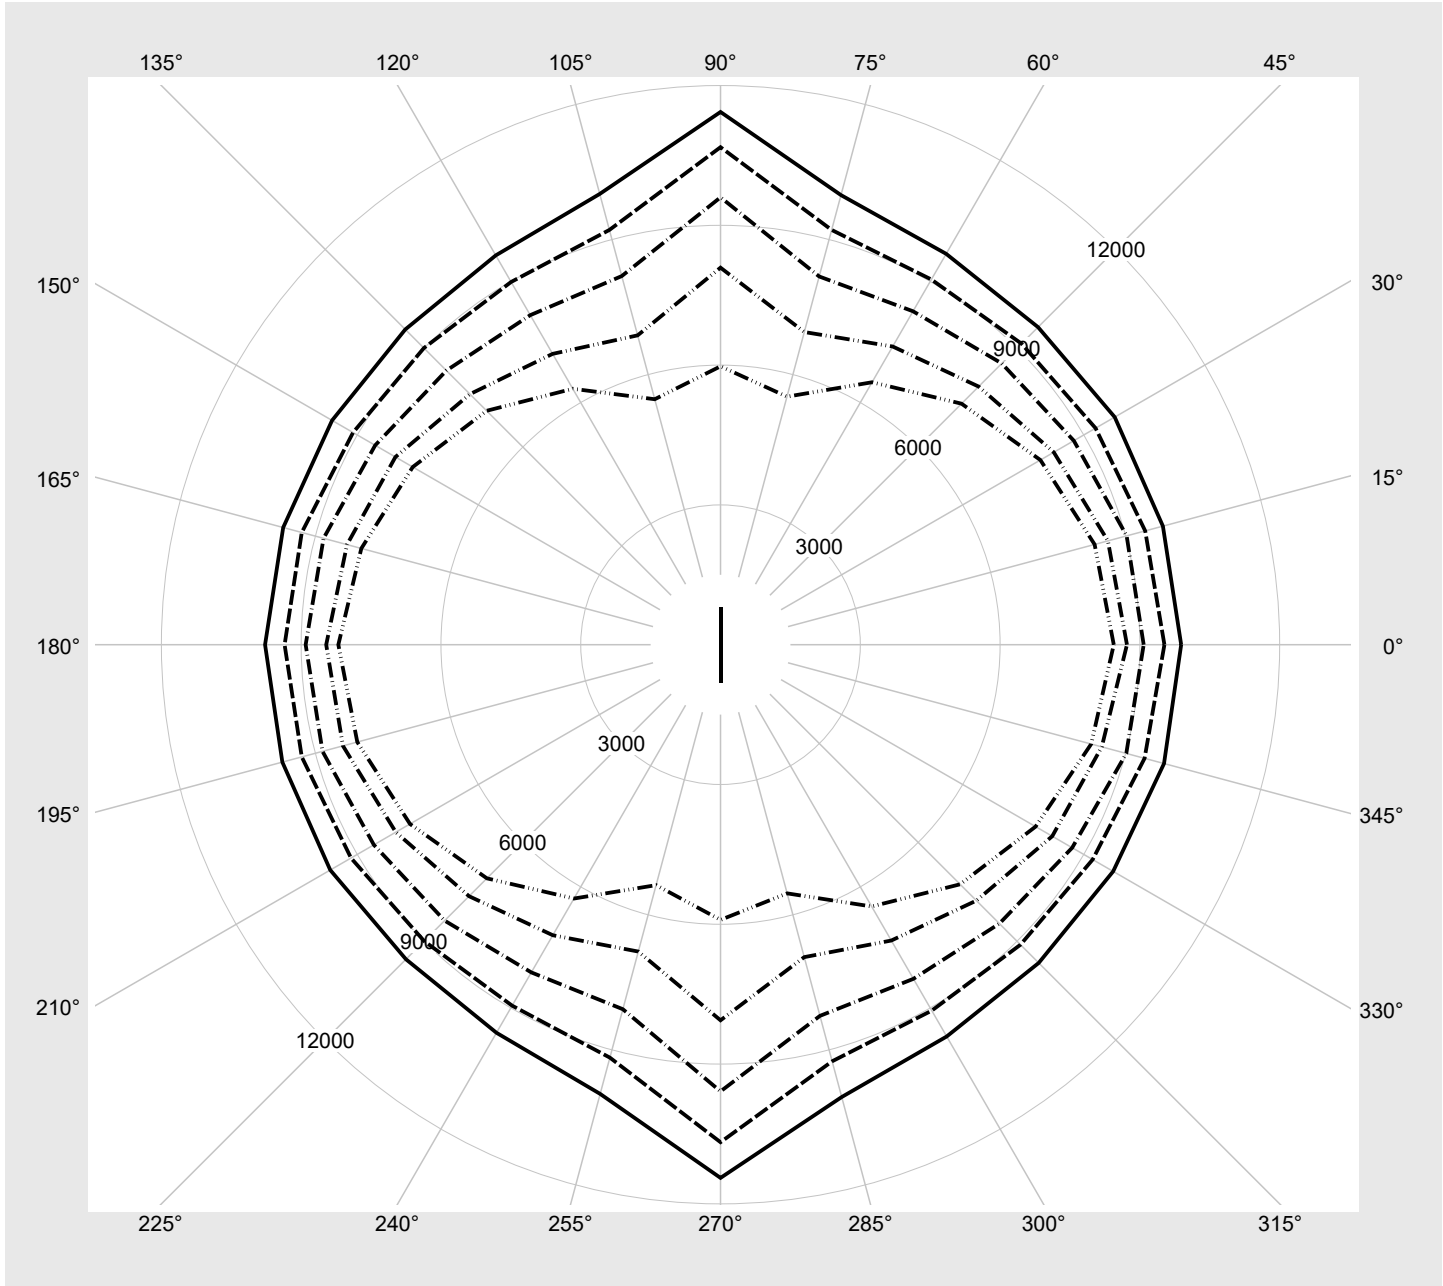

### Photometric test report

Family <b>Licross® 21 Opal</b>	Order number: <b>52TL1DMN46XG</b> EAN: <b>4058352056837</b>	LP number <b>59520_273</b>
-----------------------------------	--	-------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	6270	35.0
2	A	C	F	5966	33.3
3	A	D	E	5599	31.2
4	A	D	F	5305	29.5
5	B	C	E	4928	27.4
6	B	C	F	4624	25.7
7	B	D	E	4246	23.6
8	B	D	F	3942	22.0