

Photometric test report

Family
Spot 11

Order number: 51SD14EAD5A
EAN: 4058352767740

LP number
59368_5



Version reflector, cover panel, PC, clear, wide distribution
Lamps LED 4000 K | CRI ≥ 90
Controlgear ECG-DALI
Setting factory setting: DIP-Step=10
Rated values Net luminous flux = 5670 lm
Power consumption = 38.4 W
Luminous efficacy = 147.7 lm/W


serial
documentation
23.12.2022

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 1788 cd/klm

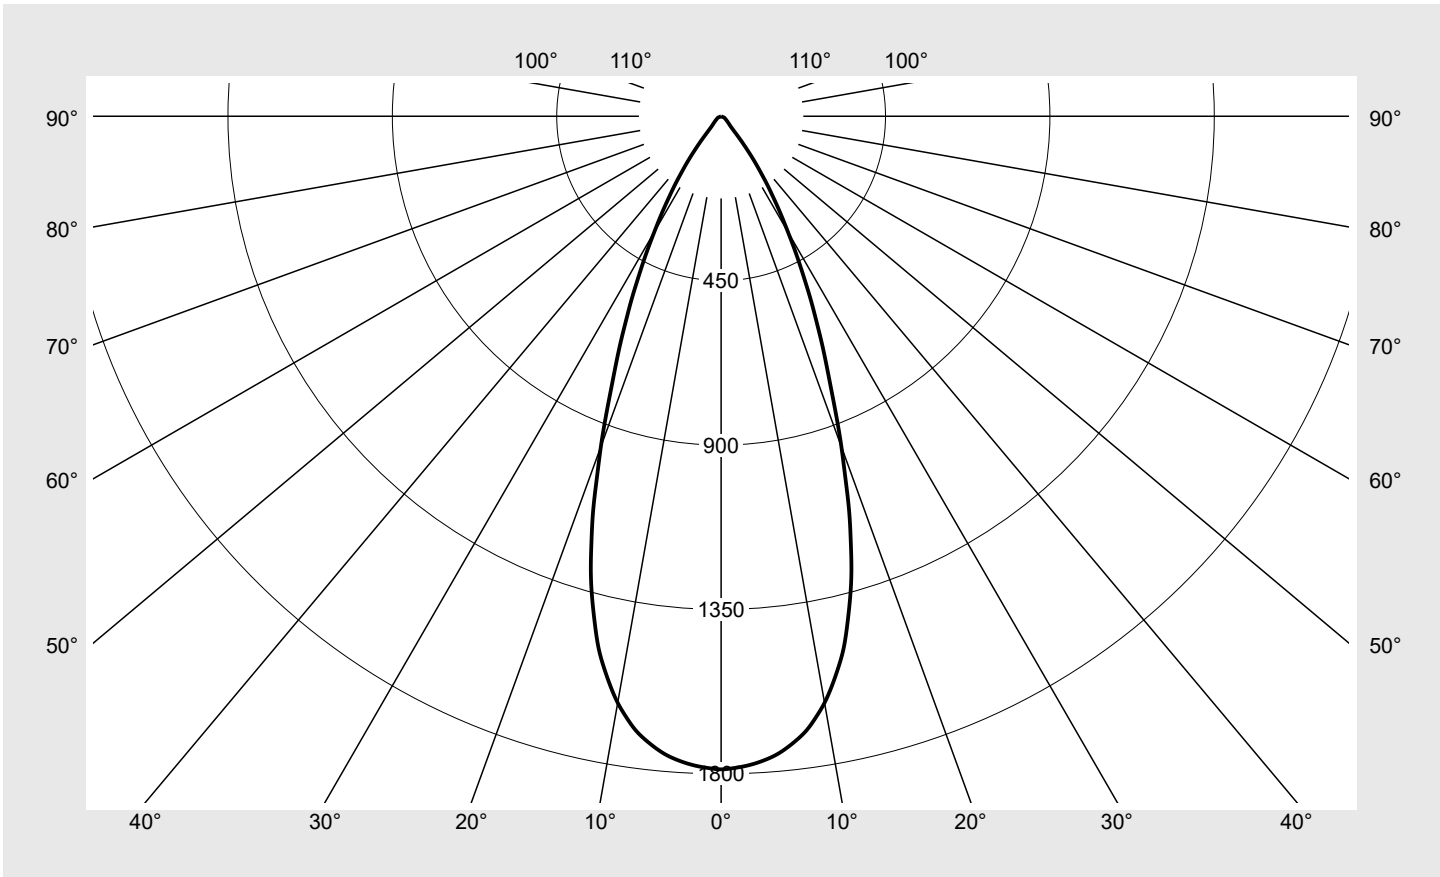

Classifications

DIN 5040 A 7 0
CIE N1=95 N2=98 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 11	Order number: 51SD14EAD5A EAN: 4058352767740	LP number 59368_5
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1787.8	0.4	0.4
1°	1785.0	3.4	3.8
2°	1780.6	6.8	10.7
3°	1774.1	10.2	20.8
4°	1765.1	13.5	34.3
5°	1753.5	16.8	51.1
6°	1737.2	19.9	71.0
7°	1718.0	23.0	94.0
8°	1695.0	25.9	119.8
9°	1664.4	28.6	148.4
10°	1630.4	31.0	179.4
11°	1588.8	33.2	212.7
12°	1543.0	35.2	247.9
13°	1492.7	36.8	284.7
14°	1429.8	37.9	322.6
15°	1364.5	38.7	361.3
16°	1294.1	39.1	400.5
17°	1213.5	38.9	439.4
18°	1133.2	38.4	477.8
19°	1043.5	37.3	515.0
20°	962.6	36.1	551.1
21°	880.9	34.6	585.7
22°	803.1	33.0	618.7
23°	736.5	31.6	650.3
24°	675.3	30.1	680.4
25°	614.8	28.5	708.9
26°	561.0	27.0	735.9
27°	506.2	25.2	761.1
28°	457.2	23.5	784.6
29°	410.6	21.8	806.4
30°	366.1	20.1	826.5
31°	327.4	18.5	845.0
32°	290.6	16.9	861.9
33°	255.7	15.3	877.2
34°	225.3	13.8	891.0
35°	193.5	12.2	903.2
36°	166.5	10.7	913.9
37°	139.9	9.2	923.1
38°	114.0	7.7	930.8
39°	91.9	6.3	937.2
40°	71.2	5.0	942.2
41°	55.8	4.0	946.2
42°	45.5	3.3	949.5
43°	39.2	2.9	952.5
44°	34.9	2.7	955.1
45°	32.1	2.5	957.6
46°	29.6	2.3	960.0

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	27.8	2.2	962.2
48°	25.7	2.1	964.3
49°	24.0	2.0	966.3
50°	22.5	1.9	968.2
51°	21.0	1.8	969.9
52°	19.7	1.7	971.7
53°	18.6	1.6	973.3
54°	17.4	1.5	974.8
55°	16.5	1.5	976.3
56°	15.5	1.4	977.7
57°	14.7	1.4	979.1
58°	14.0	1.3	980.4
59°	13.3	1.2	981.6
60°	12.7	1.2	982.8
61°	12.0	1.2	984.0
62°	11.5	1.1	985.1
63°	10.9	1.1	986.2
64°	10.4	1.0	987.2
65°	9.9	1.0	988.2
66°	9.4	0.9	989.1
67°	9.0	0.9	990.0
68°	8.5	0.9	990.9
69°	8.1	0.8	991.7
70°	7.7	0.8	992.5
71°	7.3	0.8	993.3
72°	6.8	0.7	994.0
73°	6.5	0.7	994.7
74°	6.1	0.6	995.3
75°	5.7	0.6	995.9
76°	5.4	0.6	996.5
77°	5.0	0.5	997.0
78°	4.7	0.5	997.5
79°	4.4	0.5	998.0
80°	4.0	0.4	998.4
81°	3.5	0.4	998.8
82°	3.1	0.3	999.1
83°	2.5	0.3	999.4
84°	2.0	0.2	999.6
85°	1.5	0.2	999.8
86°	1.0	0.1	999.9
87°	0.6	0.1	1000.0
88°	0.2	0.0	1000.0
89°	0.1	0.0	1000.0
90°	0.1	0.0	1000.0

Photometric test report

Family Spot 11	Order number: 51SD14EAD5A EAN: 4058352767740	LP number 59368_5
-------------------	---	----------------------

UGR-Table	Standard room	sitEco
-----------	---------------	--------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.9	23.0	22.2	23.3	23.6	21.9	23.0	22.2	23.3	23.6
	3H	22.1	23.1	22.5	23.4	23.8	22.1	23.1	22.5	23.4	23.8
	4H	22.3	23.1	22.7	23.5	23.9	22.3	23.1	22.7	23.5	23.9
	6H	22.4	23.2	22.9	23.6	24.0	22.4	23.2	22.9	23.6	24.0
	8H	22.6	23.2	23.1	23.6	24.0	22.6	23.2	23.1	23.6	24.0
	12H	22.6	23.2	23.1	23.6	24.0	22.6	23.2	23.1	23.6	24.0
4H	2H	21.8	22.7	22.2	23.1	23.4	21.8	22.7	22.2	23.1	23.4
	3H	22.2	22.9	22.6	23.3	23.7	22.2	22.9	22.6	23.3	23.7
	4H	22.4	23.1	22.9	23.5	23.9	22.4	23.1	22.9	23.5	23.9
	6H	22.7	23.2	23.2	23.7	24.2	22.7	23.2	23.2	23.7	24.2
	8H	22.8	23.3	23.3	23.8	24.2	22.8	23.3	23.3	23.8	24.2
	12H	22.9	23.3	23.4	23.8	24.3	22.9	23.3	23.4	23.8	24.3
8H	4H	22.5	23.0	23.0	23.4	23.9	22.5	23.0	23.0	23.4	23.9
	6H	22.9	23.2	23.4	23.7	24.2	22.9	23.2	23.4	23.7	24.2
	8H	23.0	23.4	23.5	23.8	24.4	23.0	23.4	23.5	23.8	24.4
	12H	23.1	23.4	23.7	23.9	24.4	23.1	23.4	23.7	23.9	24.4
12H	4H	22.5	22.9	23.0	23.4	23.9	22.5	22.9	23.0	23.4	23.9
	6H	22.9	23.2	23.4	23.7	24.2	22.9	23.2	23.4	23.7	24.2
	8H	23.1	23.3	23.6	23.8	24.4	23.1	23.3	23.6	23.8	24.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	52561.1
50°	40456.4
55°	33235.7
60°	29298.1
65°	27086.3
70°	25950.9
75°	25461.8
80°	26499.2
85°	19377.4


Photometric test report

Family Spot 11	Order number: 51SD14EAD5A EAN: 4058352767740	LP number 59368_5
---------------------------------	---	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

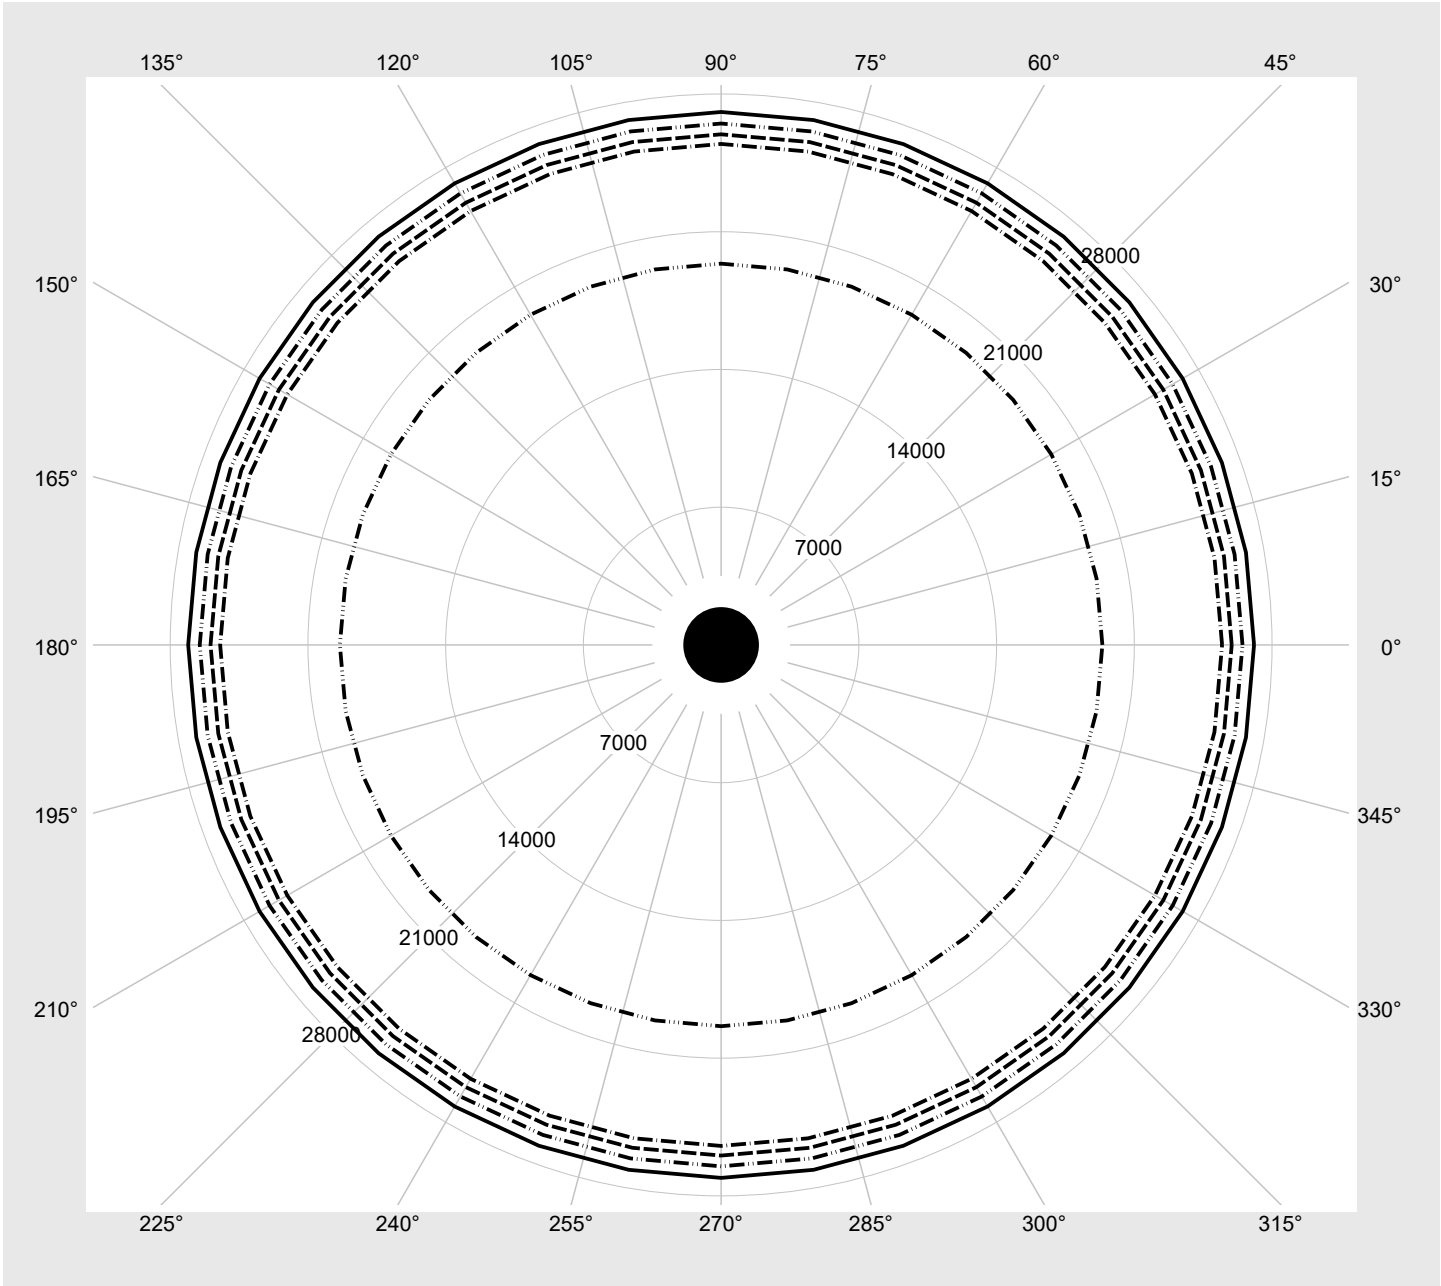

Photometric test report

Family Spot 11	Order number: 51SD14EAD5A EAN: 4058352767740	LP number 59368_5
--------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	7420	51.1
14	ON	ON	ON	OFF	7030	48.4
13	ON	ON	OFF	ON	6700	45.8
12	ON	ON	OFF	OFF	6410	43.5
11	ON	OFF	ON	ON	6010	40.7
10	ON	OFF	ON	OFF	5670	38.4
9	ON	OFF	OFF	ON	5290	35.8
8	ON	OFF	OFF	OFF	4990	33.6
7	OFF	ON	ON	ON	4700	31.4
6	OFF	ON	ON	OFF	4390	29.1
5	OFF	ON	OFF	ON	4040	26.6
4	OFF	ON	OFF	OFF	3720	24.3
3	OFF	OFF	ON	ON	3310	21.6
2	OFF	OFF	ON	OFF	2970	19.3
1	OFF	OFF	OFF	ON	2590	16.8
0	OFF	OFF	OFF	OFF	2240	14.4