




Photometric test report

Family Spot 11	Order number: 51SD15MBB5A EAN: 4058352716441	LP number 59369_8										
	<table border="0"> <tr> <td>Version</td> <td>reflector, cover panel, PC, clear, extremely wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=10</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 5750 lm Power consumption = 37.7 W Luminous efficacy = 152.5 lm/W </td> </tr> </table>	Version	reflector, cover panel, PC, clear, extremely wide distribution	Lamps	LED 3000 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=10	Rated values	Net luminous flux = 5750 lm Power consumption = 37.7 W Luminous efficacy = 152.5 lm/W	serial documentation 23.12.2022 
Version	reflector, cover panel, PC, clear, extremely wide distribution											
Lamps	LED 3000 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=10											
Rated values	Net luminous flux = 5750 lm Power consumption = 37.7 W Luminous efficacy = 152.5 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 1178 cd/klm**

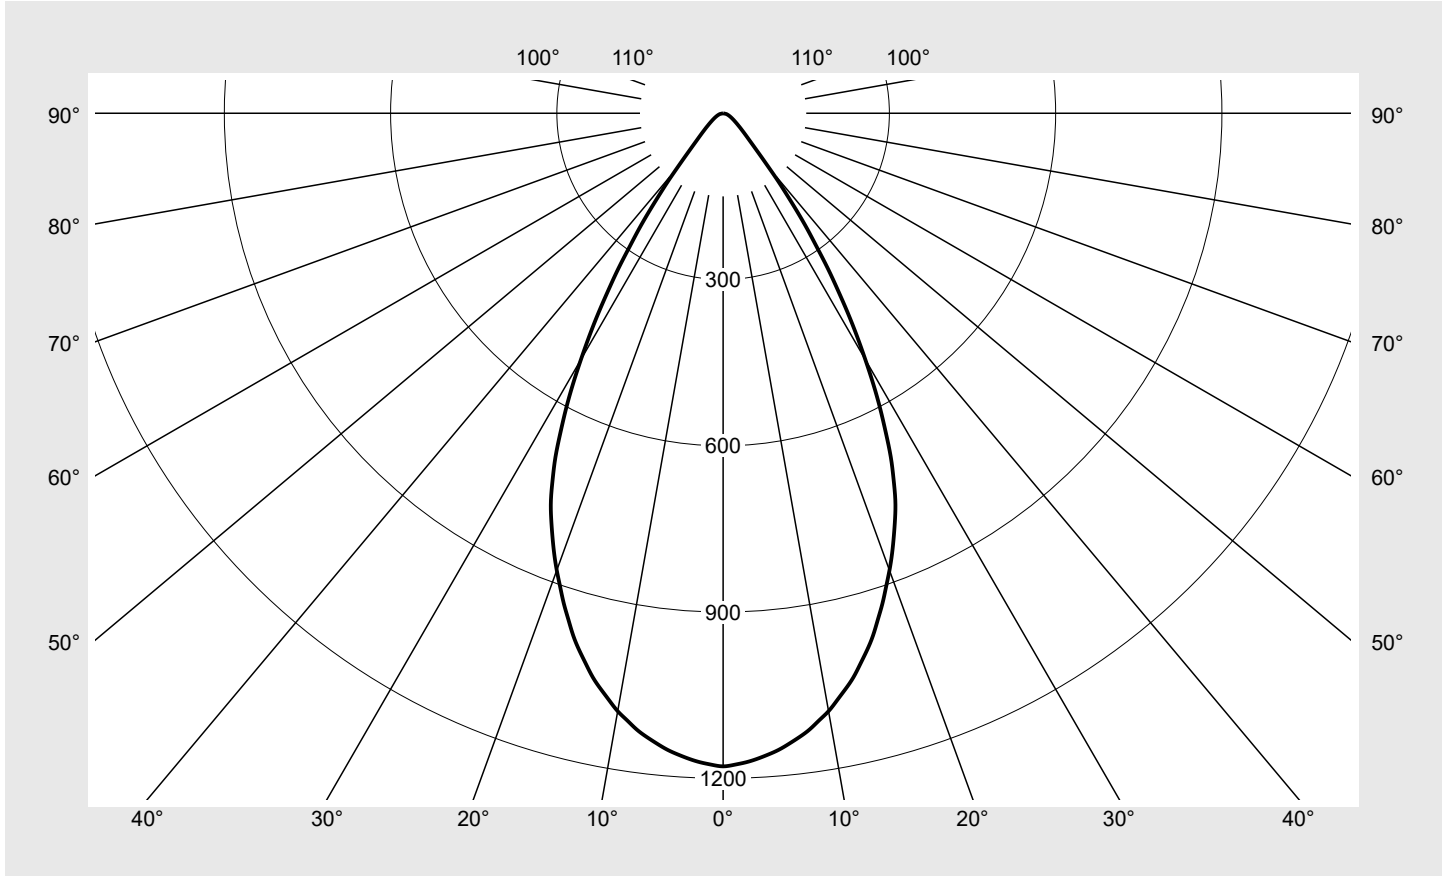

Classifications	
DIN 5040	A 7 0
CIE	N1=91 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 11	Order number: 51SD15MBB5A EAN: 4058352716441	LP number 59369_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1178.4	0.3	0.3
1°	1175.7	2.3	2.5
2°	1171.9	4.5	7.0
3°	1166.6	6.7	13.7
4°	1160.1	8.9	22.6
5°	1152.9	11.0	33.6
6°	1143.6	13.1	46.7
7°	1133.7	15.2	61.9
8°	1122.6	17.1	79.0
9°	1108.8	19.0	98.0
10°	1095.5	20.9	118.9
11°	1078.8	22.6	141.5
12°	1062.1	24.2	165.7
13°	1044.7	25.8	191.4
14°	1023.8	27.2	218.6
15°	1003.1	28.5	247.1
16°	980.8	29.6	276.7
17°	955.1	30.6	307.3
18°	930.2	31.5	338.9
19°	903.4	32.3	371.1
20°	877.6	32.9	404.0
21°	850.7	33.4	437.5
22°	822.4	33.8	471.2
23°	794.1	34.0	505.3
24°	763.9	34.1	539.3
25°	727.5	33.7	573.1
26°	690.1	33.2	606.2
27°	646.6	32.2	638.4
28°	603.7	31.1	669.5
29°	559.1	29.7	699.2
30°	513.2	28.1	727.4
31°	468.5	26.5	753.8
32°	424.0	24.6	778.5
33°	379.2	22.6	801.1
34°	338.0	20.7	821.8
35°	294.8	18.5	840.4
36°	258.7	16.7	857.1
37°	222.0	14.6	871.7
38°	187.4	12.7	884.4
39°	158.5	10.9	895.3
40°	130.3	9.2	904.5
41°	108.7	7.8	912.3
42°	92.1	6.8	919.1
43°	79.7	6.0	925.0
44°	70.0	5.3	930.3
45°	62.5	4.8	935.2
46°	56.3	4.4	939.6

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	51.1	4.1	943.7
48°	46.5	3.8	947.5
49°	42.6	3.5	951.1
50°	39.2	3.3	954.3
51°	35.9	3.1	957.4
52°	33.2	2.9	960.3
53°	30.8	2.7	963.0
54°	28.5	2.5	965.5
55°	26.5	2.4	967.9
56°	24.7	2.2	970.1
57°	23.1	2.1	972.3
58°	21.6	2.0	974.3
59°	20.2	1.9	976.2
60°	18.9	1.8	978.0
61°	17.8	1.7	979.7
62°	16.6	1.6	981.3
63°	15.6	1.5	982.8
64°	14.6	1.4	984.2
65°	13.7	1.4	985.6
66°	12.9	1.3	986.9
67°	12.0	1.2	988.1
68°	11.3	1.1	989.3
69°	10.5	1.1	990.3
70°	9.8	1.0	991.3
71°	9.2	0.9	992.3
72°	8.5	0.9	993.2
73°	7.9	0.8	994.0
74°	7.4	0.8	994.8
75°	6.8	0.7	995.5
76°	6.3	0.7	996.2
77°	5.8	0.6	996.8
78°	5.4	0.6	997.4
79°	4.9	0.5	997.9
80°	4.4	0.5	998.4
81°	3.8	0.4	998.8
82°	3.3	0.4	999.1
83°	2.5	0.3	999.4
84°	1.9	0.2	999.6
85°	1.4	0.2	999.8
86°	1.0	0.1	999.9
87°	0.5	0.1	1000.0
88°	0.2	0.0	1000.0
89°	0.2	0.0	1000.0
90°	0.1	0.0	1000.0

Photometric test report

Family Spot 11	Order number: 51SD15MBB5A EAN: 4058352716441	LP number 59369_8
-------------------	---	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	25.0	26.1	25.3	26.5	26.8	25.0	26.1	25.3	26.5	26.8
	3H	25.1	26.1	25.5	26.5	26.8	25.1	26.1	25.5	26.5	26.8
	4H	25.2	26.1	25.5	26.5	26.8	25.2	26.1	25.5	26.5	26.8
	6H	25.2	26.1	25.6	26.5	26.8	25.2	26.1	25.6	26.5	26.8
	8H	25.4	26.1	25.8	26.4	26.8	25.4	26.1	25.8	26.4	26.8
	12H	25.3	26.0	25.8	26.4	26.8	25.3	26.0	25.8	26.4	26.8
4H	2H	24.9	25.9	25.3	26.2	26.6	24.9	25.9	25.3	26.2	26.6
	3H	25.1	25.9	25.5	26.3	26.7	25.1	25.9	25.5	26.3	26.7
	4H	25.2	25.9	25.7	26.3	26.8	25.2	25.9	25.7	26.3	26.8
	6H	25.3	25.9	25.8	26.4	26.9	25.3	25.9	25.8	26.4	26.9
	8H	25.4	25.9	25.9	26.4	26.9	25.4	25.9	25.9	26.4	26.9
	12H	25.5	25.9	25.9	26.3	26.8	25.5	25.9	25.9	26.3	26.8
8H	4H	25.2	25.7	25.7	26.2	26.7	25.2	25.7	25.7	26.2	26.7
	6H	25.4	25.8	25.9	26.3	26.8	25.4	25.8	25.9	26.3	26.8
	8H	25.5	25.8	26.0	26.3	26.9	25.5	25.8	26.0	26.3	26.9
	12H	25.5	25.8	26.0	26.3	26.8	25.5	25.8	26.0	26.3	26.8
12H	4H	25.2	25.7	25.7	26.1	26.6	25.2	25.7	25.7	26.1	26.6
	6H	25.4	25.8	25.9	26.2	26.8	25.4	25.8	25.9	26.2	26.8
	8H	25.5	25.8	26.0	26.3	26.8	25.5	25.8	26.0	26.3	26.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 79
-----------------	---------------------------------	-------------------------------	--------

C-planes	0°
γ	Luminance in cd/m ²
45°	103733.8
50°	71509.7
55°	54246.5
60°	44412.4
65°	38146.7
70°	33722.0
75°	30842.9
80°	29386.2
85°	19166.3

Photometric test report

Family Spot 11	Order number: 51SD15MBB5A EAN: 4058352716441	LP number 59369_8
---------------------------------	---	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

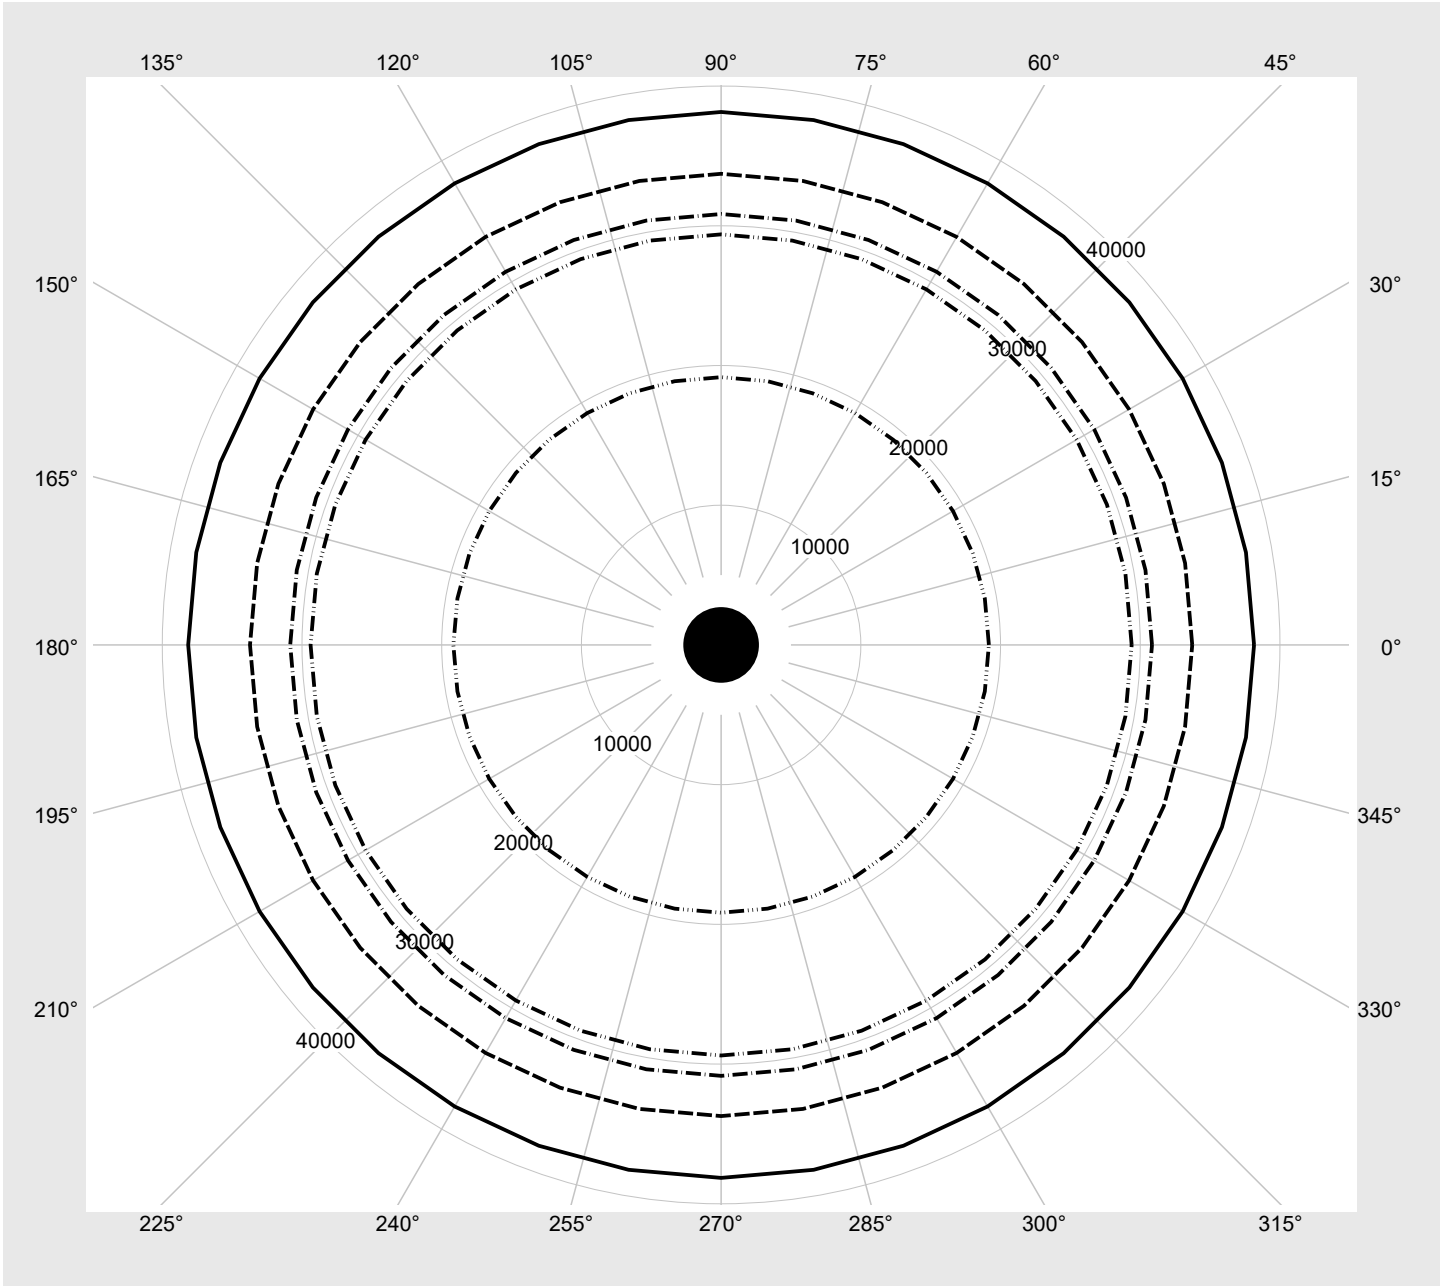

Photometric test report

Family Spot 11	Order number: 51SD15MBB5A EAN: 4058352716441	LP number 59369_8
--------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	7370	50.2
14	ON	ON	ON	OFF	7090	47.7
13	ON	ON	OFF	ON	6760	45.1
12	ON	ON	OFF	OFF	6420	42.8
11	ON	OFF	ON	ON	6090	40.0
10	ON	OFF	ON	OFF	5750	37.7
9	ON	OFF	OFF	ON	5430	35.3
8	ON	OFF	OFF	OFF	5120	33.0
7	OFF	ON	ON	ON	4780	31.0
6	OFF	ON	ON	OFF	4450	28.7
5	OFF	ON	OFF	ON	4120	26.2
4	OFF	ON	OFF	OFF	3760	23.9
3	OFF	OFF	ON	ON	3410	21.3
2	OFF	OFF	ON	OFF	3080	19.0
1	OFF	OFF	OFF	ON	2650	16.5
0	OFF	OFF	OFF	OFF	2220	14.2