

## Photometric test report

**Family**  
Licross® 11 Recessed

**Order number: 51UL1EDV4E5F00S**  
**EAN: 4058352608319**

**LP number**  
**59263\_17**



**Version** cover frosted, elliptical narrow distribution  
**Lamps** LED 4000 K | CRI ≥ 80  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 14910 lm  
 Power consumption = 89.6 W  
 Luminous efficacy = 166.4 lm/W

**serial**  
**documentation**  
**22.02.2022**


**sitEco**

**Luminous intensity in cd/klm**

**C180-0**

**C270-90**

**Imax: 1670 cd/klm**

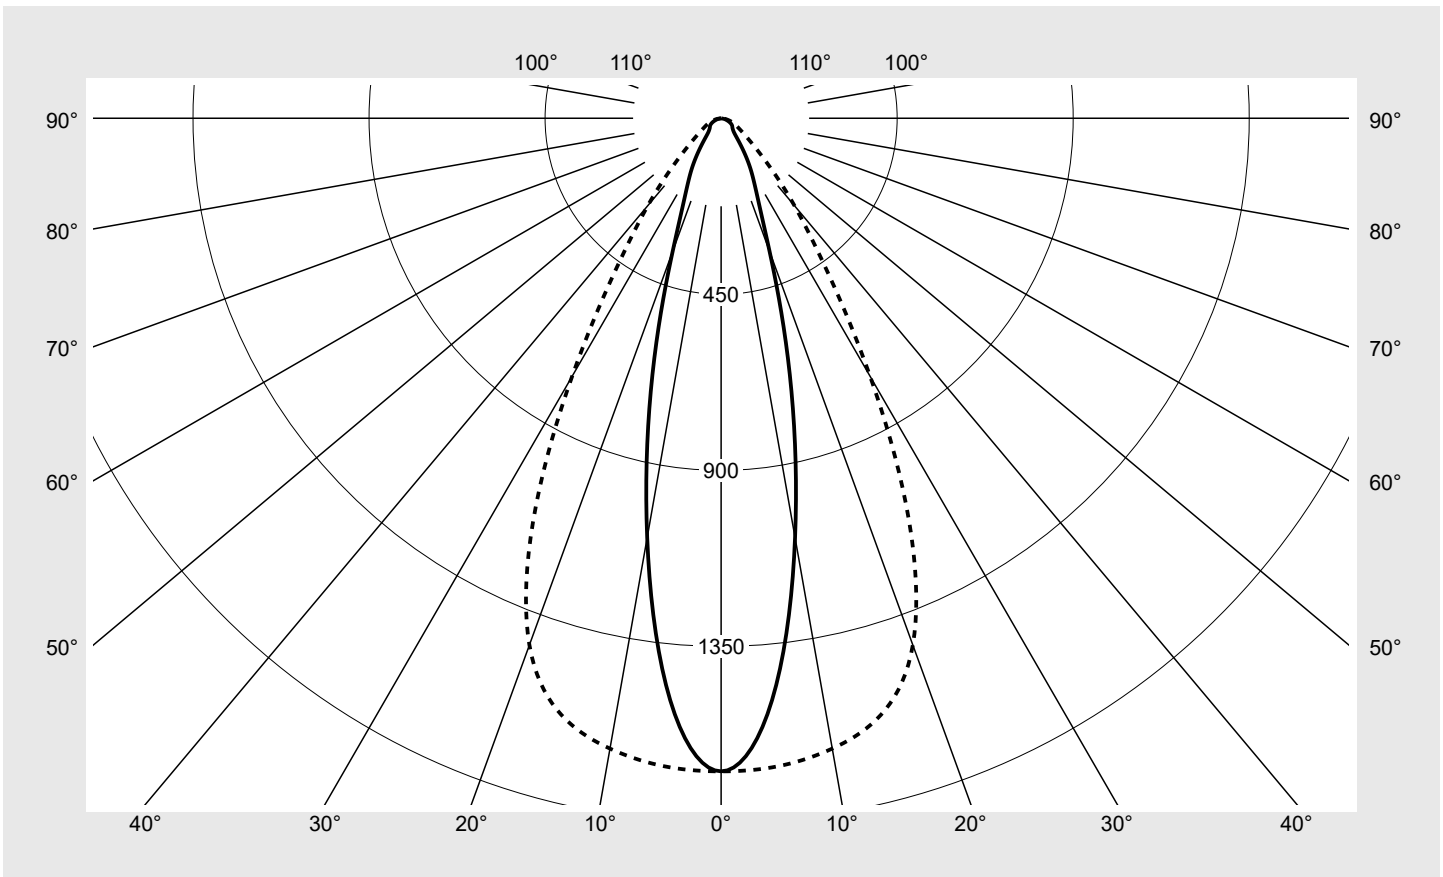

### Classifications

DIN 5040 A 7 0  
 CIE N1=85 N2=95 N3=99  
 N4=100 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51UL1EDV4E5F00S</b> <b>EAN: 4058352608319</b>	<b>LP number</b> <b>59263_17</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	10.0	10.0
5°	1493.3	1495.6	1516.6	1565.9	1616.3	1649.8	1662.9	75.0	85.0
10°	1088.5	1106.7	1175.0	1303.4	1460.6	1586.1	1636.2	126.8	211.8
15°	678.3	712.7	825.0	1006.5	1239.9	1474.8	1578.7	151.0	362.9
20°	362.1	388.9	492.0	707.6	980.6	1275.8	1432.9	148.2	511.0
25°	217.8	231.1	285.8	436.7	705.9	972.9	1137.5	127.8	638.8
30°	151.3	158.5	185.3	264.1	455.8	646.3	761.7	99.0	737.8
35°	95.4	107.0	131.3	171.8	268.4	391.1	463.8	70.7	808.5
40°	57.7	64.5	93.9	120.6	157.9	239.7	291.4	50.0	858.5
45°	43.5	45.9	58.2	86.3	99.5	145.4	176.9	35.2	893.7
50°	37.7	39.0	42.8	61.0	68.3	89.3	109.1	26.2	919.9
55°	34.6	35.0	36.7	43.5	50.5	59.6	73.7	20.9	940.8
60°	30.2	31.1	32.8	34.2	38.6	42.0	53.5	17.5	958.3
65°	23.9	25.4	29.1	28.1	30.1	30.8	41.3	14.6	972.8
70°	17.0	18.4	22.5	23.3	23.4	22.7	30.8	11.5	984.3
75°	10.9	12.0	16.2	17.9	17.4	15.7	20.7	8.4	992.7
80°	6.2	6.7	9.0	10.7	11.0	9.3	11.6	5.0	997.7
85°	3.1	3.3	4.2	5.0	4.8	3.9	4.2	2.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51UL1EDV4E5F00S</b> <b>EAN: 4058352608319</b>	<b>LP number</b> 59263_17
---------------------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.1	16.4	15.5	16.7	17.0	20.1	21.4	20.5	21.7	22.0
	3H	16.3	17.4	16.7	17.7	18.1	20.7	21.8	21.1	22.1	22.5
	4H	16.7	17.7	17.1	18.1	18.4	21.0	22.0	21.4	22.3	22.7
	6H	16.9	17.8	17.3	18.2	18.6	21.2	22.1	21.6	22.4	22.8
	8H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
	12H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
4H	2H	16.0	16.9	16.4	17.3	17.6	20.1	21.2	20.5	21.5	21.9
	3H	17.4	18.2	17.8	18.6	19.0	20.8	21.7	21.3	22.1	22.5
	4H	17.9	18.6	18.3	19.0	19.5	21.2	22.0	21.7	22.4	22.8
	6H	18.2	18.8	18.6	19.3	19.7	21.5	22.1	22.0	22.6	23.0
	8H	18.3	18.9	18.8	19.3	19.8	21.6	22.2	22.1	22.6	23.1
	12H	18.4	18.9	18.9	19.3	19.8	21.7	22.2	22.2	22.6	23.1
8H	4H	18.4	18.9	18.8	19.4	19.8	21.3	21.9	21.8	22.3	22.8
	6H	18.8	19.3	19.3	19.7	20.3	21.7	22.2	22.2	22.6	23.2
	8H	19.0	19.4	19.5	19.9	20.4	21.8	22.3	22.4	22.7	23.3
	12H	19.1	19.4	19.6	19.9	20.5	21.9	22.3	22.5	22.8	23.3
12H	4H	18.4	18.9	18.9	19.3	19.8	21.3	21.8	21.8	22.3	22.8
	6H	18.9	19.3	19.4	19.8	20.3	21.7	22.1	22.2	22.6	23.1
	8H	19.1	19.5	19.6	20.0	20.5	21.9	22.2	22.4	22.7	23.3


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 2250</b> <b>B = 58</b>
------------------------	---	--------------------------------------	----------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		7026.9	7412.4	9396.1	13940.6	16082.5	23493.4	28589.6	
50°		6708.0	6928.5	7607.0	10848.7	12142.0	15878.0	19398.5	
55°		6884.5	6968.0	7314.4	8660.0	10062.7	11877.1	14684.4	
60°		6890.8	7117.3	7498.4	7821.1	8818.7	9592.9	12223.2	
65°		6468.8	6859.7	7871.6	7599.1	8145.5	8321.0	11169.0	
70°		5671.2	6134.2	7509.2	7790.8	7815.5	7572.0	10298.2	
75°		4792.7	5301.2	7148.7	7916.3	7687.7	6948.7	9132.9	
80°		4049.1	4378.7	5925.6	7011.8	7217.8	6111.1	7645.4	
85°		4096.6	4369.2	5559.5	6589.9	6313.3	5104.7	5470.4	

**Photometric test report**

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51UL1EDV4E5F00S</b> <b>EAN: 4058352608319</b>	<b>LP number</b> 59263_17
---------------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**      γ 65°    γ 70°    γ 75°    γ 80°    γ 85°      **siteco**

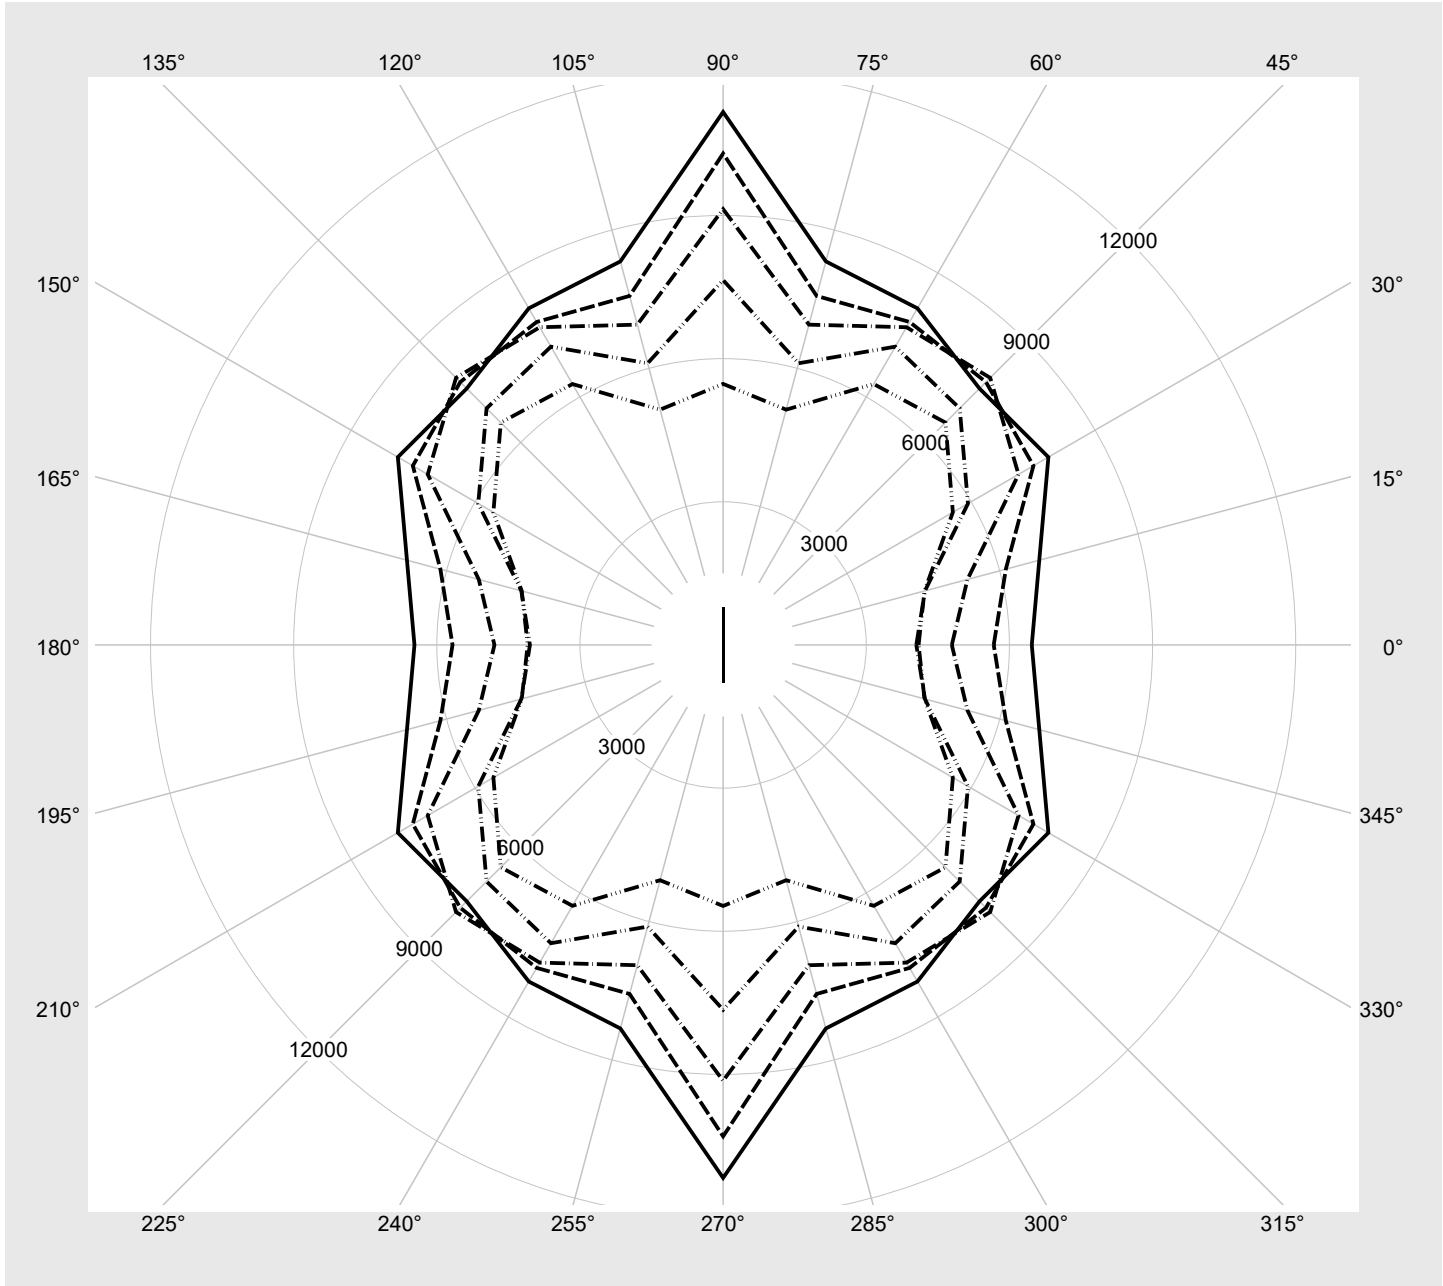

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51UL1EDV4E5F00S</b> <b>EAN: 4058352608319</b>	<b>LP number</b> 59263_17
---------------------------------------	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14910	89.6
95	240	252	14159	84.4
90	226	250	13400	79.3
85	213	248	12686	74.6
80	199	245	11908	69.6
75	186	243	11177	64.9
70	173	240	10438	60.4
65	160	237	9694	55.7
60	147	234	8939	51.2
55	134	231	8182	46.8
50	122	227	7471	42.6
45	109	223	6694	38.3
40	97	219	5971	34.3
35	85	214	5241	30.2
30	72	208	4443	25.9
25	60	201	3699	22.0
20	49	194	3013	18.5
15	37	183	2257	14.6
10	25	169	1496	10.5
5	13	145	728	6.7
2	6	117	278	4.5