




Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
	Version post-top- or mounting to wall arm Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2700 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 3800 lm Power consumption = 33.6 W Luminous efficacy = 113.1 lm/W	serial documentation 04.11.2022

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 839 cd/klm**

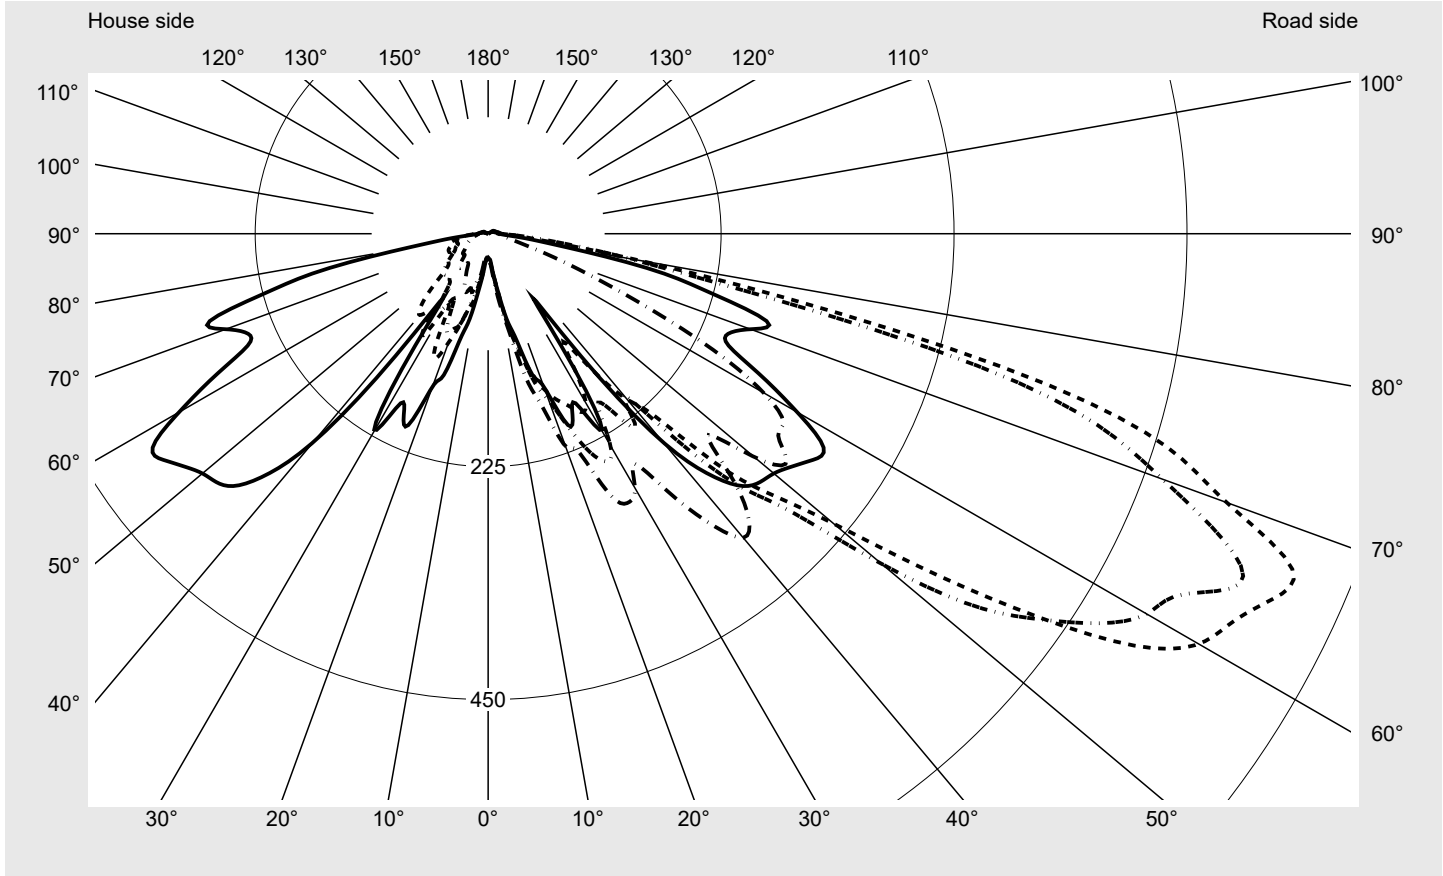

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.5%
Eta 90° - 180°	2.5%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	759.0
Imax 80°	170.3
Imax 90°	12.9
Imax >90°	11.8
Imax >95°	9.9


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
---	---	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

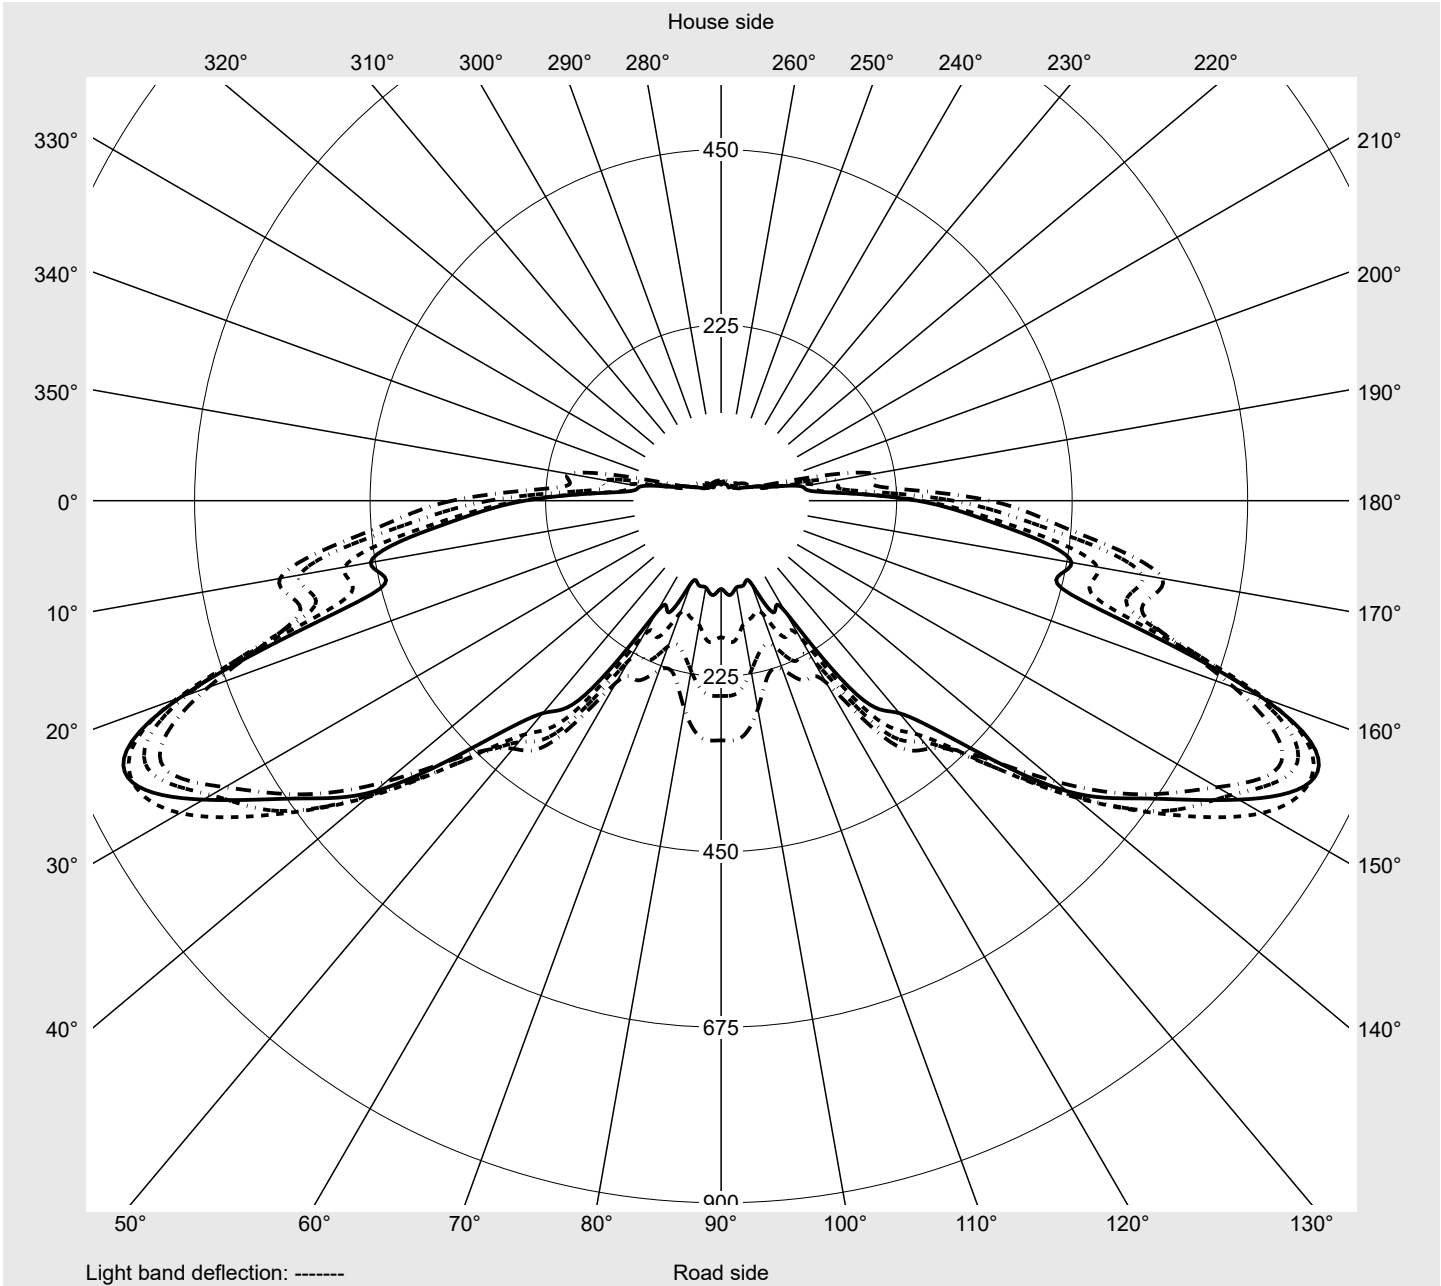

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9
2,5°	24.9	24.9	25.3	24.9	25.3	25.3	25.4	25.4	26.0	25.6	26.4	26.0	26.4
5,0°	26.6	26.8	27.7	27.9	29.4	29.4	31.1	30.4	31.9	30.6	31.7	30.2	32.1
7,5°	41.0	39.5	42.7	41.0	41.2	41.0	42.2	42.7	44.2	43.3	42.5	38.7	40.6
10,0°	59.8	49.9	54.9	55.6	60.2	61.0	66.7	65.5	71.4	66.3	69.7	65.3	64.8
12,5°	86.8	86.0	91.2	88.9	97.4	93.2	91.5	94.2	96.1	98.6	100.1	91.9	95.7
15,0°	107.1	108.6	111.1	115.6	120.6	119.4	117.5	136.2	149.3	136.0	133.5	124.0	115.3
17,5°	143.8	136.2	130.3	138.8	155.1	142.4	151.9	151.7	162.4	162.4	162.7	157.8	156.1
20,0°	157.2	177.0	170.7	175.1	196.4	160.8	171.5	171.9	177.6	169.2	172.8	166.5	175.8
22,5°	199.0	203.0	201.7	214.2	211.7	173.8	201.9	184.6	188.6	178.9	190.7	199.6	195.0
25,0°	192.7	179.8	178.5	187.4	202.6	183.2	232.8	223.1	220.3	208.9	215.9	205.1	209.5
27,5°	186.1	193.5	199.8	215.0	229.6	194.3	248.0	253.7	249.9	232.4	214.8	205.5	205.3
30,0°	219.3	229.4	238.7	240.4	238.7	188.6	236.2	233.0	258.6	248.6	232.2	209.5	208.5
32,5°	155.7	196.5	212.1	226.5	211.0	156.3	197.3	175.3	195.6	203.8	210.0	207.0	220.8
35,0°	75.8	60.6	73.5	123.1	156.9	127.4	209.8	191.8	210.4	207.7	234.7	225.8	235.9
37,5°	164.8	124.8	118.7	105.4	140.9	167.9	234.0	250.7	266.6	246.3	252.8	238.7	242.5
40,0°	262.8	256.2	256.7	228.8	235.5	209.3	202.6	204.3	242.3	294.9	292.1	264.5	271.6
42,5°	314.7	305.5	324.7	303.3	290.4	240.4	272.7	223.7	251.8	263.2	273.1	271.7	295.7
45,0°	344.3	340.5	372.4	357.8	310.7	319.8	346.7	315.4	338.0	318.6	302.5	275.2	282.8
47,5°	355.5	375.8	429.2	419.5	329.3	374.7	398.0	359.9	360.6	346.9	353.6	321.9	296.4
50,0°	360.2	409.6	479.3	471.5	351.1	435.8	496.0	444.7	399.0	356.2	356.2	324.2	303.3
52,5°	369.5	417.2	501.1	519.4	456.9	533.6	589.8	531.5	453.1	414.4	395.6	362.7	316.9
55,0°	381.5	431.3	507.4	530.0	553.7	641.8	649.1	575.2	487.8	449.7	419.1	384.0	302.1
57,5°	384.2	449.3	542.5	571.6	638.4	740.6	700.1	604.8	522.0	460.3	422.7	386.8	293.2
60,0°	344.7	454.2	574.2	559.8	700.0	792.4	734.5	656.3	560.0	461.3	414.9	376.9	269.1
62,5°	297.6	423.7	548.0	544.1	729.2	811.2	754.8	693.3	587.5	474.9	404.1	357.8	236.0
65,0°	256.5	378.5	489.9	506.3	742.9	835.5	800.8	701.5	591.1	473.2	391.0	333.6	200.9
67,5°	251.6	359.1	456.1	464.3	738.3	839.3	766.4	665.6	579.6	444.7	355.7	303.6	163.9
70,0°	269.7	379.8	407.7	455.2	681.9	759.0	693.1	616.2	511.4	397.8	320.2	273.3	131.6
72,5°	282.8	395.0	358.9	487.5	634.8	689.3	619.4	530.0	410.0	332.7	264.9	225.8	106.2
75,0°	224.8	325.9	296.8	427.6	522.6	551.8	481.4	381.9	273.1	228.8	207.7	189.7	89.6
77,5°	166.5	219.7	191.8	297.2	321.5	321.9	252.2	213.1	167.1	158.0	157.2	162.4	66.7
80,0°	81.7	103.7	91.0	170.3	151.9	147.4	138.2	139.2	115.6	90.8	72.0	84.7	31.3
82,5°	41.4	54.5	51.8	84.5	61.9	60.0	76.7	94.9	72.2	47.1	31.7	23.9	14.6
85,0°	19.7	26.0	26.0	31.7	23.9	34.8	41.8	44.2	28.5	23.0	16.1	14.6	12.2
87,5°	12.9	15.6	15.4	17.5	17.5	19.7	20.9	20.3	17.5	14.8	13.1	12.5	10.4
90,0°	9.5	12.0	12.3	12.7	12.9	12.9	12.5	12.2	11.6	11.8	11.2	10.6	9.9
92,5°	9.3	11.0	11.2	11.8	11.6	11.8	11.4	11.2	10.6	10.6	10.4	10.1	9.7
95,0°	8.5	9.5	9.7	10.3	10.6	10.8	10.4	10.3	9.9	9.7	9.7	9.5	9.3
97,5°	7.8	8.5	8.9	8.9	9.3	9.7	9.7	9.5	9.1	9.3	9.1	8.7	8.9
100,0°	7.0	7.4	7.8	8.2	8.2	8.5	8.5	8.5	8.2	8.5	8.4	8.4	8.2
102,5°	6.3	6.6	7.0	7.0	7.4	7.8	7.8	7.8	7.6	7.6	7.6	7.6	7.6
105,0°	5.9	5.9	6.3	6.6	6.6	7.0	7.0	7.0	7.0	7.0	7.0	7.2	7.2
107,5°	5.3	5.5	5.7	6.1	6.3	6.6	6.6	6.5	6.6	6.6	6.6	6.6	6.8
110,0°	5.1	5.1	5.5	5.9	6.1	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
112,5°	4.7	5.1	5.3	5.5	5.9	6.1	6.3	6.1	6.1	6.1	6.1	6.3	6.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9
2,5°	25.8	26.4	26.0	26.8	26.2	27.0	25.1	24.7	24.7	24.3	24.5	23.7	23.7
5,0°	31.1	32.7	31.3	32.1	31.0	31.5	26.0	25.4	25.3	25.1	24.9	24.5	24.3
7,5°	40.4	42.2	42.0	46.5	47.5	50.1	41.2	35.7	38.9	33.6	38.7	31.7	36.3
10,0°	58.1	59.2	63.4	71.2	68.0	74.1	61.1	65.5	59.2	58.5	52.6	47.9	44.4
12,5°	83.7	89.6	92.5	100.6	99.9	102.5	80.9	82.8	82.6	73.7	67.8	62.3	62.5
15,0°	108.4	111.8	122.9	140.7	138.8	148.5	102.5	83.6	92.5	83.6	76.5	77.3	77.7
17,5°	153.8	162.2	164.4	169.2	167.1	176.6	135.0	105.0	120.0	106.9	94.9	92.9	92.3
20,0°	176.0	180.8	167.3	185.9	211.0	218.4	148.9	115.1	134.1	122.1	111.8	98.0	94.4
22,5°	209.6	205.7	183.6	194.6	214.8	227.5	185.5	130.3	149.4	145.7	129.7	103.3	83.7
25,0°	224.5	227.9	221.0	240.0	265.5	277.6	178.5	126.3	146.2	150.0	121.0	89.3	68.4
27,5°	230.3	236.4	244.6	260.2	285.8	292.8	182.3	116.8	121.2	98.7	86.6	71.2	60.6
30,0°	234.9	239.6	252.4	250.7	274.6	283.7	160.7	66.5	98.0	87.4	83.9	79.4	70.3
32,5°	245.2	251.8	263.2	236.4	257.9	263.6	122.9	52.4	121.9	123.1	116.2	88.1	57.7
35,0°	270.6	254.1	267.4	256.9	288.3	306.1	109.0	122.7	135.2	127.8	102.9	78.2	51.8
37,5°	267.8	261.3	298.3	297.0	337.3	353.6	182.1	159.1	135.2	117.0	95.3	61.5	44.4
40,0°	294.0	288.5	331.2	330.4	369.0	383.2	245.3	168.6	171.9	135.4	102.5	58.1	47.5
42,5°	332.3	305.5	347.1	337.3	367.4	372.2	293.2	192.0	195.0	151.5	97.0	54.5	53.9
45,0°	307.1	282.6	316.7	307.3	331.7	332.3	306.1	232.6	204.1	151.9	83.2	56.2	58.5
47,5°	295.5	269.7	293.8	277.4	291.9	288.3	292.1	245.7	210.2	139.2	65.3	57.5	57.5
50,0°	309.9	282.6	299.3	287.3	321.1	335.4	275.0	260.9	212.5	120.8	52.8	54.5	53.2
52,5°	312.0	293.4	317.9	323.4	358.3	363.1	265.9	279.5	202.2	102.2	48.0	51.8	48.6
55,0°	295.1	285.6	312.9	317.5	343.3	342.2	262.6	275.9	182.5	82.4	46.9	47.9	44.8
57,5°	272.5	254.3	267.9	301.6	330.8	338.0	248.6	248.2	148.5	63.0	45.4	43.5	41.2
60,0°	254.1	230.7	232.1	271.2	304.2	307.3	204.7	197.9	111.7	56.2	43.5	39.9	38.0
62,5°	226.7	198.6	197.5	221.6	246.9	250.3	160.5	151.5	78.2	52.2	41.8	36.7	33.4
65,0°	193.1	153.2	154.2	161.6	181.5	175.1	133.5	120.0	67.2	49.6	41.6	34.9	30.4
67,5°	158.0	112.8	111.8	113.0	121.5	113.2	128.7	105.0	69.3	54.7	41.4	33.8	27.5
70,0°	132.0	87.0	75.0	67.8	75.8	71.0	138.6	111.5	73.7	54.5	39.5	31.3	25.1
72,5°	106.7	68.2	47.9	41.4	43.5	41.8	128.7	107.1	68.0	51.7	37.2	30.6	24.1
75,0°	79.8	45.0	34.0	28.5	28.1	27.0	87.5	76.7	55.4	44.8	37.8	31.5	25.1
77,5°	54.9	26.2	23.9	21.1	20.9	20.1	74.6	62.1	48.4	41.6	36.3	30.6	25.4
80,0°	25.4	16.7	17.1	16.3	16.7	16.3	49.0	46.3	40.6	37.6	31.7	28.7	24.7
82,5°	13.9	12.7	13.1	12.9	13.5	13.3	31.0	32.9	32.3	30.8	27.2	25.4	21.1
85,0°	12.0	11.4	11.6	11.6	12.2	12.2	19.9	21.5	23.5	25.1	22.4	20.7	18.4
87,5°	10.6	10.3	10.8	10.8	11.0	11.0	14.8	16.0	16.0	17.1	15.6	15.8	14.6
90,0°	9.9	9.9	10.4	10.4	10.4	10.6	11.6	11.8	11.4	11.6	11.6	11.6	11.6
92,5°	9.7	9.7	10.3	10.3	10.4	10.6	10.6	10.6	10.1	10.6	10.4	10.6	10.3
95,0°	9.5	9.3	9.7	9.9	10.1	10.3	9.1	9.3	8.7	9.1	8.7	9.1	8.7
97,5°	9.1	9.1	9.3	9.5	9.7	9.9	8.2	8.2	7.6	7.8	7.8	8.0	7.8
100,0°	8.5	8.5	8.9	8.7	9.1	9.1	7.0	7.0	6.6	6.8	6.6	6.8	6.6
102,5°	8.0	8.0	8.2	8.2	8.4	8.4	6.3	6.3	5.9	6.3	5.9	6.1	5.9
105,0°	7.4	7.6	7.6	7.6	7.8	7.6	5.7	5.5	5.3	5.5	5.3	5.5	5.3
107,5°	6.8	6.8	7.0	7.0	7.2	7.2	5.3	5.1	4.7	4.7	4.7	4.9	4.7
110,0°	6.5	6.5	6.6	6.8	6.8	7.2	4.9	4.7	4.4	4.6	4.4	4.6	4.4
112,5°	6.3	6.5	6.5	6.5	6.6	6.8	4.7	4.7	4.2	4.4	4.2	4.4	4.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	0.0	0.0
2,5°	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.5	23.4	23.5	23.5	0.3	0.3
5,0°	23.9	23.9	23.7	23.5	23.7	23.7	23.7	23.5	23.5	23.4	23.5	0.7	1.0
7,5°	31.9	33.8	29.2	30.8	27.3	26.6	25.3	25.3	24.3	23.7	23.5	1.3	2.3
10,0°	40.3	36.7	40.1	38.5	40.1	36.8	37.8	38.2	39.5	43.7	40.3	2.6	4.9
12,5°	59.1	59.1	54.9	54.3	53.4	54.1	45.2	41.8	44.4	45.0	43.7	4.6	9.5
15,0°	72.7	59.4	65.7	64.6	63.6	58.9	39.7	40.6	54.1	58.9	58.1	6.9	16.4
17,5°	78.2	64.6	68.9	65.7	62.9	60.2	53.7	51.5	54.9	57.3	55.1	9.7	26.1
20,0°	76.7	60.0	63.4	60.4	60.2	58.5	49.9	49.0	49.4	54.5	59.6	12.3	38.4
22,5°	65.5	53.6	56.2	54.1	53.9	53.4	49.2	48.8	46.5	57.3	59.2	15.0	53.4
25,0°	56.8	49.9	51.5	49.2	49.4	49.2	49.8	47.9	45.4	51.7	53.6	17.3	70.7
27,5°	53.7	49.4	49.8	47.9	47.3	46.3	46.7	44.1	43.1	45.2	46.7	19.2	89.9
30,0°	56.6	50.3	50.5	47.9	45.4	44.4	44.2	40.4	39.3	39.7	41.4	20.9	110.8
32,5°	48.6	48.0	48.8	46.9	45.0	43.3	41.4	37.8	35.9	35.1	36.1	20.8	131.6
35,0°	49.6	49.8	49.8	48.2	45.0	43.3	41.4	38.9	35.7	33.8	34.6	21.0	152.6
37,5°	44.2	46.3	47.1	45.8	44.4	43.5	43.3	40.4	38.2	37.8	39.5	25.2	177.8
40,0°	43.7	40.3	40.3	39.9	39.7	40.1	41.2	39.7	40.1	41.0	43.3	31.2	209.1
42,5°	50.3	44.2	39.1	36.7	35.9	35.5	36.7	36.3	37.6	37.6	39.9	35.8	244.8
45,0°	53.7	48.4	43.3	38.5	35.5	33.6	32.3	32.3	33.4	33.6	34.9	40.0	284.8
47,5°	52.6	47.1	43.3	39.7	36.8	34.9	31.5	31.5	31.3	31.0	30.8	43.5	328.4
50,0°	48.6	44.8	41.4	37.6	35.5	34.0	31.3	32.3	31.1	31.5	30.8	48.2	376.6
52,5°	44.4	24.1	38.5	34.9	32.9	31.9	29.4	31.7	30.6	31.3	30.8	54.3	430.9
55,0°	40.4	37.4	35.1	31.5	30.0	29.6	28.3	29.8	28.7	29.1	28.1	58.1	489.1
57,5°	37.4	34.0	31.9	29.1	27.2	27.2	26.8	27.9	27.0	27.2	26.2	60.8	549.8
60,0°	34.8	31.0	29.4	26.8	25.1	25.4	25.6	26.0	26.0	26.0	24.7	61.5	611.3
62,5°	31.5	27.7	27.0	24.7	23.0	23.9	24.5	24.5	25.1	24.7	23.5	60.1	671.4
65,0°	27.9	24.9	24.5	23.2	21.1	22.2	23.2	23.2	23.7	23.2	22.0	57.7	729.1
67,5°	25.3	23.0	22.6	21.5	19.6	20.7	21.8	21.8	22.4	21.8	20.5	54.5	783.6
70,0°	23.4	21.3	21.1	19.7	17.7	19.0	20.3	20.3	21.1	20.5	19.0	50.5	834.2
72,5°	22.0	20.3	19.6	18.8	16.3	18.0	19.2	19.4	19.6	19.4	17.9	45.9	880.0
75,0°	21.6	19.6	18.2	17.5	15.4	17.1	18.0	18.2	18.4	18.2	16.7	36.6	916.6
77,5°	21.8	19.4	17.5	16.7	14.2	16.0	16.5	16.9	17.1	16.7	15.2	24.9	941.6
80,0°	21.6	18.8	16.9	15.8	12.9	14.4	15.0	15.0	15.2	14.8	13.3	14.6	956.1
82,5°	19.6	16.9	15.6	14.1	11.2	12.9	13.5	13.5	13.5	13.3	11.4	8.6	964.7
85,0°	16.9	15.0	13.9	12.9	9.7	12.0	12.3	12.3	12.3	12.2	10.6	5.3	970.0
87,5°	14.2	13.1	12.5	11.8	8.7	11.0	11.6	11.6	11.6	11.4	9.5	3.8	973.8
90,0°	11.8	11.4	11.6	11.2	8.7	10.8	11.2	11.4	11.2	11.0	9.5	3.1	976.9
92,5°	10.4	9.9	10.3	9.9	8.4	9.5	9.9	9.7	10.1	9.7	8.7	2.8	979.7
95,0°	8.7	8.2	8.7	8.4	7.4	7.8	8.2	7.8	8.2	8.0	7.6	2.5	982.2
97,5°	7.4	7.4	7.4	7.0	6.6	6.6	7.0	6.6	6.8	6.8	6.5	2.2	984.4
100,0°	6.6	6.3	6.3	6.3	5.9	5.9	5.9	5.7	5.7	5.7	5.7	2.0	986.4
102,5°	5.9	5.5	5.5	5.5	5.1	5.1	5.1	4.9	4.9	4.9	4.9	1.8	988.2
105,0°	5.1	4.9	4.9	4.7	4.6	4.4	4.4	4.4	4.4	4.2	3.8	1.6	989.8
107,5°	4.7	4.4	4.4	4.0	4.0	3.8	3.6	3.4	3.4	3.6	3.4	1.4	991.2
110,0°	4.4	3.6	3.8	3.6	3.6	3.4	3.4	3.4	3.4	3.2	3.4	1.3	992.5
112,5°	4.0	3.6	3.6	3.4	3.4	3.4	3.4	3.4	3.4	3.2	3.4	1.3	993.8

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
---	---	-------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	4.7	4.9	5.1	5.3	5.5	5.7	6.1	6.1	5.7	6.1	5.9	6.1	5.9
117,5°	4.4	4.7	4.9	4.9	5.3	5.5	5.7	5.5	5.5	5.5	5.7	5.7	5.7
120,0°	4.2	4.6	4.9	4.9	4.9	5.3	5.5	5.5	5.3	5.5	5.5	5.5	5.7
122,5°	3.4	3.8	4.0	4.2	4.4	4.7	4.9	5.1	5.1	5.3	4.9	5.1	5.1
125,0°	2.5	2.7	2.8	3.2	3.2	3.6	3.8	4.0	4.0	4.2	3.8	4.0	3.8
127,5°	1.7	1.7	1.9	2.1	2.1	2.5	2.7	2.8	2.8	2.8	2.7	2.5	2.5
130,0°	1.3	1.7	1.9	1.9	1.9	2.1	2.3	2.5	2.5	2.5	2.5	2.1	2.3
132,5°	1.1	1.3	1.3	1.5	1.7	1.9	1.9	2.1	2.3	2.1	2.1	1.7	1.7
135,0°	0.8	0.9	1.1	1.3	1.3	1.5	1.5	1.7	1.9	1.9	1.7	1.5	1.5
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.1	6.1	6.1	6.1	6.5	6.5	4.4	4.4	4.0	4.0	4.0	4.0	4.0
117,5°	5.9	5.9	5.7	5.7	5.9	6.1	4.2	4.0	3.6	3.6	3.6	3.6	3.6
120,0°	5.7	5.5	5.5	5.5	5.7	5.7	3.8	3.8	3.4	3.4	3.4	3.4	3.2
122,5°	5.1	5.1	5.1	4.9	5.1	4.9	3.2	3.2	2.8	2.8	2.7	2.8	2.8
125,0°	4.0	3.6	3.8	3.6	3.8	3.8	2.3	2.5	1.9	2.1	1.9	2.1	2.1
127,5°	2.5	2.3	2.3	2.1	2.1	2.3	1.5	1.5	1.3	1.5	1.5	1.5	1.5
130,0°	2.3	2.1	1.9	1.7	1.7	1.5	1.5	1.5	1.1	1.3	1.1	1.1	1.1
132,5°	1.9	1.5	1.5	1.3	1.3	1.1	1.1	1.1	1.1	1.1	0.9	0.8	0.9
135,0°	1.3	1.3	1.1	0.9	1.1	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.6	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.2	3.2	3.4	1.2	995.0
117,5°	3.4	3.0	3.2	3.2	3.2	3.4	3.2	3.0	3.2	3.2	3.4	1.1	996.1
120,0°	3.2	3.0	3.0	3.0	3.0	3.2	3.2	3.0	3.2	3.4	3.4	1.0	997.1
122,5°	2.8	2.3	2.7	2.5	2.7	2.8	2.8	2.7	3.0	3.4	3.4	0.9	998.0
125,0°	1.9	1.7	1.9	1.9	2.1	2.3	2.5	2.3	2.7	3.0	3.0	0.7	998.6
127,5°	1.5	1.3	1.5	1.5	1.7	1.9	2.3	2.3	2.5	3.0	3.0	0.5	999.1
130,0°	1.1	0.9	1.3	1.5	1.7	1.9	2.3	2.3	2.5	2.8	3.0	0.4	999.5
132,5°	0.9	0.9	1.1	0.9	1.3	1.7	1.9	2.1	2.3	2.5	2.7	0.3	999.8
135,0°	0.8	0.8	0.9	0.9	1.3	1.3	1.7	1.9	2.1	2.5	2.7	0.2	1000.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245MF14HP EAN: 4058352834664	LP number 58716_21
---	---	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3800	33.6	35.9	34.8
95	241	252	3606	31.3	33.5	32.4
90	229	250	3426	29.4	31.4	30.4
85	216	248	3231	27.3	29.2	28.2
80	203	246	3037	25.4	27.1	26.2
75	190	243	2843	23.5	25.1	24.3
70	178	241	2663	21.9	23.3	22.6
65	165	238	2469	20.1	21.4	20.8
60	152	235	2274	18.4	19.5	19.0
55	140	232	2094	16.8	17.9	17.4
50	127	229	1900	15.2	16.2	15.7
45	114	225	1706	13.6	14.5	14.0
40	102	221	1526	12.2	13.0	12.6
35	89	216	1331	10.7	11.3	11.0
30	76	210	1137	9.2	9.7	9.4
25	63	203	943	7.8	8.2	8.0
20	51	195	763	6.6	6.9	6.8
15	38	184	569	5.2	5.5	5.4
11	28	173	419	4.1	4.4	4.2