




Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (ST0.5a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1940 lm Power consumption = 12.6 W Luminous efficacy = 154 lm/W	serial documentation 16.01.2023





Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 692 cd/klm**

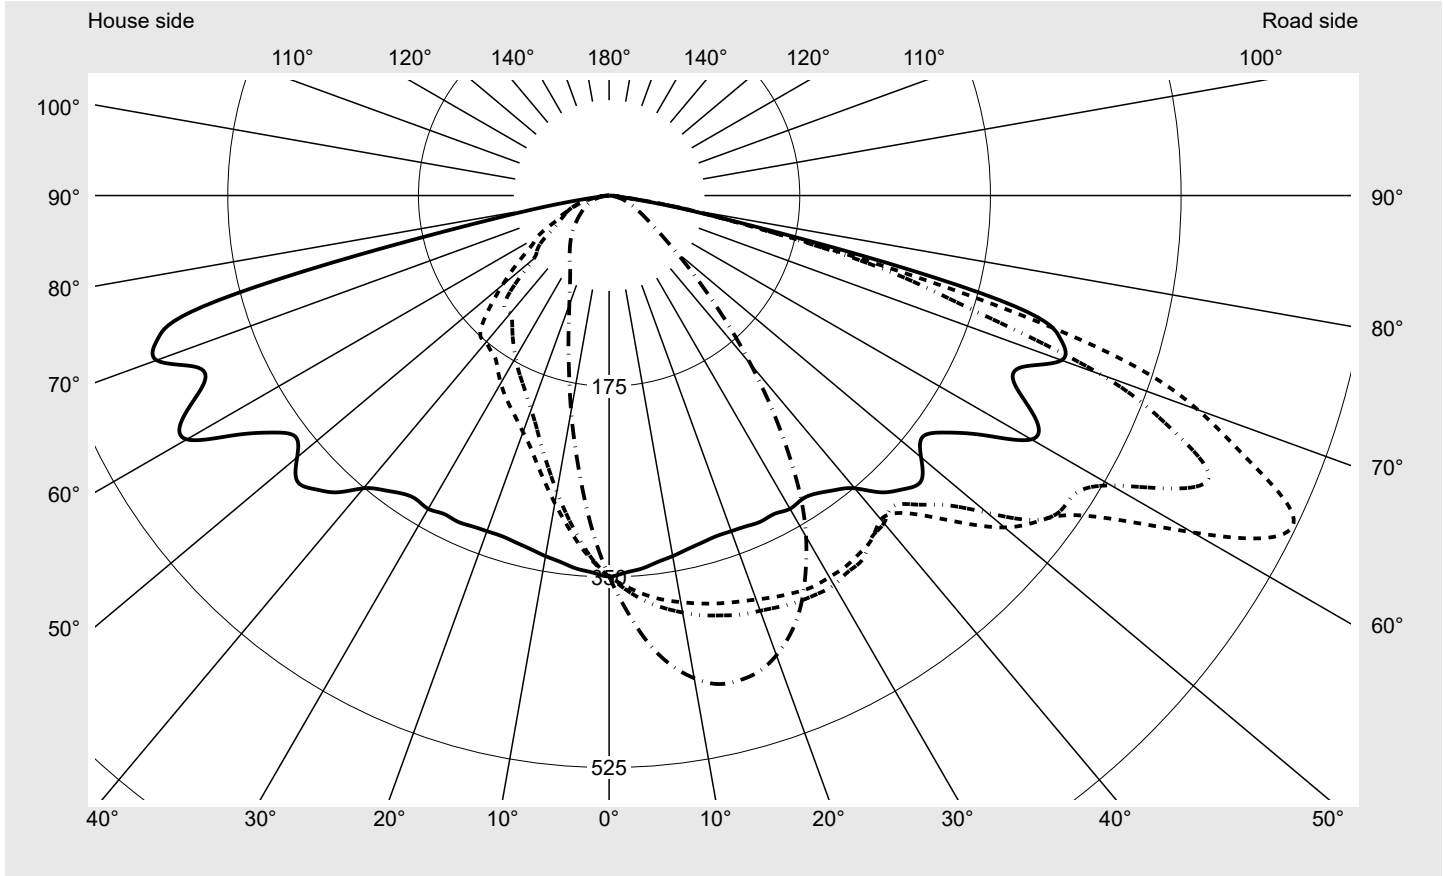

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	625.9
Imax 80°	83.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
---	--	------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

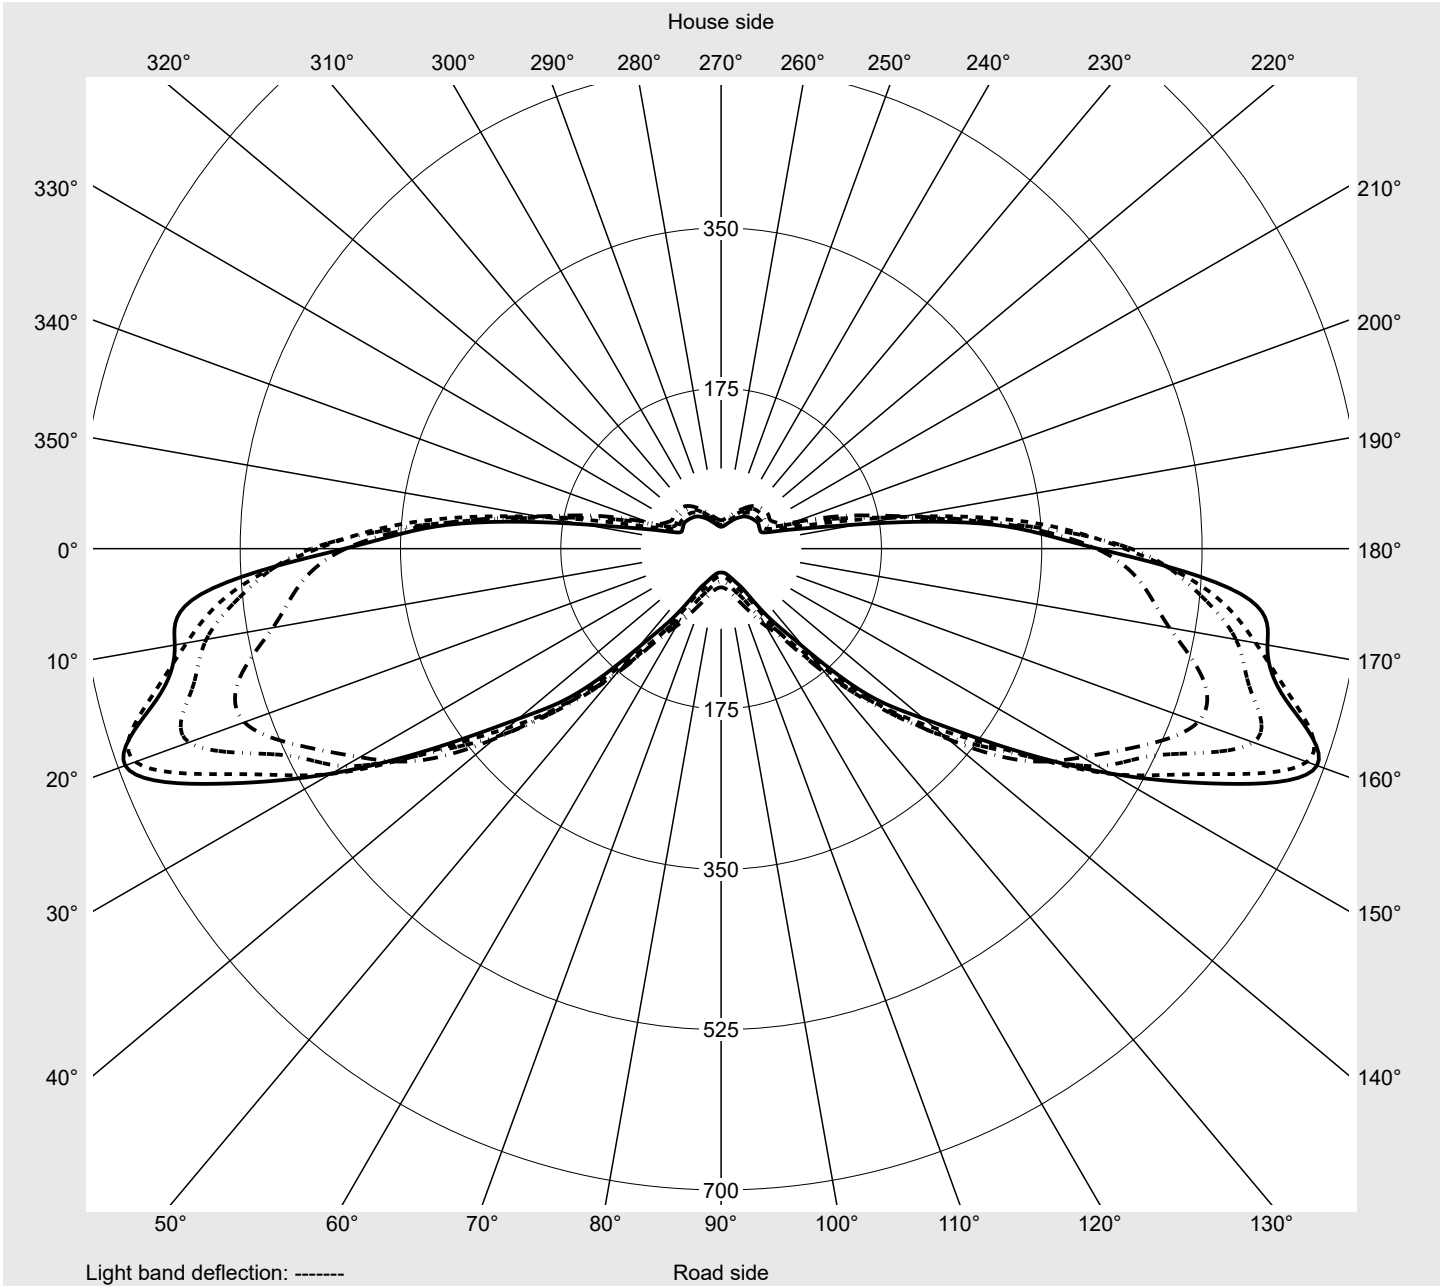

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	346.4	349.6	352.5	355.6	359.1	362.3	365.7	368.3	370.4	373.0	374.6	376.5	377.7
5,0°	343.7	349.5	355.4	361.4	367.3	373.2	379.3	384.2	389.4	393.9	397.5	401.2	403.7
7,5°	339.3	347.9	356.6	365.3	374.0	381.6	389.6	396.7	403.5	409.5	414.5	419.1	422.7
10,0°	336.1	347.6	358.5	368.8	378.9	388.6	397.8	406.7	414.0	421.1	427.2	432.1	436.4
12,5°	332.4	346.9	360.1	372.2	383.5	394.6	404.7	413.6	421.9	429.5	436.0	441.3	445.3
15,0°	329.7	346.1	361.1	375.1	387.5	398.9	409.1	418.6	426.9	434.3	439.8	445.0	448.5
17,5°	327.7	346.6	363.6	378.2	391.0	403.2	413.0	422.0	429.0	435.9	440.7	444.1	447.4
20,0°	327.8	348.5	366.7	382.0	394.6	405.6	414.5	422.7	429.0	434.0	437.7	440.1	442.2
22,5°	328.6	351.4	371.1	386.5	398.7	408.5	416.3	422.4	426.4	429.5	431.1	432.2	432.2
25,0°	330.0	353.9	374.6	390.4	402.2	411.2	417.2	421.5	422.5	422.4	421.0	419.7	417.9
27,5°	329.2	355.3	376.7	393.2	404.8	412.6	417.4	418.9	416.6	412.7	408.4	403.2	398.9
30,0°	332.0	357.6	377.2	392.6	404.4	412.7	415.4	414.5	410.0	402.0	393.4	384.1	376.1
32,5°	330.3	355.7	377.8	395.1	403.8	409.0	411.6	407.9	400.0	388.7	376.1	362.7	350.9
35,0°	333.5	360.4	379.2	389.4	400.8	406.6	403.3	397.8	387.0	372.6	356.3	339.2	323.1
37,5°	340.7	359.0	375.7	391.6	396.7	395.7	397.0	383.6	370.6	353.8	334.5	314.1	294.9
40,0°	350.8	370.9	384.9	388.1	388.2	392.5	380.4	371.0	349.7	331.8	310.7	288.4	266.5
42,5°	369.4	382.5	392.4	395.9	395.2	386.4	375.9	352.4	330.3	306.0	284.3	261.6	238.7
45,0°	381.3	398.3	412.4	414.5	416.8	401.2	377.6	347.0	317.0	285.5	257.2	233.4	210.0
47,5°	388.2	413.4	432.8	440.7	445.8	420.7	394.8	353.5	305.8	272.4	237.0	205.3	183.3
50,0°	373.8	408.9	441.6	467.0	473.9	452.9	419.2	363.7	305.3	257.9	216.6	184.5	157.1
52,5°	363.2	400.3	450.6	489.7	492.6	489.2	445.0	382.0	306.8	245.3	196.9	157.3	132.9
55,0°	379.3	415.1	461.7	514.1	511.6	505.2	458.8	398.4	321.4	242.5	179.1	137.3	111.7
57,5°	409.8	462.5	496.9	543.9	553.9	508.2	455.3	403.4	323.0	240.0	177.8	122.2	97.4
60,0°	447.6	519.5	570.7	598.5	618.2	532.1	474.8	389.0	318.7	246.0	178.2	113.8	87.8
62,5°	440.6	534.6	592.5	647.7	680.4	582.3	491.8	384.6	304.7	237.6	160.7	112.9	67.2
65,0°	411.0	569.8	605.6	638.3	692.3	607.3	490.8	377.8	288.9	224.2	142.0	93.7	56.6
67,5°	410.9	569.1	586.8	628.0	635.6	557.8	440.5	356.7	283.8	204.7	125.7	67.7	43.7
70,0°	442.0	555.6	565.8	625.9	575.2	480.6	332.4	279.2	238.2	183.8	113.9	57.6	34.9
72,5°	433.7	537.3	588.0	558.6	482.4	351.9	212.6	171.4	170.7	153.5	102.6	45.2	26.7
75,0°	371.4	397.9	481.8	383.0	304.1	260.7	173.2	132.3	98.5	83.5	58.2	32.8	18.6
77,5°	168.9	238.4	205.4	158.3	144.5	144.1	120.6	97.3	71.0	56.5	28.1	20.4	13.6
80,0°	63.8	83.0	54.2	76.5	72.1	71.7	61.2	43.7	28.6	19.3	16.8	14.2	9.8
82,5°	13.4	13.1	15.5	22.1	20.5	17.2	15.0	12.9	10.3	8.6	7.7	7.0	6.2
85,0°	7.9	8.1	8.4	8.4	8.1	7.7	7.0	6.4	5.8	5.3	4.7	4.0	3.3
87,5°	4.1	4.2	4.4	4.2	4.1	4.0	3.6	3.3	3.0	2.8	2.4	1.9	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	378.5	379.5	380.4	381.6	382.0	382.2	343.5	340.8	338.4	336.3	335.0	333.4	330.8
5,0°	405.6	407.4	409.2	411.0	411.9	412.1	337.1	331.3	325.5	320.7	316.1	311.3	306.5
7,5°	426.4	428.9	431.5	433.3	434.7	434.5	330.2	320.5	311.6	303.5	296.0	288.5	281.2
10,0°	439.9	443.4	446.1	448.5	449.8	449.8	323.3	310.6	298.5	286.8	276.1	266.4	256.6
12,5°	448.6	452.5	455.2	457.1	458.7	459.2	316.4	300.7	285.1	270.4	256.6	244.2	231.6
15,0°	451.7	455.3	457.5	459.5	461.0	460.7	311.3	292.0	272.7	255.2	239.0	224.0	209.9
17,5°	450.3	452.8	454.8	456.7	457.1	457.9	306.5	284.1	262.2	241.4	222.3	205.1	189.3
20,0°	444.1	445.8	446.9	448.4	448.5	449.0	304.4	279.0	254.2	231.0	209.2	189.9	172.7
22,5°	432.7	432.5	433.5	434.7	434.4	435.2	302.9	275.4	248.1	222.0	198.2	176.9	158.3
25,0°	416.7	415.4	414.7	415.6	415.7	416.0	301.7	271.7	242.5	214.3	188.8	166.2	147.0
27,5°	394.7	392.9	391.0	391.0	390.6	390.5	299.3	267.4	236.6	206.9	180.4	156.7	137.0
30,0°	370.0	365.9	363.8	362.4	361.8	361.5	298.6	261.6	228.6	198.8	171.7	148.3	128.8
32,5°	341.3	335.2	331.9	329.8	327.5	326.9	295.4	254.6	220.6	190.1	163.1	140.1	121.1
35,0°	310.0	301.2	295.1	291.2	287.1	285.5	296.0	252.1	215.2	182.1	154.6	131.7	113.8
37,5°	279.0	266.9	258.3	251.9	246.0	243.8	303.4	259.2	214.6	178.8	146.2	123.6	107.4
40,0°	247.7	232.6	220.9	211.8	205.0	202.3	303.1	260.0	210.1	176.1	141.2	119.5	101.2
42,5°	218.0	200.1	185.7	174.6	167.0	163.9	311.3	266.6	211.9	174.8	141.3	110.8	96.1
45,0°	188.3	168.7	153.2	140.2	132.3	129.3	320.6	267.8	211.5	163.2	132.8	99.0	91.1
47,5°	161.2	142.1	125.7	112.4	104.3	101.6	313.5	249.2	197.2	145.5	110.9	92.7	85.6
50,0°	136.0	117.3	101.4	89.0	81.6	79.2	299.9	224.1	169.8	127.8	90.3	84.7	80.5
52,5°	114.2	96.1	81.3	70.5	64.7	62.9	283.5	206.5	150.4	111.3	83.4	77.6	75.0
55,0°	94.4	78.5	65.6	56.9	52.5	51.1	285.4	201.3	140.7	95.7	77.0	70.0	69.0
57,5°	77.4	63.2	53.1	46.6	43.4	42.2	309.7	203.3	138.1	83.2	67.0	62.1	63.3
60,0°	63.7	51.8	44.0	39.0	36.5	35.6	312.6	194.5	125.2	76.3	57.6	56.2	57.5
62,5°	51.3	42.4	36.4	32.5	30.9	30.3	335.4	199.0	100.5	63.9	52.2	52.2	52.9
65,0°	42.1	34.9	30.3	27.5	26.3	26.1	299.1	153.0	81.3	51.9	47.0	47.9	48.9
67,5°	34.0	28.3	24.9	23.1	22.2	22.0	270.2	117.3	69.3	46.7	43.4	43.6	43.7
70,0°	27.2	22.9	20.3	19.2	18.5	18.3	266.4	101.7	64.7	39.1	39.6	39.3	38.9
72,5°	20.3	18.0	16.4	15.6	15.1	15.0	222.7	100.6	48.5	33.1	35.0	35.1	34.5
75,0°	15.6	14.0	12.9	12.2	11.9	11.9	204.4	96.9	30.3	28.2	30.1	30.5	30.0
77,5°	11.9	10.4	9.8	9.0	8.6	8.4	131.9	42.0	20.5	21.9	24.3	25.2	25.6
80,0°	8.4	7.4	6.5	6.1	5.6	5.5	55.2	23.9	14.0	15.6	17.5	18.8	19.4
82,5°	5.5	4.6	4.0	3.6	3.4	3.2	11.0	9.2	8.7	9.3	10.2	11.4	12.6
85,0°	2.8	2.4	1.9	1.8	1.6	1.5	7.1	6.2	5.5	4.9	4.4	4.0	3.8
87,5°	1.2	0.9	0.8	0.6	0.5	0.5	3.9	3.5	3.1	2.9	2.6	2.4	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	0.5	0.5
2,5°	328.8	326.6	324.6	322.7	320.6	319.1	317.2	316.1	314.6	313.6	313.3	4.2	4.7
5,0°	301.9	297.4	293.1	289.4	285.6	282.2	279.6	277.4	275.4	274.0	273.4	8.2	12.9
7,5°	274.3	267.7	261.9	256.5	251.6	247.2	243.4	240.4	237.7	235.8	235.4	12.1	25.0
10,0°	247.0	238.5	231.2	224.7	219.1	214.1	209.7	206.2	203.2	201.2	200.9	15.7	40.7
12,5°	220.6	210.6	202.0	194.5	188.2	182.9	178.6	174.7	171.8	170.0	169.3	19.1	59.8
15,0°	197.1	185.7	176.4	168.6	162.0	156.7	152.5	148.9	146.3	144.8	144.3	22.2	81.9
17,5°	175.6	163.5	153.7	145.8	139.3	134.3	130.2	127.0	124.6	123.2	122.9	25.0	107.0
20,0°	158.0	145.7	135.8	127.9	122.0	117.0	113.4	110.5	108.5	107.3	106.8	27.7	134.7
22,5°	142.9	130.6	120.7	113.3	107.6	103.2	99.8	97.4	95.5	94.5	94.2	30.2	164.9
25,0°	131.2	118.8	109.5	102.2	97.0	93.1	90.0	87.8	86.1	85.0	84.7	32.4	197.3
27,5°	121.4	109.5	100.1	93.5	88.6	85.1	82.2	80.2	78.7	77.8	77.4	34.3	231.5
30,0°	113.4	101.5	93.2	87.3	82.7	79.3	76.8	74.6	73.1	72.4	72.0	35.8	267.3
32,5°	106.3	95.4	87.6	82.2	78.2	74.9	72.1	70.0	68.4	67.6	67.6	36.9	304.2
35,0°	100.3	90.3	83.4	78.4	74.5	71.0	68.3	65.8	64.1	63.1	63.1	37.6	341.9
37,5°	95.5	86.9	80.6	75.8	71.7	68.0	64.8	62.3	60.4	59.2	59.0	38.1	380.0
40,0°	91.6	84.2	78.6	73.7	69.3	65.2	61.7	58.8	56.8	55.6	55.2	38.3	418.3
42,5°	87.8	82.0	77.2	72.1	67.1	62.8	58.8	55.6	53.4	52.1	51.6	38.6	456.9
45,0°	84.7	80.0	75.6	70.3	65.2	60.2	55.7	52.4	50.0	48.7	48.1	39.1	495.9
47,5°	81.4	77.8	73.7	68.4	63.0	57.5	52.6	49.2	46.7	45.1	44.4	39.4	535.4
50,0°	77.9	74.8	71.1	66.1	60.5	54.8	49.7	45.7	43.0	41.3	40.7	39.5	574.8
52,5°	73.9	71.9	68.0	63.1	57.8	52.0	46.8	42.8	39.8	37.9	37.2	39.7	614.5
55,0°	68.9	67.8	64.6	59.9	54.8	48.9	44.0	39.9	37.0	35.0	34.1	40.5	655.0
57,5°	63.4	62.6	60.5	56.5	51.2	45.9	41.2	37.1	34.1	31.9	31.1	41.9	696.9
60,0°	58.0	57.4	56.2	52.7	47.5	42.6	38.2	34.5	31.4	29.3	28.6	44.1	741.0
62,5°	52.4	52.0	50.9	48.0	43.6	39.2	35.1	31.5	28.8	26.8	26.1	45.4	786.4
65,0°	48.1	46.8	45.2	42.9	39.3	35.9	32.0	28.9	26.3	24.6	23.9	44.7	831.2
67,5°	43.3	41.9	39.9	37.0	34.7	32.1	29.2	26.5	24.0	22.3	21.7	42.4	873.6
70,0°	38.3	36.8	35.1	32.0	30.0	28.4	26.5	24.0	21.7	20.1	19.5	39.3	912.9
72,5°	33.5	32.5	30.4	27.7	26.0	24.8	23.3	21.2	19.1	17.7	17.2	34.1	947.1
75,0°	29.2	28.2	26.5	24.1	22.3	20.8	19.7	18.0	16.2	14.8	14.5	26.1	973.2
77,5°	25.1	24.6	22.6	20.4	18.7	17.2	15.8	14.8	13.3	11.9	11.4	14.9	988.0
80,0°	19.5	20.1	18.9	16.7	15.2	13.7	12.4	11.1	9.8	8.6	8.2	7.2	995.3
82,5°	12.6	12.9	13.0	12.5	11.6	10.3	8.9	7.5	6.1	5.3	5.0	2.8	998.1
85,0°	3.9	4.4	5.0	5.6	5.6	5.5	4.8	3.7	2.9	2.4	2.2	1.3	999.4
87,5°	1.9	1.7	1.4	1.2	0.9	0.8	0.8	0.7	0.3	0.2	0.2	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_82
---	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1940	12.6	12.9	12.8
95	241	252	1841	12.0	12.3	12.2
90	229	250	1749	11.4	11.7	11.6
85	216	248	1650	10.8	11.0	10.9
80	203	246	1550	10.1	10.4	10.2
75	190	243	1451	9.6	9.8	9.7
70	178	241	1360	9.0	9.2	9.1
65	165	238	1260	8.4	8.6	8.5
60	152	235	1161	7.8	8.0	7.9
55	140	232	1069	7.3	7.5	7.4
50	127	229	970	6.8	6.9	6.8
45	114	225	871	6.2	6.3	6.2
40	102	221	779	5.7	5.8	5.8
35	89	216	680	5.1	5.2	5.2
30	76	210	580	4.6	4.7	4.6
25	63	203	481	4.1	4.1	4.1
20	51	195	390	3.3	3.4	3.4
16	40	186	306	2.7	2.8	2.8