

## Photometric test report

**Family**  
Streetlight 21 mini easy LED

**Order number: 5XE6E43A08GB**  
**EAN: 4058352730584**

**LP number**  
**59077\_802**



<b>Version</b>	post-top or side-entry mounting
<b>Optic</b>	asymmetric, wide distribution (STW1.0a)
<b>Cover</b>	toughened safety glass
<b>Lamps</b>	LED 4000 K   CRI ≥ 70
<b>Controlgear</b>	ECG DIM
<b>Rated values</b>	Net luminous flux = 6180 lm Power consumption = 40.4 W Luminous efficacy = 153 lm/W

**serial**  
**documentation**  
18.07.2022

**sitEco**

**Luminous intensity in cd/klm**


**C180-0**

**C210-30**

**C215-35**

**C270-90**

**Imax: 809 cd/klm**

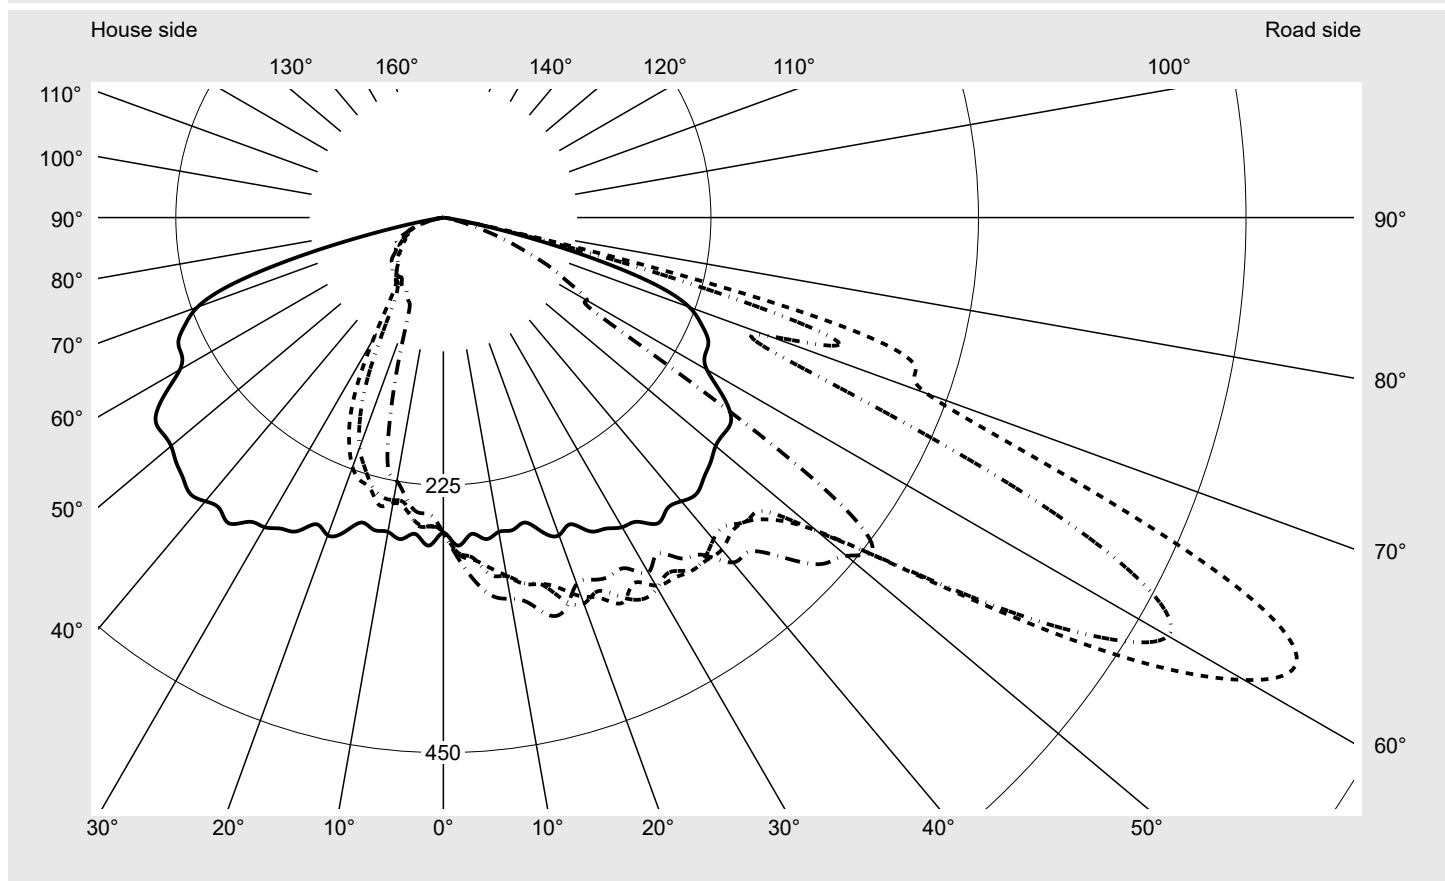

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	498.7
Imax 80°	32.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
---	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

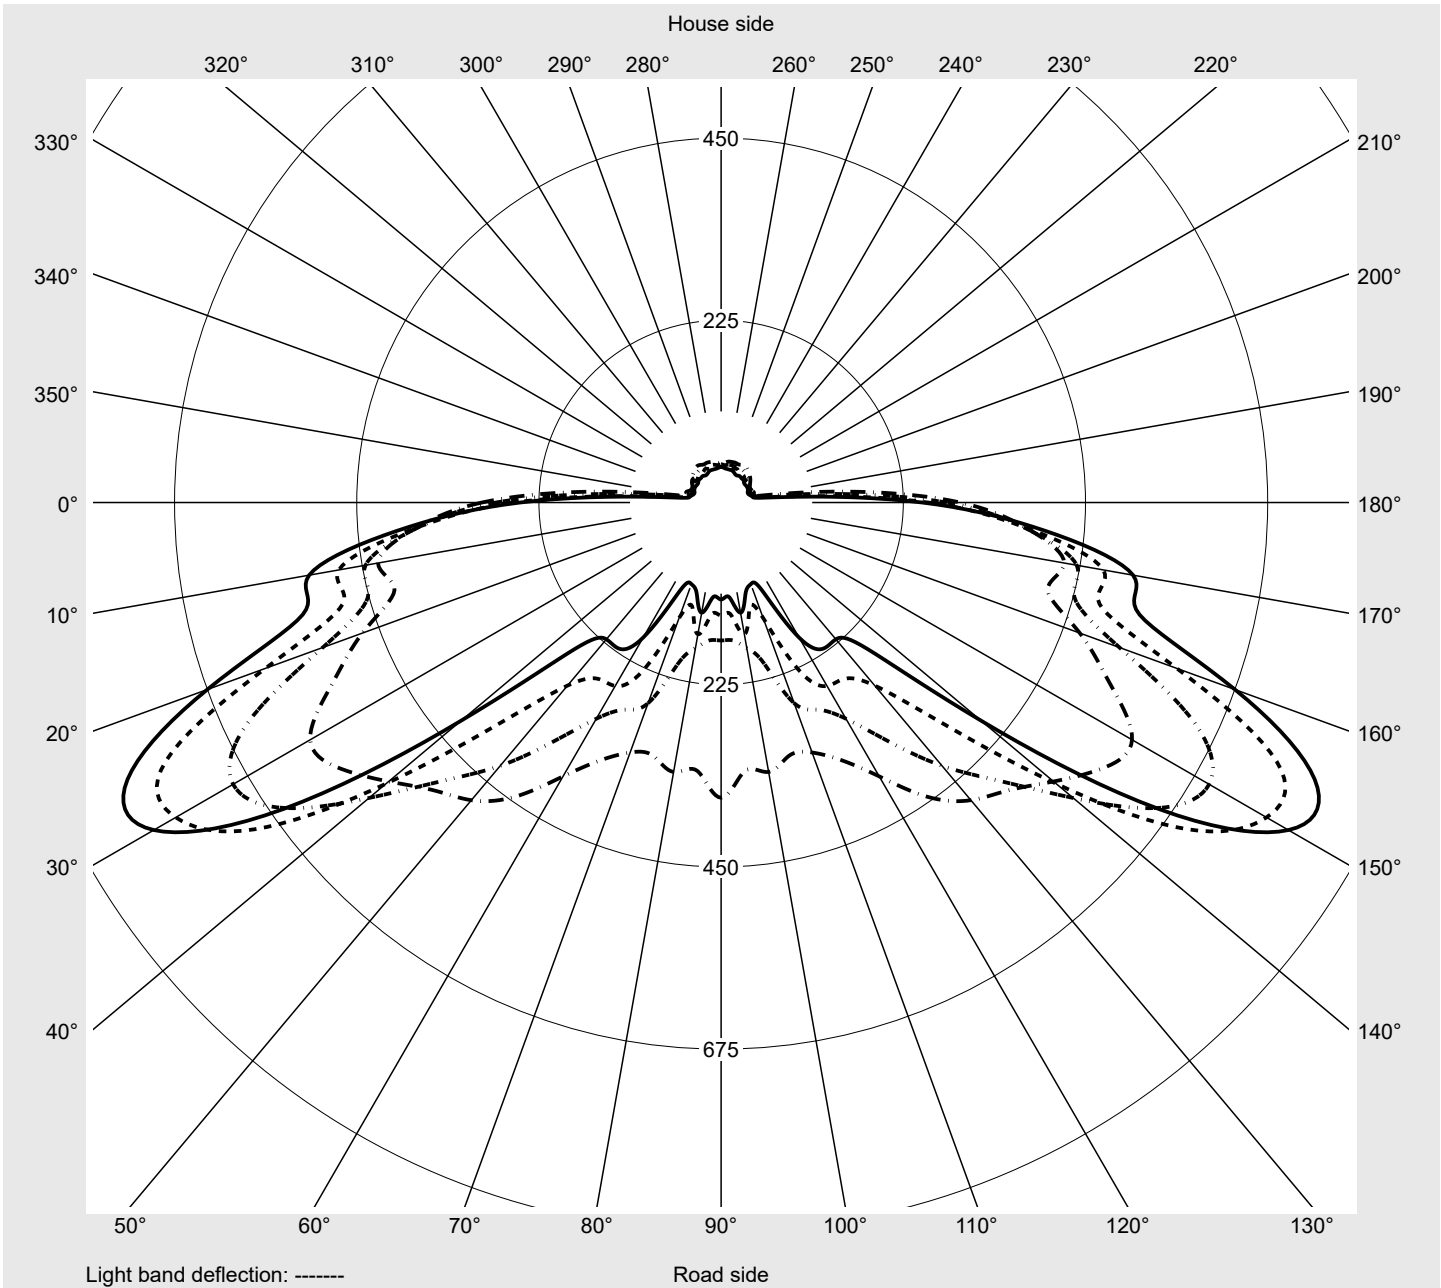

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	276.1	278.2	279.9	280.7	282.6	280.9	282.9	282.1	283.9	285.0	286.7	288.0	286.1
5,0°	267.2	269.0	274.7	278.5	279.8	286.4	288.9	287.4	290.8	292.6	294.2	300.0	298.6
7,5°	272.7	275.9	280.1	284.4	288.5	292.4	296.9	303.0	303.7	307.0	310.0	310.1	313.3
10,0°	268.4	272.2	277.4	291.4	300.9	306.8	305.9	306.1	302.0	308.4	313.7	316.2	320.5
12,5°	269.1	273.9	287.4	294.7	304.6	314.3	315.6	314.8	322.9	327.5	331.4	330.3	330.5
15,0°	265.5	276.8	296.7	300.8	305.0	315.9	318.9	319.5	329.6	338.0	337.2	339.7	342.1
17,5°	277.4	287.6	299.4	305.4	315.7	326.6	326.9	337.2	336.9	335.5	339.7	341.4	338.5
20,0°	284.3	295.0	304.2	313.5	321.0	328.4	338.9	345.5	343.3	344.8	347.8	341.7	334.4
22,5°	279.1	294.0	312.1	323.0	327.7	341.0	346.5	340.0	341.6	352.4	351.9	343.1	331.1
25,0°	291.0	303.1	317.1	327.0	339.5	348.9	357.1	351.7	350.1	347.4	339.5	333.6	333.4
27,5°	295.0	309.9	321.7	338.0	351.4	356.8	346.6	361.8	356.7	344.1	331.2	337.6	339.9
30,0°	300.7	317.1	328.5	349.8	355.9	355.9	357.4	359.7	352.9	344.8	333.1	337.4	338.9
32,5°	303.3	318.9	336.3	353.9	359.5	349.5	359.8	353.7	348.0	346.4	340.3	346.7	346.0
35,0°	314.0	326.8	340.1	355.5	360.5	357.7	363.1	362.1	346.9	343.3	345.1	341.2	346.2
37,5°	308.9	327.9	347.5	353.8	357.0	355.0	363.3	360.9	349.1	347.9	346.4	345.8	346.0
40,0°	311.4	332.1	344.0	358.4	357.1	363.3	364.4	353.3	357.7	355.2	353.1	353.4	356.3
42,5°	315.1	342.3	354.5	357.4	364.8	358.6	358.8	351.6	354.4	362.5	363.5	361.8	376.7
45,0°	309.7	352.0	364.3	364.3	367.8	375.0	361.3	360.8	367.0	373.0	384.1	397.1	402.7
47,5°	304.8	361.9	365.7	366.2	379.0	381.6	376.2	365.3	379.3	404.4	419.2	437.2	429.1
50,0°	298.9	376.3	386.3	389.3	397.8	415.1	409.9	410.7	417.6	449.6	467.2	465.5	448.8
52,5°	297.8	384.5	408.5	405.9	426.8	460.3	481.7	479.2	484.8	487.2	491.5	476.7	441.4
55,0°	295.5	381.4	430.2	417.6	471.4	530.1	586.0	573.2	535.9	502.5	479.9	443.5	390.5
57,5°	278.4	380.3	445.9	451.7	523.6	645.7	695.9	657.7	567.6	486.1	424.4	359.9	308.3
60,0°	255.9	384.0	479.3	483.8	599.0	757.2	777.7	703.6	540.3	384.0	295.1	265.7	261.6
62,5°	248.4	402.0	516.6	535.0	675.3	808.8	809.0	659.9	419.1	256.1	220.5	220.2	192.6
65,0°	245.9	422.0	553.6	573.4	711.3	776.7	738.3	510.2	243.5	208.7	192.4	191.3	104.6
67,5°	235.0	425.3	575.2	564.4	621.8	656.3	565.5	314.5	192.3	176.6	153.1	147.2	65.3
70,0°	220.0	417.0	498.7	490.7	467.4	475.7	432.4	290.7	186.4	147.5	119.0	82.6	48.3
72,5°	186.1	339.1	400.0	304.5	275.2	335.3	416.1	348.4	176.7	109.9	75.5	56.3	39.4
75,0°	123.0	169.2	172.4	105.2	89.8	211.1	330.5	216.4	77.4	39.2	49.9	41.1	30.5
77,5°	56.5	71.0	62.1	33.2	30.7	82.6	105.1	73.0	43.5	25.3	37.7	26.1	20.2
80,0°	17.1	18.7	17.1	12.0	10.0	32.8	16.7	12.3	11.9	13.6	24.3	14.2	12.9
82,5°	2.8	2.6	2.8	2.7	4.2	12.7	4.3	4.9	3.6	2.7	7.1	7.5	9.0
85,0°	0.6	1.0	0.8	0.7	0.9	0.6	1.1	1.6	1.2	1.0	1.0	1.0	0.9
87,5°	0.2	0.1	0.2	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	287.5	287.6	287.1	287.4	287.0	287.0	273.3	268.1	264.9	264.2	262.9	260.1	259.7
5,0°	298.8	299.6	303.6	304.8	306.2	307.1	263.9	264.0	263.7	260.2	262.6	257.7	259.0
7,5°	311.1	312.7	314.2	315.4	319.9	321.2	264.6	260.9	257.4	253.9	248.6	246.6	243.3
10,0°	322.2	321.1	324.7	324.1	330.8	325.5	261.4	256.1	251.1	248.3	244.7	244.0	241.3
12,5°	332.1	335.3	335.1	332.5	329.2	332.0	262.3	260.1	252.5	246.3	242.6	247.9	240.3
15,0°	337.6	337.3	338.6	345.5	346.4	346.4	261.0	256.5	253.2	248.3	245.2	236.4	233.1
17,5°	341.6	341.9	341.5	339.9	341.6	343.8	270.2	262.3	253.8	247.9	241.6	232.0	220.2
20,0°	335.0	333.0	331.7	327.6	328.6	327.9	267.8	260.8	255.7	239.3	232.0	223.3	206.1
22,5°	329.0	328.2	327.2	332.2	325.7	329.6	271.4	267.7	246.7	240.9	224.1	206.9	183.3
25,0°	334.2	338.9	333.4	328.8	331.6	332.3	273.9	267.1	247.9	230.6	210.1	185.4	153.1
27,5°	345.0	340.9	338.0	336.9	330.6	332.5	281.1	265.5	244.5	212.3	189.3	154.5	114.5
30,0°	347.4	348.6	347.5	338.6	338.7	344.5	287.4	263.9	231.2	198.3	160.4	116.8	84.4
32,5°	348.4	347.2	343.8	343.5	341.8	335.2	290.9	256.1	220.6	179.3	126.7	86.3	72.1
35,0°	347.0	345.2	346.6	347.5	342.5	350.1	287.0	243.6	204.1	146.9	96.2	70.3	66.8
37,5°	350.1	351.8	356.0	359.3	353.9	357.4	278.7	226.5	179.7	108.7	69.8	65.7	65.1
40,0°	361.0	366.3	369.3	373.6	367.6	378.6	271.5	211.0	146.0	80.9	62.4	61.5	61.5
42,5°	385.5	380.9	382.4	379.9	385.9	381.1	253.2	192.1	110.3	60.5	58.0	57.7	57.7
45,0°	410.8	397.6	391.9	399.7	411.0	404.2	243.1	159.0	76.9	55.3	55.2	53.6	54.0
47,5°	433.6	414.0	411.4	415.7	420.3	431.3	227.6	126.7	55.1	50.4	51.7	51.7	52.1
50,0°	445.6	425.7	419.8	449.5	443.7	442.5	210.7	88.3	49.0	47.6	47.1	49.3	47.6
52,5°	416.0	395.0	398.9	443.8	448.1	454.9	180.9	59.1	45.7	45.0	43.8	45.3	45.8
55,0°	351.0	328.5	323.8	337.9	333.0	364.6	154.6	48.8	43.8	42.1	39.9	41.0	43.9
57,5°	282.3	263.7	206.2	182.5	171.1	170.4	121.8	44.9	41.6	41.3	39.9	40.0	43.9
60,0°	229.7	151.7	135.7	165.2	139.3	139.5	86.6	41.6	37.8	38.2	38.7	36.9	40.7
62,5°	120.0	107.2	116.5	138.1	117.6	119.8	77.0	39.6	36.3	35.0	36.5	37.2	37.1
65,0°	83.4	91.6	95.7	104.6	97.6	100.3	69.3	36.7	32.8	31.9	34.4	37.0	32.8
67,5°	67.6	73.1	74.5	77.1	78.6	76.2	54.0	28.7	29.8	27.7	32.7	34.8	32.1
70,0°	52.0	55.8	56.0	55.7	56.2	56.3	41.4	23.6	24.9	23.4	27.3	28.8	27.1
72,5°	39.0	39.0	37.7	39.2	37.6	36.6	39.4	19.2	19.3	19.8	21.9	22.2	21.5
75,0°	24.8	24.3	23.5	23.2	21.8	20.8	33.9	14.3	14.8	15.1	17.1	14.6	15.3
77,5°	14.2	13.2	12.7	11.4	11.4	9.5	22.2	10.4	8.7	9.2	11.9	11.0	10.9
80,0°	7.8	5.8	5.4	4.1	4.0	2.8	9.0	5.5	5.3	4.7	5.5	5.6	6.8
82,5°	3.8	1.6	1.4	1.0	1.4	0.9	2.5	2.3	2.2	2.3	2.5	2.8	3.4
85,0°	0.6	0.4	0.3	0.3	0.3	0.4	0.8	0.7	0.8	0.8	0.7	0.9	1.0
87,5°	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	0.4	0.4
2,5°	256.9	256.0	255.6	256.1	254.6	252.5	250.9	249.4	248.9	249.4	250.4	3.2	3.6
5,0°	255.7	253.9	254.1	252.3	249.0	249.7	248.6	248.0	246.8	248.4	248.8	6.5	10.2
7,5°	240.3	241.6	243.4	240.7	241.4	239.6	241.1	240.8	239.1	237.5	238.3	9.8	20.0
10,0°	240.0	236.3	237.0	232.8	230.3	226.3	227.2	227.7	229.3	228.1	225.1	13.0	33.0
12,5°	232.1	228.4	226.2	223.2	220.3	215.5	208.4	206.4	206.3	212.3	215.0	16.3	49.3
15,0°	228.7	218.0	206.6	202.2	200.2	193.2	184.1	176.9	174.8	172.2	172.4	19.2	68.5
17,5°	209.4	198.3	189.0	174.2	161.0	148.0	139.2	129.3	122.8	121.0	123.7	21.6	90.1
20,0°	192.2	169.1	150.1	131.9	115.1	104.2	97.2	89.9	88.2	86.4	85.0	23.5	113.6
22,5°	156.5	129.9	107.3	94.2	82.7	77.8	78.4	76.9	75.2	76.8	76.1	25.4	139.0
25,0°	117.5	93.4	80.0	74.6	74.6	73.9	73.1	74.0	72.0	74.0	72.3	27.6	166.6
27,5°	87.2	75.8	71.2	72.6	73.4	71.9	71.0	71.6	70.4	71.1	67.8	29.8	196.4
30,0°	73.6	70.2	72.9	71.5	70.4	71.0	69.8	70.1	68.1	67.3	68.0	32.0	228.4
32,5°	67.8	68.1	67.7	70.5	70.7	68.2	67.0	65.7	64.1	63.6	65.2	33.9	262.4
35,0°	66.4	67.3	66.7	66.1	65.8	64.8	64.9	64.1	64.6	62.1	61.4	35.8	298.2
37,5°	67.0	67.1	66.4	64.8	64.1	62.0	62.1	63.5	62.3	64.1	62.6	37.7	335.9
40,0°	65.2	69.2	62.8	60.8	59.4	59.4	62.3	62.4	60.3	60.0	60.4	39.8	375.7
42,5°	64.4	66.3	68.6	56.9	57.5	58.5	59.4	60.7	57.9	58.0	62.3	42.0	417.7
45,0°	61.0	62.0	77.2	58.2	58.6	59.2	60.0	59.8	60.6	60.1	60.3	44.9	462.5
47,5°	53.1	53.8	65.9	58.5	59.2	58.8	59.9	60.0	59.8	59.0	57.8	47.8	510.3
50,0°	49.0	52.4	58.1	59.5	60.2	57.5	58.4	56.2	56.5	55.8	56.8	51.7	562.1
52,5°	47.6	51.8	55.7	54.3	55.8	54.5	53.9	54.8	53.8	53.5	53.4	54.9	616.9
55,0°	47.0	49.2	51.3	53.6	53.4	51.8	52.2	51.8	51.3	49.3	48.8	55.2	672.1
57,5°	45.4	44.7	46.5	47.9	48.4	48.5	47.8	47.7	47.4	46.4	47.2	53.2	725.3
60,0°	41.2	41.2	43.3	43.3	43.7	45.9	44.1	44.4	44.6	44.1	43.7	51.8	777.1
62,5°	37.1	39.0	39.1	39.8	38.6	39.5	41.5	41.8	42.1	42.8	44.1	49.6	826.7
65,0°	33.4	34.7	37.0	36.8	35.8	36.8	38.8	37.6	40.4	42.1	41.9	46.0	872.7
67,5°	29.7	31.0	32.3	32.5	32.0	32.6	33.8	36.5	37.1	35.6	34.6	40.0	912.8
70,0°	25.9	28.0	28.5	28.5	28.1	28.2	29.6	31.2	31.7	30.2	29.9	33.5	946.3
72,5°	21.7	23.7	24.6	25.3	25.5	26.0	25.4	26.6	27.1	26.8	25.0	26.9	973.2
75,0°	17.0	18.4	21.4	20.6	20.1	20.9	20.3	21.1	22.0	20.0	20.2	15.6	988.8
77,5°	12.3	14.7	16.6	16.7	16.2	16.3	15.3	12.3	9.2	7.0	6.0	7.1	995.9
80,0°	7.5	8.6	11.2	12.9	13.0	11.5	9.3	6.4	3.8	1.9	1.2	2.8	998.7
82,5°	3.8	4.4	5.7	8.4	8.1	7.0	4.2	2.7	1.4	0.5	0.4	1.1	999.7
85,0°	1.4	1.4	1.6	1.6	1.8	1.5	0.8	0.5	0.4	0.1	0.1	0.2	1000.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	6180	40.4	41.1	40.8
95	94	5854	37.9	38.6	38.2
90	89	5577	35.9	36.6	36.2
85	83	5241	33.5	34.1	33.8
80	78	4957	31.5	32.0	31.8
75	72	4613	29.1	29.6	29.4
70	67	4320	27.2	27.6	27.4
65	62	4024	25.2	25.6	25.4
60	57	3724	23.3	23.6	23.5
55	52	3422	21.3	21.6	21.5
50	47	3115	19.4	19.7	19.5
45	42	2804	17.5	17.7	17.6
40	37	2489	15.5	15.8	15.6
35	32	2171	13.6	13.8	13.7
30	27	1848	11.8	11.9	11.9
25	22	1521	9.9	10.1	10.0
20	18	1256	8.4	8.5	8.4
15	13	923	6.6	6.7	6.6

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	6320	40.9	41.6	41.2
95	94	5982	38.5	39.2	38.8
90	89	5695	36.4	37.1	36.8
85	83	5348	34.0	34.5	34.2
80	78	5055	31.9	32.5	32.2
75	73	4760	30.0	30.4	30.2
70	67	4399	27.6	28.0	27.8
65	62	4096	25.6	25.9	25.8
60	57	3788	23.6	24.0	23.8
55	52	3479	21.6	21.9	21.8
50	47	3165	19.7	20.0	19.8
45	42	2847	17.7	17.9	17.8
40	37	2526	15.8	16.1	16.0
35	32	2202	13.8	14.1	14.0
30	27	1873	12.0	12.1	12.0
25	23	1608	10.4	10.6	10.5
20	18	1274	8.6	8.7	8.6
15	13	935	6.7	6.8	6.8

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	6260	40.6	41.4	41.0
95	94	5928	38.2	38.9	38.6
90	89	5646	36.1	36.9	36.5
85	83	5303	33.7	34.3	34.0
80	78	5015	31.7	32.3	32.0
75	73	4723	29.7	30.2	30.0
70	67	4366	27.4	27.8	27.6
65	62	4066	25.4	25.8	25.6
60	57	3762	23.4	23.8	23.6
55	52	3455	21.4	21.8	21.6
50	47	3145	19.5	19.8	19.6
45	42	2830	17.6	17.8	17.7
40	37	2511	15.6	15.9	15.8
35	32	2190	13.7	13.9	13.8
30	27	1863	11.9	12.0	12.0
24	22	1533	9.9	10.1	10.0
20	18	1267	8.5	8.6	8.6
15	13	930	6.6	6.7	6.6

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08GB</b> <b>EAN: 4058352730584</b>	<b>LP number</b> <b>59077_802</b>
---	--	--------------------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	6180.0	40.4
5.0	6320.0	40.9
15.0	6260.0	40.6