

## Photometric test report

Family  
DL® 50 mini LED

Order number: 5XA248C31F08ME  
EAN: 4058352802519

LP number  
59081\_1015



Version post-top or side-entry mounting  
Optic asymmetric, wide distribution (ST0.8a)  
Cover toughened safety glass  
Lamps LED 3000 K | CRI ≥ 70  
Controlgear ECG SITECO iQ  
Rated values  
Net luminous flux = 15660 lm  
Power consumption = 107.8 W  
Luminous efficacy = 145.3 lm/W

serial  
documentation  
03.04.2023

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 851 cd/klm

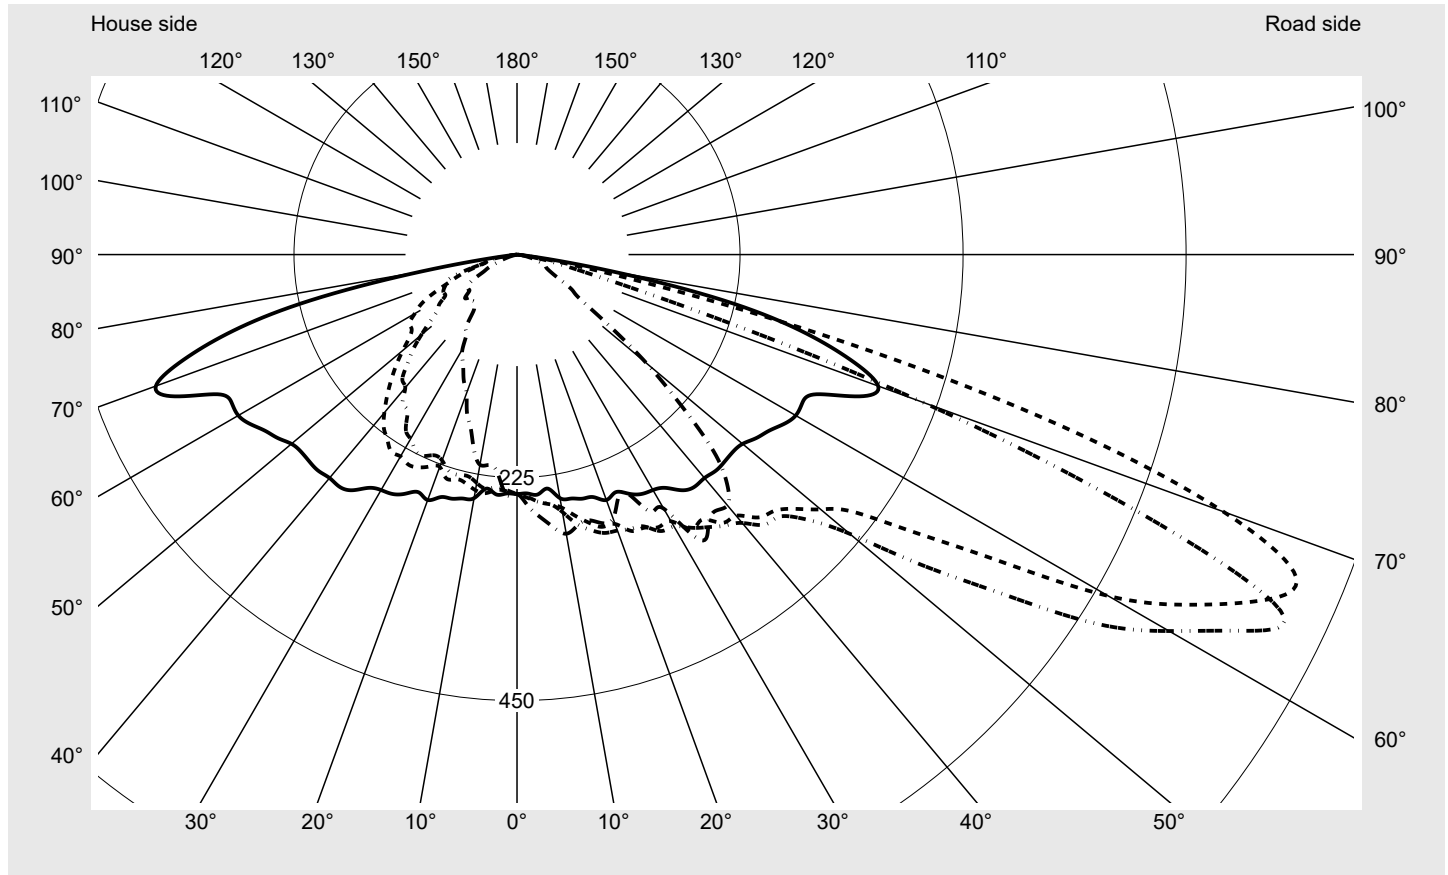

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	826.1
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> DL® 50 mini LED	<b>Order number: 5XA248C31F08ME</b> <b>EAN: 4058352802519</b>	<b>LP number</b> 59081_1015
----------------------------------	--	--------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

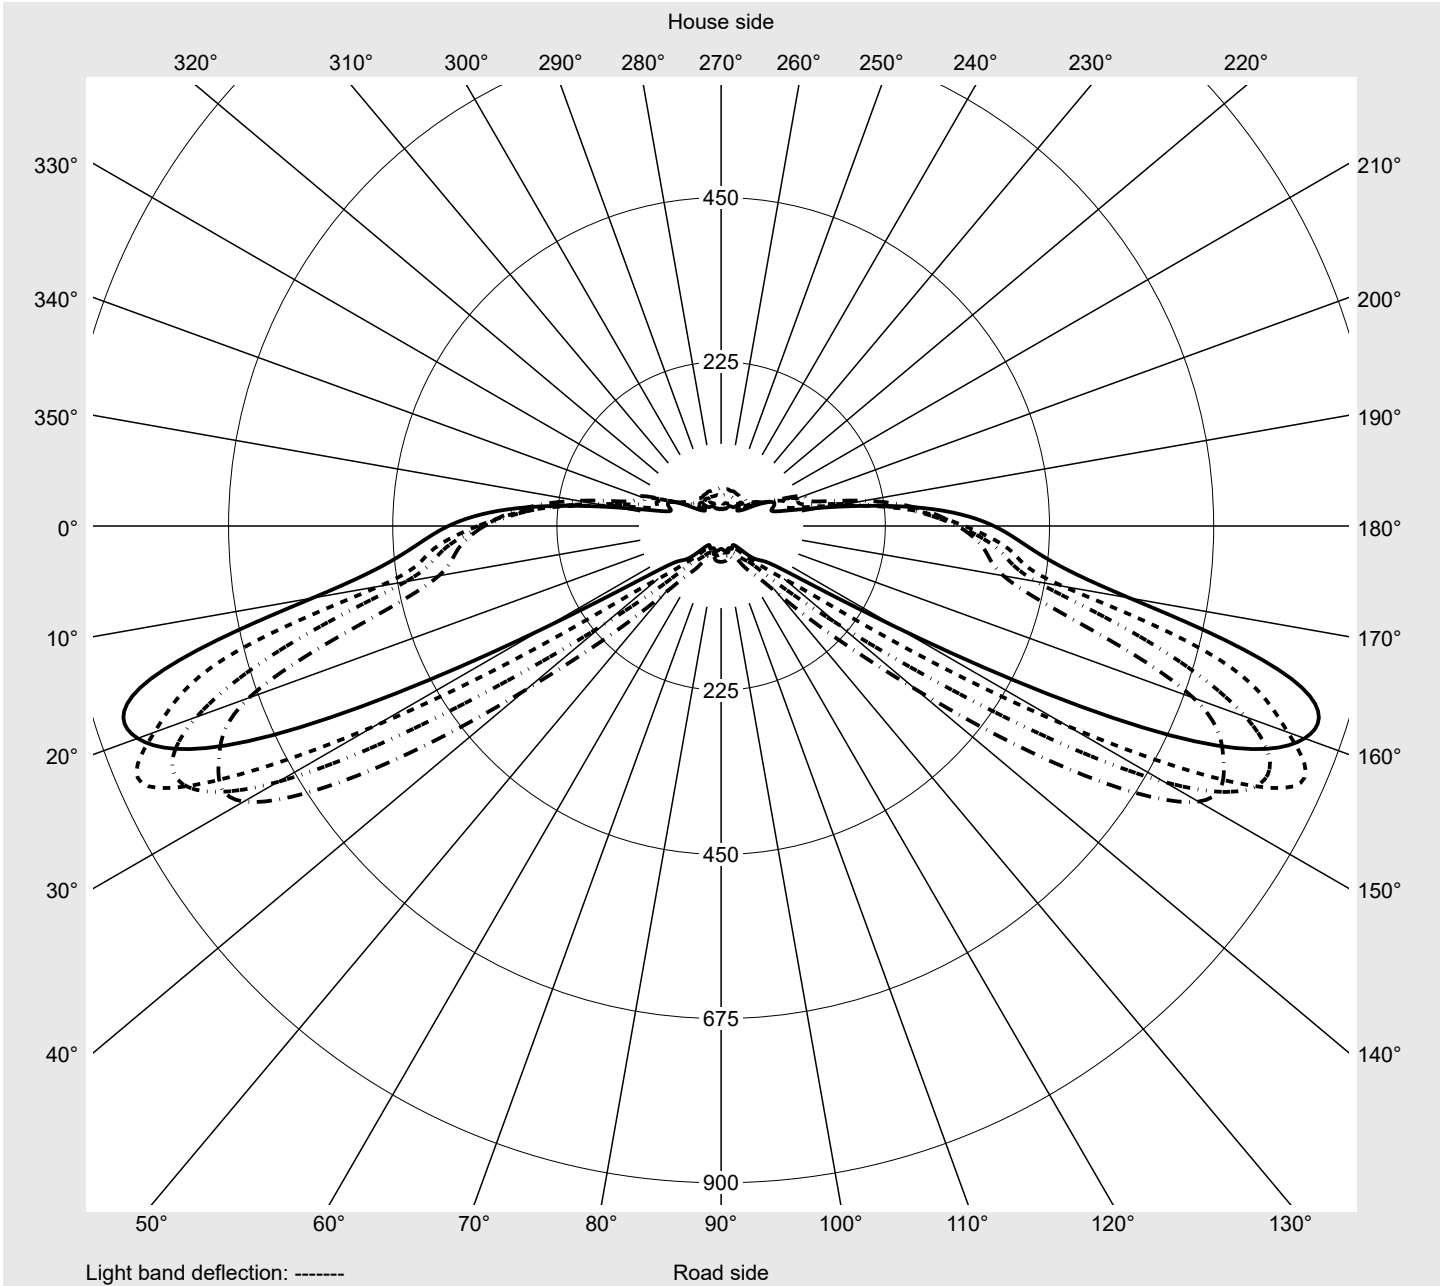

## Photometric test report

<b>Family</b> <b>DL® 50 mini LED</b>	<b>Order number: 5XA248C31F08ME</b> <b>EAN: 4058352802519</b>	<b>LP number</b> <b>59081_1015</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	241.2	242.0	242.3	244.6	244.8	245.6	247.5	249.2	247.9	248.6	249.4	249.4	252.1
5,0°	242.8	244.4	246.4	248.5	250.4	250.4	252.4	251.7	252.9	252.6	256.1	257.1	257.8
7,5°	238.1	244.7	246.4	249.3	254.1	253.8	256.3	259.1	262.2	263.1	264.0	270.2	274.3
10,0°	249.5	250.2	252.0	252.1	259.2	263.7	267.3	266.8	269.8	277.2	281.7	280.5	280.0
12,5°	252.1	255.9	263.4	267.0	269.7	278.2	283.8	288.0	292.2	295.4	292.5	284.3	282.5
15,0°	254.9	259.7	266.2	274.9	280.0	287.7	293.3	298.3	295.3	290.9	287.2	283.7	284.2
17,5°	256.6	260.1	271.3	284.8	287.9	294.5	301.9	294.7	290.2	290.7	291.7	283.4	285.5
20,0°	263.5	268.8	274.7	282.1	289.2	296.3	303.4	296.5	296.4	293.4	288.7	286.4	289.0
22,5°	259.6	274.8	287.3	297.4	301.8	299.5	298.4	305.1	306.8	304.8	295.9	292.1	289.5
25,0°	266.1	276.1	285.1	300.8	304.0	302.6	304.5	311.0	310.2	300.7	297.4	287.1	288.5
27,5°	272.3	279.3	296.0	304.9	309.9	314.4	317.9	310.6	307.7	310.4	295.7	288.2	284.2
30,0°	274.3	289.2	300.3	316.6	310.7	316.6	319.9	318.9	312.8	302.3	293.0	291.8	303.0
32,5°	279.1	301.8	308.2	311.8	328.0	326.7	325.8	322.5	315.6	310.9	310.7	313.2	326.1
35,0°	290.3	306.6	313.9	321.4	326.3	335.7	340.7	328.4	326.0	321.2	325.3	345.8	350.0
37,5°	294.9	312.8	318.0	328.7	341.1	344.6	341.9	346.7	346.5	347.6	362.9	374.3	375.4
40,0°	294.3	313.3	322.6	331.9	343.9	353.4	365.0	349.2	364.3	390.5	399.4	410.7	406.8
42,5°	296.2	309.6	325.7	338.2	359.7	369.6	367.0	368.1	396.6	441.2	445.2	430.6	422.9
45,0°	295.8	310.9	331.9	350.3	366.0	373.9	386.4	416.1	448.0	481.0	472.9	440.8	413.9
47,5°	295.0	309.3	335.6	359.3	379.7	395.4	417.5	470.9	503.3	514.4	478.4	422.0	378.4
50,0°	297.1	314.5	341.4	367.3	399.9	438.3	493.0	538.5	552.9	521.1	455.9	389.4	328.3
52,5°	304.1	328.9	343.7	368.4	425.7	514.1	577.6	608.3	578.7	500.9	416.3	327.5	253.0
55,0°	310.1	333.9	356.5	394.4	487.6	595.7	651.0	646.3	561.3	455.6	325.0	237.0	181.1
57,5°	318.6	348.3	372.4	430.0	573.5	693.1	711.4	657.9	500.3	322.7	213.2	147.1	101.6
60,0°	324.7	361.8	392.8	503.4	688.8	759.6	755.3	579.5	348.8	203.5	120.8	83.4	65.9
62,5°	324.4	382.8	438.5	601.3	765.0	821.8	701.7	408.6	209.8	117.2	71.5	56.9	47.8
65,0°	333.4	399.5	475.5	706.3	826.4	849.8	548.2	221.0	113.1	76.8	55.7	41.0	36.7
67,5°	373.8	437.3	568.4	809.1	850.8	678.6	279.2	107.7	74.5	62.1	43.2	32.6	31.2
70,0°	387.7	464.2	653.7	826.1	758.4	435.7	109.8	75.1	59.5	49.6	33.2	30.6	30.4
72,5°	352.6	441.9	676.5	725.8	577.5	196.6	70.4	55.5	45.7	39.8	29.7	22.8	23.7
75,0°	295.8	412.3	568.9	514.5	344.7	80.9	53.8	39.8	29.9	31.3	23.0	17.7	16.7
77,5°	213.1	276.5	324.1	259.9	142.0	43.1	29.2	20.9	19.0	22.5	18.6	15.0	14.8
80,0°	96.9	99.6	98.7	79.6	43.8	20.2	12.7	11.1	13.4	14.1	12.0	9.7	10.4
82,5°	18.6	21.9	19.9	11.4	8.2	6.5	5.2	5.0	6.6	7.4	7.2	5.6	6.1
85,0°	1.2	1.2	1.3	1.4	1.4	1.6	1.6	1.7	2.2	2.8	2.5	2.3	2.1
87,5°	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.4	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 50 mini LED</b>	<b>Order number: 5XA248C31F08ME</b> <b>EAN: 4058352802519</b>	<b>LP number</b> <b>59081_1015</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6
2,5°	252.7	252.3	253.5	253.9	252.0	253.8	240.2	239.2	240.4	239.0	237.8	236.9	238.2
5,0°	261.6	262.9	262.6	262.5	264.1	265.6	242.6	240.6	238.7	238.3	235.4	234.3	235.6
7,5°	275.6	278.5	278.2	277.4	277.8	277.0	238.4	241.3	240.2	242.8	238.2	235.5	230.7
10,0°	284.8	286.5	285.3	284.2	283.5	286.0	246.7	248.1	242.7	241.4	234.0	230.9	226.1
12,5°	282.9	285.3	280.5	275.7	279.2	280.2	254.8	247.0	239.2	236.8	229.0	222.6	221.7
15,0°	281.8	277.5	277.9	279.4	277.7	277.4	244.7	239.6	238.4	234.6	230.0	219.2	214.8
17,5°	283.9	277.3	277.7	278.9	281.6	284.0	248.6	244.3	240.8	236.9	228.6	219.6	210.1
20,0°	284.6	279.3	279.5	278.5	278.6	283.3	250.4	244.8	243.7	227.9	221.0	216.4	210.3
22,5°	284.0	276.8	272.6	269.1	269.6	266.4	255.9	245.3	244.2	231.5	219.1	210.1	200.8
25,0°	275.9	270.8	271.0	266.2	274.3	266.8	255.1	246.9	247.0	236.8	224.1	207.1	197.3
27,5°	277.2	288.3	288.6	296.6	291.7	292.3	261.4	252.5	247.8	238.4	222.4	196.8	187.3
30,0°	300.5	303.6	307.8	308.9	315.5	295.9	263.4	249.0	247.9	235.1	214.7	195.0	180.4
32,5°	328.9	326.4	327.8	332.8	327.9	340.2	269.9	256.6	249.9	235.9	208.8	190.6	172.1
35,0°	351.6	348.3	339.6	342.2	331.1	336.2	268.3	256.9	245.4	228.0	192.6	183.8	161.7
37,5°	368.3	358.0	349.0	341.4	341.3	326.8	275.2	256.7	243.1	220.7	189.6	173.4	144.9
40,0°	386.9	376.4	360.5	348.9	343.2	330.2	273.0	257.9	233.4	208.2	175.4	159.5	133.5
42,5°	394.5	377.0	352.8	342.8	324.4	313.6	277.4	255.6	229.9	194.1	171.3	138.8	126.0
45,0°	373.7	341.2	311.2	287.0	275.0	280.3	269.7	257.0	221.7	179.7	156.7	124.5	119.8
47,5°	332.0	291.1	265.7	241.8	221.6	223.1	275.8	249.1	205.7	165.3	142.6	109.4	111.0
50,0°	269.1	232.1	206.2	184.4	172.7	170.4	273.8	244.3	195.3	150.3	126.0	94.7	101.4
52,5°	205.2	169.9	145.0	128.5	115.1	114.5	281.2	239.7	184.0	136.5	110.2	80.3	85.7
55,0°	131.1	105.8	91.9	86.1	80.5	76.4	280.3	234.7	170.5	129.9	97.7	73.5	69.5
57,5°	73.3	66.6	63.9	61.6	62.7	65.4	278.3	218.0	152.3	128.6	92.8	69.3	60.8
60,0°	48.6	47.2	42.4	46.5	48.7	49.2	272.7	199.4	130.1	119.1	83.8	65.0	57.4
62,5°	40.8	39.5	39.7	41.1	40.0	38.8	256.8	173.8	115.3	109.6	83.4	61.6	54.5
65,0°	37.1	33.9	37.3	36.9	36.5	33.5	258.2	159.9	96.1	94.2	81.3	61.6	46.5
67,5°	34.6	32.3	33.4	34.6	33.0	31.3	280.0	147.2	77.5	76.0	77.6	59.7	40.8
70,0°	32.0	32.4	30.4	31.7	27.2	29.4	247.6	108.4	58.8	62.7	73.3	58.4	38.2
72,5°	25.2	26.4	26.2	25.4	24.8	23.6	184.7	71.9	48.7	47.4	57.3	50.8	34.9
75,0°	18.7	17.1	18.0	18.7	18.1	18.1	95.7	27.7	25.4	34.3	36.0	34.8	26.3
77,5°	14.2	12.3	12.0	12.2	12.3	12.3	55.6	9.6	10.9	31.1	30.8	23.9	17.8
80,0°	9.5	8.8	8.8	7.5	7.9	7.8	31.0	5.8	8.6	24.2	22.9	16.0	10.4
82,5°	5.3	5.0	4.6	4.2	4.0	3.9	6.6	3.0	4.1	6.3	5.3	3.5	3.5
85,0°	2.4	2.0	1.4	1.5	1.4	1.5	1.1	1.0	1.1	0.9	0.9	0.9	0.8
87,5°	0.4	0.4	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.2	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 50 mini LED</b>	<b>Order number: 5XA248C31F08ME</b> <b>EAN: 4058352802519</b>	<b>LP number</b> <b>59081_1015</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	241.6	0.4	0.4
2,5°	241.3	240.5	242.5	240.1	240.5	238.9	241.6	240.1	240.9	241.1	242.6	2.9	3.3
5,0°	232.5	230.0	225.5	221.8	226.5	227.3	225.3	224.8	224.3	223.2	221.9	5.8	9.1
7,5°	228.8	226.5	219.5	220.7	219.6	217.7	217.0	215.7	214.0	216.2	214.1	8.8	17.9
10,0°	221.8	216.9	211.2	208.7	206.8	206.5	210.1	210.0	211.5	208.9	215.3	11.8	29.6
12,5°	221.7	219.0	212.0	208.5	206.1	204.8	203.5	204.8	201.1	201.1	201.2	14.8	44.4
15,0°	211.3	207.1	204.4	200.9	196.2	194.7	186.5	183.8	185.7	182.0	180.8	17.4	61.9
17,5°	206.3	200.6	196.9	186.4	183.3	178.8	172.8	169.8	169.5	171.3	167.7	20.1	82.0
20,0°	201.6	192.2	182.0	171.8	168.4	169.4	161.9	159.0	152.8	148.9	148.7	22.6	104.6
22,5°	189.5	176.3	168.2	165.5	154.6	153.5	147.6	143.0	146.7	143.6	139.5	25.0	129.6
25,0°	184.5	169.4	158.8	149.7	145.1	148.3	144.2	138.2	133.4	130.4	128.2	27.4	157.0
27,5°	173.0	162.7	150.4	149.3	152.3	145.3	136.2	132.8	127.0	122.5	119.2	30.2	187.2
30,0°	162.4	143.6	144.2	152.2	146.6	139.1	131.5	121.9	116.8	109.9	110.0	32.9	220.1
32,5°	151.4	142.8	146.9	152.1	141.3	130.1	121.6	111.3	102.8	98.5	94.4	36.1	256.2
35,0°	140.7	148.0	157.5	143.3	130.4	119.8	107.6	101.9	94.1	89.2	89.6	39.0	295.2
37,5°	138.0	151.9	149.9	134.8	118.8	107.3	100.5	88.0	82.4	76.3	72.6	41.9	337.1
40,0°	134.4	154.1	135.3	122.6	107.1	94.1	82.6	75.7	70.2	69.0	67.6	44.8	381.9
42,5°	138.4	139.5	121.1	109.8	93.4	82.5	71.8	67.9	67.8	68.3	64.3	47.4	429.2
45,0°	135.6	129.0	109.2	95.4	84.3	74.3	65.8	66.7	65.5	64.6	65.4	48.8	478.1
47,5°	125.8	116.1	98.6	83.3	73.0	64.2	64.1	63.7	65.2	64.9	63.6	49.6	527.7
50,0°	107.6	99.0	88.5	78.2	64.9	64.1	63.1	62.8	63.9	65.5	68.4	50.0	577.6
52,5°	82.9	78.7	77.0	68.7	62.1	60.2	64.1	62.3	63.2	61.5	60.9	49.5	627.1
55,0°	64.7	64.0	67.3	59.9	58.1	58.2	61.6	60.8	61.2	59.8	60.3	48.5	675.6
57,5°	53.0	55.4	58.6	53.2	55.7	56.3	57.2	58.4	55.2	57.5	58.2	47.1	722.8
60,0°	49.5	48.0	49.5	47.1	48.3	48.9	50.3	49.9	51.1	50.6	52.4	45.5	768.2
62,5°	42.5	42.0	42.1	39.9	42.7	41.6	42.2	42.0	42.4	42.1	39.2	43.6	811.9
65,0°	40.5	35.1	38.1	36.5	35.7	35.7	33.2	31.9	31.9	30.6	32.6	41.7	853.6
67,5°	33.0	31.2	36.8	31.9	30.2	29.8	27.8	24.5	24.4	22.9	23.8	39.4	892.9
70,0°	29.7	26.8	31.6	27.6	24.7	23.0	20.2	19.4	17.5	17.6	16.9	35.6	928.5
72,5°	23.8	22.1	24.3	22.0	18.8	15.9	14.1	13.3	12.0	11.5	10.8	29.6	958.2
75,0°	17.8	15.2	17.8	16.9	13.4	11.6	9.2	7.4	6.2	5.9	5.9	21.6	979.7
77,5°	13.5	11.4	11.0	11.4	10.7	7.7	5.3	3.3	2.5	1.9	1.7	12.8	992.6
80,0°	7.9	5.9	6.5	6.2	5.3	4.4	3.9	1.5	1.0	0.8	0.8	5.5	998.1
82,5°	3.3	2.7	2.5	2.3	2.2	1.7	2.0	0.7	0.3	0.2	0.2	1.5	999.6
85,0°	0.6	0.6	0.5	0.4	0.2	0.2	0.2	0.1	0.0	0.1	0.1	0.3	999.9
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 50 mini LED	<b>Order number: 5XA248C31F08ME</b> <b>EAN: 4058352802519</b>	<b>LP number</b> 59081_1015
----------------------------------	--	--------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	15660	107.8	118.4	113.1
95	241	252	14859	100.5	110.4	105.4
90	229	250	14119	94.0	103.1	98.6
85	216	248	13317	87.3	95.7	91.5
80	203	246	12516	80.9	88.7	84.8
75	190	243	11714	74.7	81.8	78.2
70	178	241	10974	69.2	75.7	72.4
65	165	238	10173	63.4	69.3	66.4
60	152	235	9371	57.8	63.2	60.5
55	140	232	8631	52.8	57.6	55.2
50	127	229	7830	47.4	51.9	49.6
45	114	225	7029	42.1	46.0	44.0
40	102	221	6289	37.5	40.9	39.2
35	89	216	5487	32.5	35.5	34.0
30	76	210	4686	27.8	30.2	29.0
25	63	203	3884	23.1	25.0	24.0
20	51	195	3144	19.0	20.6	19.8
15	38	184	2343	14.6	15.8	15.2
14	36	182	2220	13.9	15.0	14.4