

Photometric test report

Family
Silica® 21

Order number: 51MX22TCTAS
EAN: 4058352800157

LP number
59272_138



Version surface-mounted luminaire, reflector, black, direct distribution, wide distribution, UGR≤19 (L65≤1000cd/m²), tunable white

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting factory setting

Rated values Net luminous flux = 9300 lm
Power consumption = 84.5 W
Luminous efficacy = 110.1 lm/W

serial
documentation
03.05.2023


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 700 cd/klm

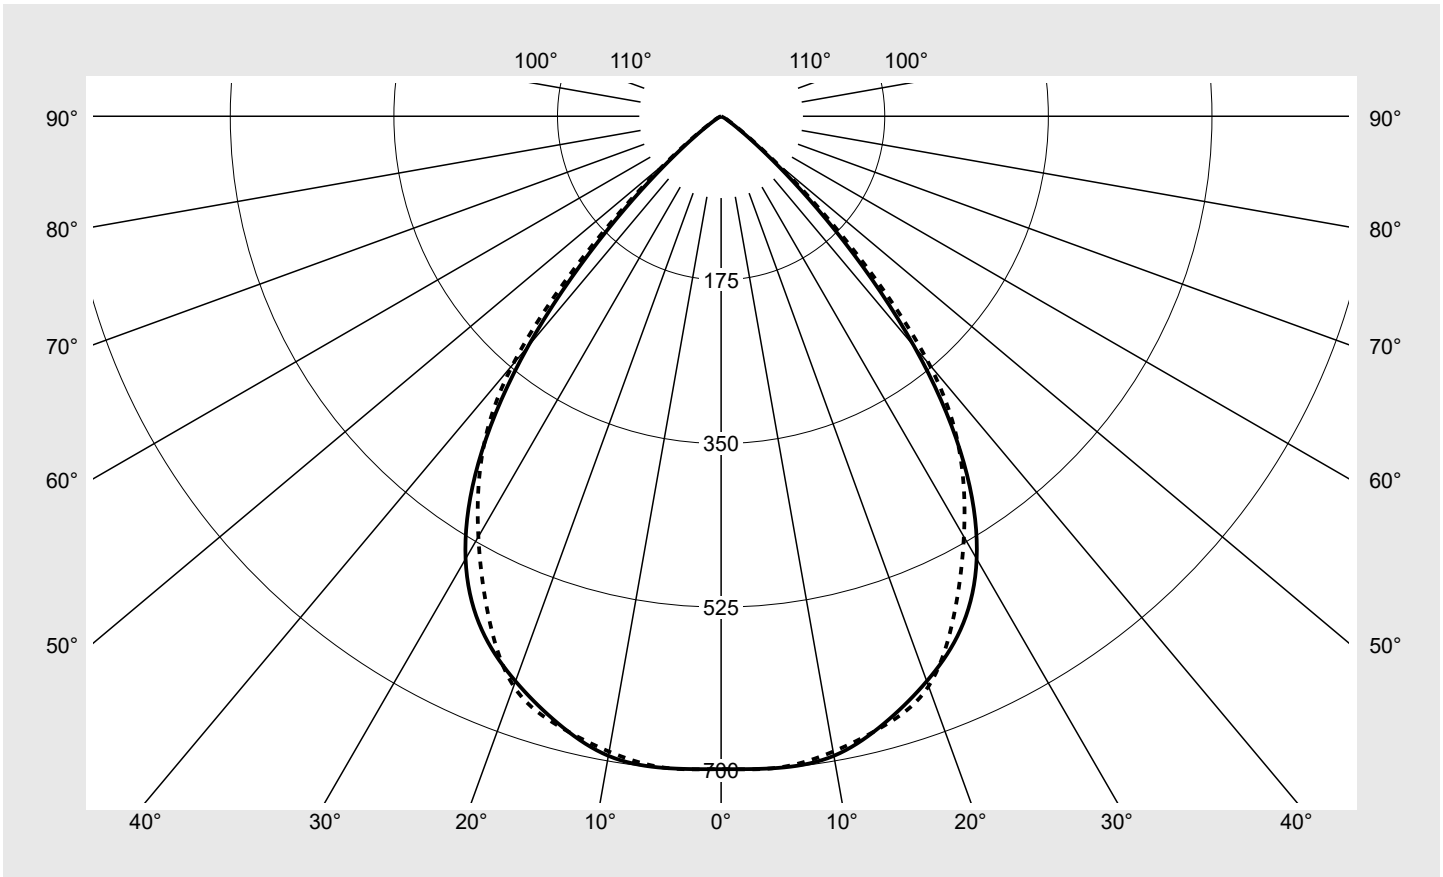

Classifications

DIN 5040 A 6 0
CIE N1=84 N2=99 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX22TCTAS EAN: 4058352800157	LP number 59272_138
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	698.3	698.3	698.3	698.3	698.3	698.3	698.3	4.2	4.2
5°	699.6	698.5	693.9	696.9	698.4	696.4	699.4	33.3	37.5
10°	694.6	694.5	689.5	695.3	694.0	687.7	690.0	65.9	103.4
15°	672.6	676.2	675.2	682.1	683.0	677.2	674.7	96.2	199.5
20°	643.1	649.9	651.2	653.1	656.2	653.1	648.8	122.2	321.7
25°	605.9	614.8	613.8	608.6	601.9	597.0	589.1	140.3	462.0
30°	546.6	557.0	551.8	537.6	523.2	517.8	519.3	147.1	609.1
35°	452.6	459.5	452.6	444.2	440.2	442.2	446.7	140.9	750.0
40°	321.1	327.1	329.4	337.0	343.8	344.5	346.6	118.4	868.3
45°	172.2	187.2	203.3	211.2	210.4	196.6	193.1	77.0	945.3
50°	63.8	73.4	88.4	94.7	94.6	78.0	74.0	34.9	980.1
55°	17.5	22.2	30.2	37.1	33.0	23.7	21.3	12.4	992.5
60°	5.9	7.1	10.7	14.2	11.5	8.5	8.2	4.7	997.2
65°	2.1	2.5	3.7	4.8	4.2	3.3	3.2	1.8	998.9
70°	1.4	1.5	1.1	1.1	1.3	1.7	1.7	0.7	999.6
75°	0.3	0.4	0.3	0.5	0.4	0.5	0.5	0.2	999.9
80°	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.1	999.9
85°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX22TCTAS EAN: 4058352800157	LP number 59272_138
-----------------------------	---	-------------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.6	19.9	19.0	20.2	20.6	18.7	20.0	19.1	20.4	20.7
	3H	18.5	19.6	18.9	20.0	20.3	18.6	19.8	19.0	20.1	20.4
	4H	18.4	19.5	18.8	19.8	20.2	18.5	19.6	18.9	19.9	20.3
	6H	18.4	19.3	18.8	19.7	20.1	18.5	19.4	18.9	19.8	20.2
	8H	18.4	19.2	18.8	19.6	20.0	18.5	19.3	18.9	19.7	20.1
	12H	18.4	19.1	18.8	19.5	19.9	18.5	19.2	18.9	19.6	20.1
4H	2H	18.5	19.5	18.9	19.9	20.2	18.6	19.6	19.0	20.0	20.3
	3H	18.3	19.2	18.7	19.6	20.0	18.4	19.3	18.8	19.7	20.1
	4H	18.2	19.0	18.7	19.4	19.8	18.3	19.1	18.8	19.5	19.9
	6H	18.1	18.8	18.6	19.2	19.7	18.3	18.9	18.7	19.3	19.8
	8H	18.1	18.7	18.6	19.1	19.6	18.2	18.8	18.7	19.2	19.7
	12H	18.1	18.6	18.6	19.0	19.5	18.2	18.7	18.7	19.1	19.6
8H	4H	18.1	18.7	18.6	19.1	19.6	18.2	18.8	18.7	19.2	19.7
	6H	18.0	18.5	18.5	18.9	19.5	18.1	18.6	18.6	19.1	19.6
	8H	17.9	18.4	18.4	18.8	19.4	18.0	18.5	18.6	19.0	19.5
	12H	17.9	18.2	18.4	18.7	19.3	18.0	18.4	18.6	18.9	19.4
12H	4H	18.1	18.6	18.6	19.0	19.5	18.2	18.7	18.7	19.1	19.6
	6H	18.0	18.4	18.5	18.8	19.4	18.1	18.5	18.6	19.0	19.5
	8H	17.9	18.2	18.4	18.7	19.3	18.0	18.4	18.6	18.9	19.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2940 B = 49
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		15725.2	17086.3	18560.6	19278.1	19212.9	17951.7	17629.9	
50°		6408.6	7376.3	8881.8	9511.4	9497.6	7836.5	7432.3	
55°		1966.5	2494.6	3397.9	4177.4	3714.3	2661.8	2393.3	
60°		763.8	919.4	1380.1	1837.0	1479.1	1094.1	1054.1	
65°		326.0	385.7	558.8	735.7	645.4	500.6	489.0	
70°		257.1	274.3	208.6	204.0	247.3	319.2	327.3	
75°		76.1	101.0	84.3	117.7	109.2	128.2	116.5	
80°		21.2	24.9	35.3	46.1	60.2	71.0	74.4	
85°		28.1	31.9	52.6	74.1	102.2	130.4	141.5	

Photometric test report

Family Silica® 21	Order number: 51MX22TCTAS EAN: 4058352800157	LP number 59272_138
------------------------------------	---	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

