




# Photometric test report

<b>Family</b> <b>Round 31</b>	<b>Order number: 5PJA130001A</b> <b>EAN: 4058352955147</b>	<b>LP number</b> <b>59497_9</b>
	<b>Version</b> surface-mounted luminaire, diffuser, cambered, opal, PMMA, with homogeneous illumination, extremely wide distribution	<b>serial documentation</b> 08.11.2023
	<b>Lamps</b> LED 4000 K   CRI ≥ 80	
	<b>Controlgear</b> ECG	
	<b>Rated values</b> Net luminous flux = 2700 lm Power consumption = 21.0 W Luminous efficacy = 128.6 lm/W	

**Luminous intensity in cd/klm** C180-0 **Imax: 271 cd/klm**

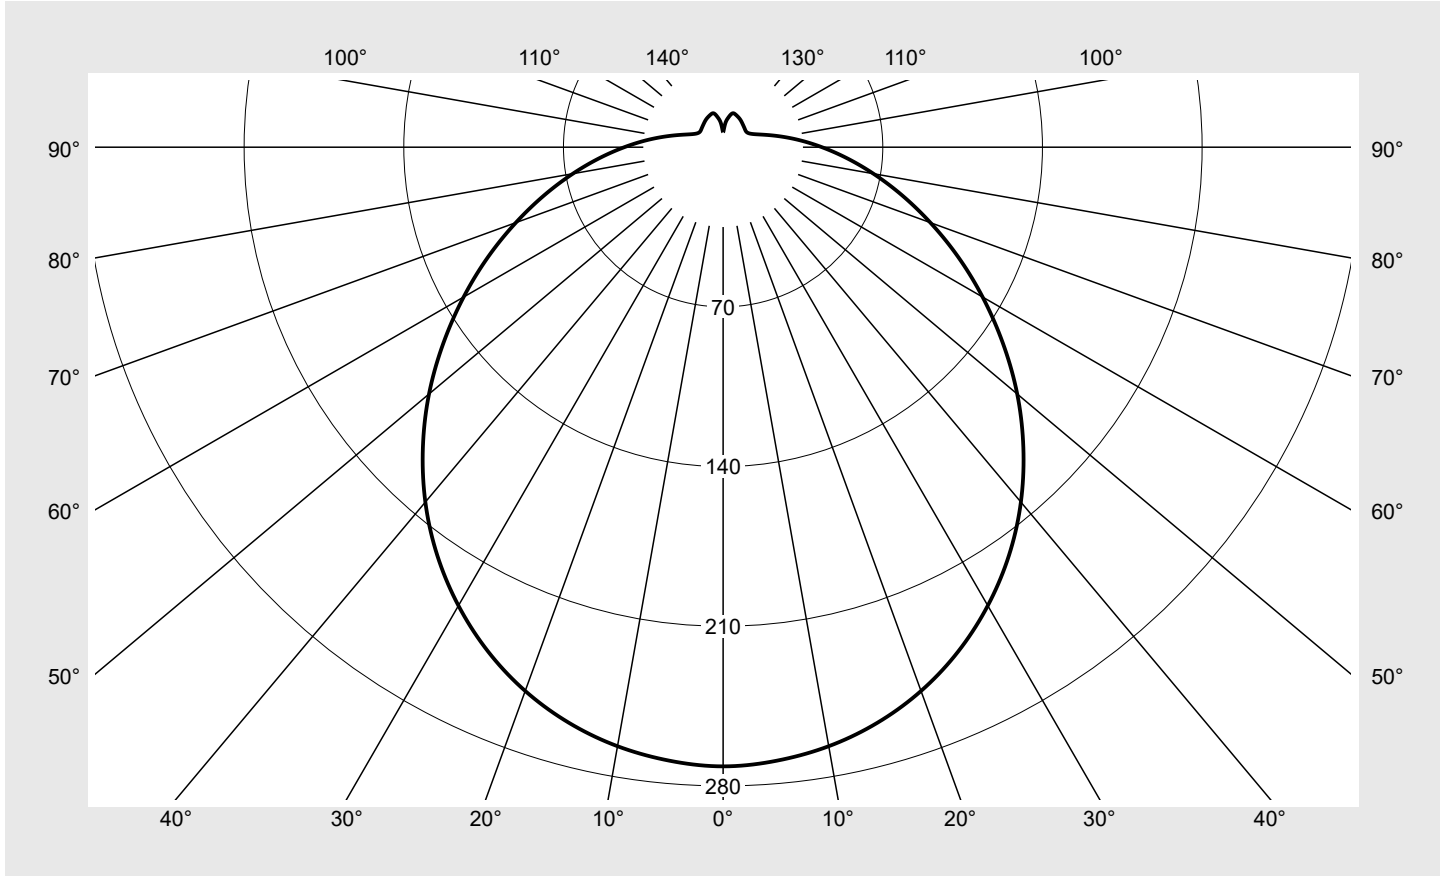

Classifications	
DIN 5040	B 3 1
CIE	N1=42 N2=71 N3=89 N4=88 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	88.4%
$\phi_o$	11.6%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family Round 31	Order number: 5PJA130001A EAN: 4058352955147	LP number 59497_9
--------------------	---	----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	271.4	1.6	1.6
5°	270.0	12.9	14.5
10°	266.7	25.4	39.9
15°	261.2	37.1	77.0
20°	253.7	47.6	124.5
25°	243.9	56.5	181.0
30°	232.1	63.6	244.6
35°	218.5	68.7	313.3
40°	203.1	71.6	384.9
45°	186.2	72.2	457.0
50°	168.3	70.7	527.7
55°	149.7	67.2	594.9
60°	131.4	62.4	657.3
65°	113.6	56.5	713.7
70°	96.7	49.8	763.5
75°	81.1	42.9	806.5
80°	66.9	36.1	842.6
85°	54.3	29.7	872.3
90°	43.3	23.8	896.0
95°	34.1	18.6	914.6
100°	26.4	14.3	928.9
105°	20.6	10.9	939.8
110°	16.4	8.4	948.2
115°	13.8	6.9	955.1
120°	12.5	6.0	961.0
125°	12.2	5.5	966.5
130°	12.4	5.2	971.7
135°	12.8	5.0	976.7
140°	13.3	4.7	981.4
145°	13.9	4.4	985.7
150°	14.4	4.0	989.7
155°	14.9	3.5	993.2
160°	15.4	2.9	996.0
165°	15.3	2.2	998.2
170°	13.2	1.3	999.5
175°	10.3	0.5	1000.0
180°	6.6	0.0	1000.0

## Photometric test report

Family Round 31	Order number: 5PJA130001A EAN: 4058352955147	LP number 59497_9
--------------------	---	----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.7	19.3	18.2	19.7	20.2	17.7	19.3	18.2	19.7	20.2
	3H	19.6	21.1	20.0	21.5	22.0	19.6	21.1	20.0	21.5	22.0
	4H	20.4	21.8	20.9	22.3	22.8	20.4	21.8	20.9	22.3	22.8
	6H	21.3	22.5	21.8	23.1	23.6	21.3	22.5	21.8	23.1	23.6
	8H	21.7	22.9	22.2	23.4	24.0	21.7	22.9	22.2	23.4	24.0
	12H	22.1	23.2	22.7	23.8	24.4	22.1	23.2	22.7	23.8	24.4
4H	2H	18.5	19.8	18.9	20.3	20.8	18.5	19.8	18.9	20.3	20.8
	3H	20.5	21.7	21.0	22.2	22.8	20.5	21.7	21.0	22.2	22.8
	4H	21.5	22.6	22.1	23.1	23.7	21.5	22.6	22.1	23.1	23.7
	6H	22.5	23.5	23.1	24.1	24.7	22.5	23.5	23.1	24.1	24.7
	8H	23.0	23.9	23.6	24.5	25.1	23.0	23.9	23.6	24.5	25.1
	12H	23.5	24.3	24.1	24.9	25.6	23.5	24.3	24.1	24.9	25.6
8H	4H	21.9	22.8	22.5	23.4	24.1	21.9	22.8	22.5	23.4	24.1
	6H	23.2	23.9	23.8	24.5	25.2	23.2	23.9	23.8	24.5	25.2
	8H	23.8	24.5	24.4	25.1	25.8	23.8	24.5	24.4	25.1	25.8
	12H	24.5	25.0	25.1	25.7	26.4	24.5	25.0	25.1	25.7	26.4
12H	4H	22.0	22.8	22.6	23.4	24.1	22.0	22.8	22.6	23.4	24.1
	6H	23.3	24.0	24.0	24.6	25.3	23.3	24.0	24.0	24.6	25.3
	8H	24.0	24.6	24.7	25.3	26.0	24.0	24.6	24.7	25.3	26.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 360	H(C0) = 45 H(C90) = 45	H(C180) = 45 H(C270) = 45
-----------------	---------------------------------	---------------------------------------	---------------------------	------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	6024.3
50°	5838.6
55°	5641.4
60°	5463.2
65°	5317.4
70°	5218.0
75°	5214.8
80°	5372.1
85°	5863.0

**Photometric test report**

<b>Family</b> <b>Round 31</b>	<b>Order number: 5PJA130001A</b> <b>EAN: 4058352955147</b>	<b>LP number</b> <b>59497_9</b>
----------------------------------	---	------------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$ 65°	$\gamma$ 70°	$\gamma$ 75°	$\gamma$ 80°	$\gamma$ 85°
--------------	--------------	--------------	--------------	--------------

**siteco**

