
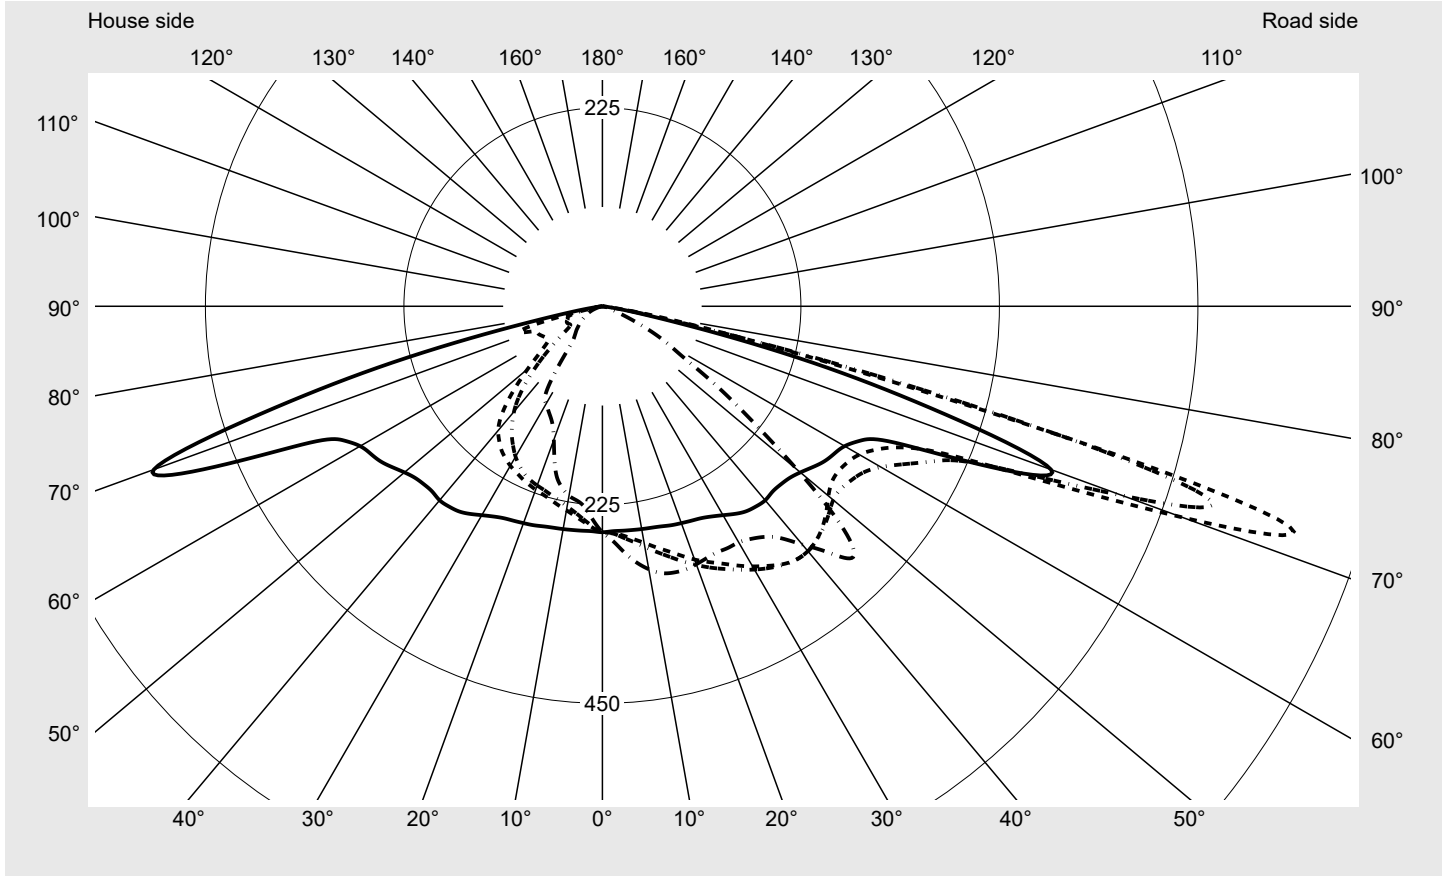


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P0.8a G), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 20170 lm Power consumption = 155.5 W Luminous efficacy = 129.7 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 802 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	699.8
Imax 80°	48.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
--	--	------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

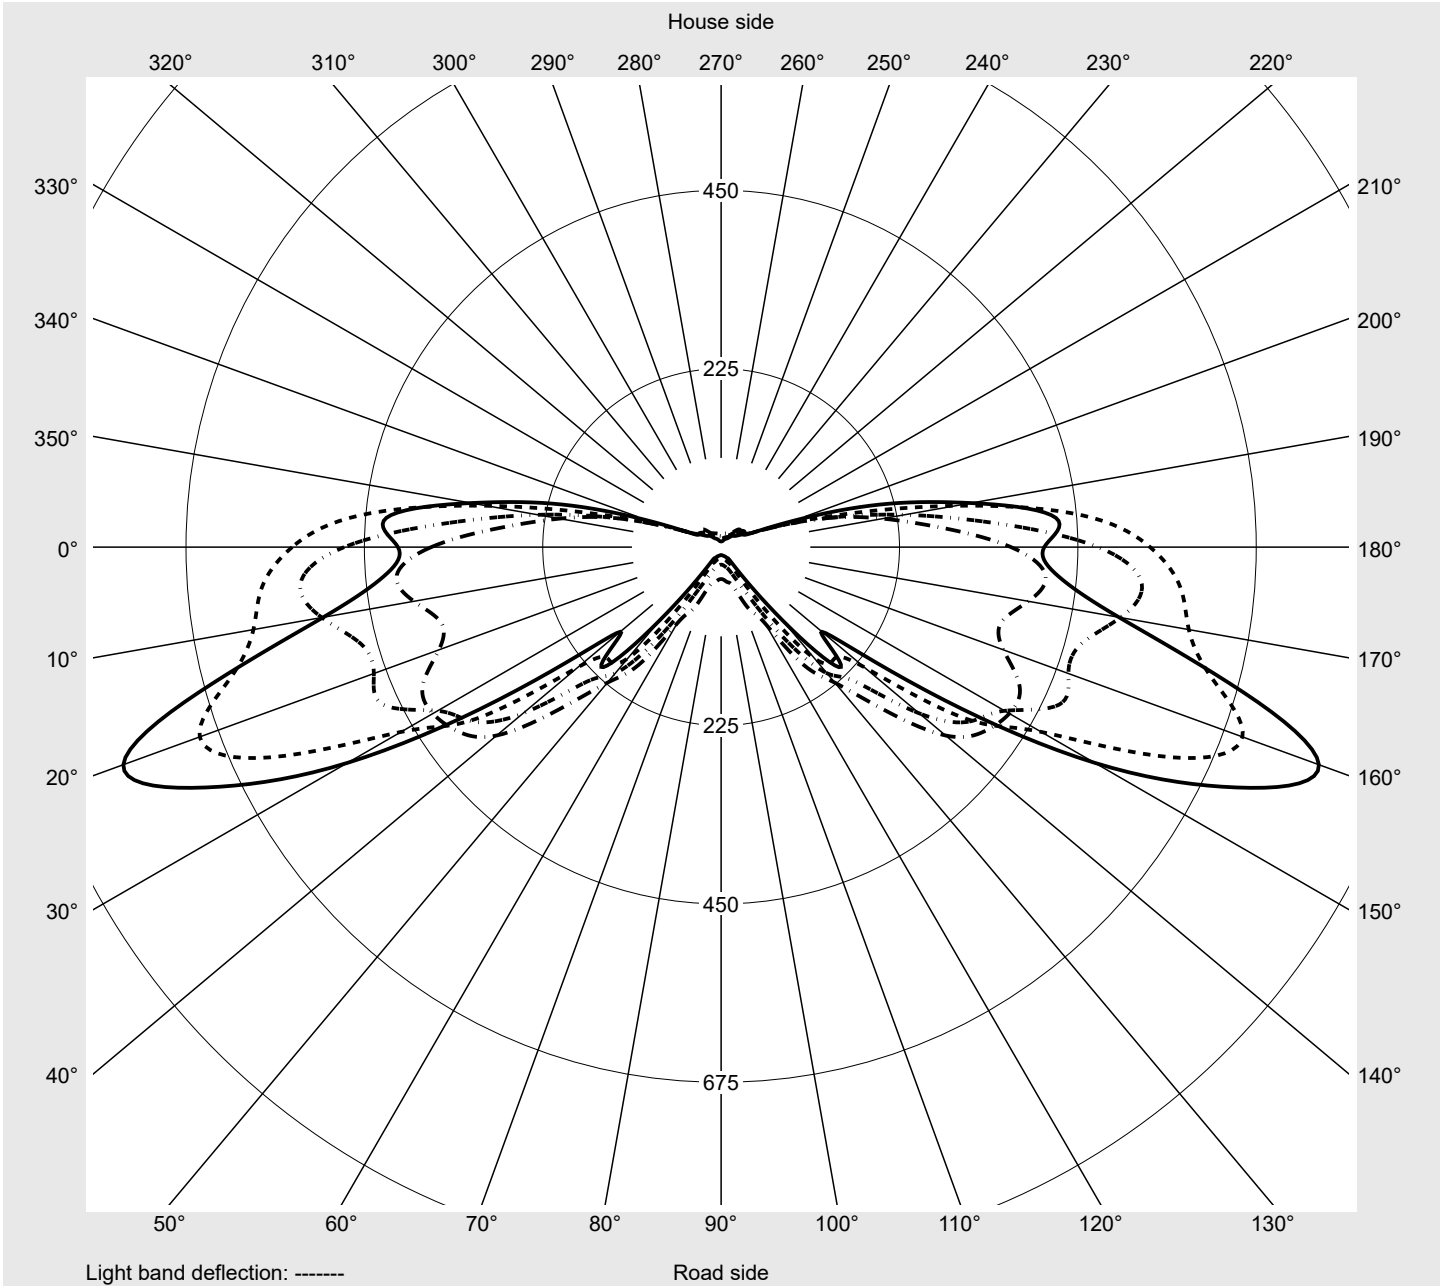

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	255.3	255.8	256.2	256.7	257.1	257.7	258.2	259.1	260.2	260.9	261.9	262.7	263.5
5,0°	255.4	256.0	256.7	258.2	260.6	263.0	265.0	267.2	269.2	270.8	272.6	274.1	275.5
7,5°	255.8	256.5	258.8	262.3	266.0	269.3	272.5	275.5	278.7	281.2	283.2	285.3	287.1
10,0°	256.4	258.2	262.5	267.4	272.2	277.0	280.9	284.5	288.5	291.7	293.9	296.0	297.8
12,5°	257.1	260.9	266.8	273.2	279.7	285.3	290.3	294.6	298.1	301.2	303.7	305.6	306.7
15,0°	258.3	264.2	271.8	280.0	287.4	293.9	299.5	303.5	306.9	309.1	310.8	311.9	312.4
17,5°	260.2	268.3	277.9	287.3	296.2	303.2	308.2	312.5	314.9	316.4	317.2	317.3	316.9
20,0°	261.6	272.9	284.4	295.3	305.5	312.0	317.0	319.8	321.2	321.9	321.7	320.7	318.8
22,5°	263.1	277.0	290.3	303.3	313.7	320.7	324.6	326.8	327.1	326.4	324.8	322.4	319.7
25,0°	265.0	281.9	297.1	311.8	321.9	328.6	332.3	333.7	333.0	330.6	327.4	324.0	320.7
27,5°	268.6	288.3	306.1	321.3	331.3	336.7	339.1	339.5	337.5	333.9	329.6	324.8	321.6
30,0°	273.4	296.2	316.3	331.6	340.5	344.6	345.4	344.5	341.6	337.2	332.0	327.5	323.8
32,5°	279.0	304.5	326.5	341.2	348.9	351.8	351.2	348.6	344.6	339.9	335.3	331.3	328.2
35,0°	283.7	312.2	336.3	351.1	356.8	357.7	355.9	351.8	347.5	343.8	340.9	338.8	336.1
37,5°	286.0	316.7	341.7	356.3	361.7	361.7	358.7	354.3	350.4	348.5	348.6	348.6	346.9
40,0°	287.0	320.2	345.2	358.6	362.5	362.3	359.1	356.2	355.0	355.8	360.4	364.2	362.1
42,5°	285.2	320.5	345.2	356.6	359.3	359.4	357.7	358.0	360.8	366.6	375.3	381.6	382.2
45,0°	285.7	320.8	343.5	351.3	353.0	354.6	355.8	360.2	369.0	380.9	393.4	402.6	408.6
47,5°	288.0	322.1	341.1	344.6	344.3	348.1	356.0	368.0	382.4	400.3	415.5	427.5	433.5
50,0°	292.9	325.0	338.7	336.5	334.5	341.6	358.1	378.1	396.9	417.8	434.4	441.6	427.3
52,5°	299.8	329.7	337.4	330.5	327.7	340.5	363.0	389.7	411.7	431.2	433.9	412.3	374.4
55,0°	306.7	334.2	337.1	326.9	326.4	344.1	371.1	403.3	424.1	433.0	402.1	355.6	306.8
57,5°	311.3	338.1	337.2	325.8	329.4	350.7	382.2	417.7	428.2	420.6	361.9	294.3	250.8
60,0°	317.1	344.9	339.9	328.5	336.3	364.5	398.6	425.7	422.2	393.2	312.0	249.9	207.3
62,5°	329.8	361.2	352.4	337.4	351.3	387.3	415.1	423.8	402.5	347.1	258.8	209.0	152.8
65,0°	365.7	410.8	393.4	366.1	378.8	415.5	419.8	405.2	369.7	289.8	223.3	181.2	111.5
67,5°	475.5	532.7	511.4	470.6	466.2	470.3	412.9	383.3	326.1	240.4	207.7	145.1	77.1
70,0°	541.1	581.5	599.1	641.5	699.8	627.4	466.2	377.8	235.4	200.6	183.3	93.1	32.6
72,5°	407.6	427.6	509.6	664.1	802.4	717.3	544.2	314.9	166.3	213.7	120.9	30.9	16.2
75,0°	246.2	264.5	277.6	328.6	402.1	429.8	318.1	215.1	231.4	176.6	43.4	14.0	11.6
77,5°	93.3	138.1	128.7	130.6	145.2	140.9	88.4	120.4	200.4	113.6	14.2	10.2	8.3
80,0°	29.0	40.6	45.8	48.4	48.9	39.2	14.5	19.3	31.3	15.5	8.5	6.2	5.1
82,5°	7.0	8.7	10.9	12.4	6.5	13.3	5.2	3.5	4.0	2.8	2.9	2.7	2.5
85,0°	2.5	2.4	2.2	2.0	2.0	2.0	1.6	1.5	1.3	1.3	1.3	1.0	1.0
87,5°	1.3	1.3	1.3	1.1	1.0	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	264.1	264.7	265.0	265.5	265.8	266.0	254.1	252.7	252.0	251.3	249.9	248.7	247.5
5,0°	276.5	277.4	278.2	279.0	279.4	279.6	252.9	250.3	247.5	245.1	242.6	240.3	238.0
7,5°	288.6	289.8	290.7	291.5	292.1	292.5	252.2	247.5	243.3	239.7	235.8	232.7	230.1
10,0°	299.2	300.1	301.2	302.0	302.6	302.6	251.6	245.2	239.6	234.8	230.3	226.7	224.1
12,5°	307.5	308.1	308.7	309.4	309.6	309.8	251.8	243.7	236.5	230.9	225.4	222.3	220.0
15,0°	312.3	312.0	312.2	312.5	312.5	312.5	252.3	242.2	234.1	226.9	221.9	218.5	216.3
17,5°	315.9	314.3	313.4	313.1	312.8	312.9	252.5	240.7	231.1	223.7	218.6	215.3	212.6
20,0°	316.9	314.9	313.3	311.8	311.3	311.2	252.9	239.7	228.7	221.2	216.2	212.2	207.6
22,5°	317.2	314.1	311.8	310.2	309.1	308.9	252.5	237.9	226.0	218.4	213.4	208.2	200.7
25,0°	317.2	314.4	311.8	309.4	307.8	307.7	252.2	235.8	223.1	215.4	209.5	201.4	194.1
27,5°	318.6	315.5	312.6	310.2	308.7	308.7	252.3	234.2	220.7	211.9	203.6	193.1	183.9
30,0°	320.9	318.1	314.3	311.1	309.3	308.9	254.6	234.1	218.7	208.7	196.9	183.9	171.6
32,5°	325.2	322.1	318.3	315.3	313.4	312.7	256.0	233.4	216.4	204.3	188.2	171.8	154.5
35,0°	333.0	329.2	325.4	322.1	319.9	319.2	258.1	233.4	214.1	199.3	179.0	157.4	134.1
37,5°	343.1	339.8	336.7	333.6	331.9	331.1	256.3	230.9	210.2	192.2	168.0	141.7	114.8
40,0°	360.0	358.4	357.7	354.8	353.2	352.5	254.2	226.4	204.5	183.7	155.9	124.9	99.4
42,5°	383.8	385.0	385.3	381.7	379.0	378.1	249.1	218.4	193.8	170.3	140.9	110.7	86.3
45,0°	412.5	413.9	412.7	407.8	403.4	402.0	244.4	208.8	179.6	151.5	122.7	97.5	74.3
47,5°	431.9	419.1	401.0	382.9	370.4	366.1	243.2	201.6	166.1	130.5	103.5	85.3	64.9
50,0°	396.5	359.5	329.9	307.1	292.2	288.0	247.0	199.5	154.8	110.5	84.9	72.4	57.4
52,5°	326.1	280.0	250.8	231.5	218.8	215.0	251.4	198.7	147.9	93.2	68.1	60.2	52.1
55,0°	257.8	216.1	191.0	175.0	163.6	160.6	257.4	200.1	143.2	80.9	54.9	50.5	49.7
57,5°	209.3	172.2	145.8	127.8	116.2	112.4	260.4	199.2	139.4	73.0	45.5	44.0	46.7
60,0°	162.7	129.1	107.8	95.3	88.6	87.0	260.2	198.1	139.8	72.6	42.0	38.5	42.9
62,5°	121.1	93.2	79.2	72.8	66.6	64.1	261.6	198.3	141.4	74.7	43.1	36.4	39.2
65,0°	88.5	62.5	47.9	44.8	41.5	40.3	279.6	207.0	143.0	77.4	44.2	35.7	35.2
67,5°	45.4	31.8	26.8	24.3	22.6	22.2	347.1	234.7	143.9	79.3	43.6	33.8	31.5
70,0°	21.6	17.7	16.0	15.3	14.5	14.2	458.1	300.3	160.0	82.8	41.8	33.2	28.4
72,5°	13.7	12.2	11.3	10.7	10.2	10.0	423.8	320.2	207.5	97.4	41.2	31.7	25.8
75,0°	10.1	9.0	8.1	7.7	7.2	7.2	209.9	193.5	168.4	77.5	35.6	28.6	23.1
77,5°	7.0	6.1	5.4	5.1	4.7	4.6	67.8	68.8	55.1	23.2	21.9	22.0	18.9
80,0°	4.1	3.7	3.2	2.9	2.8	2.8	19.2	18.9	14.7	9.8	10.9	12.8	12.6
82,5°	2.3	2.1	1.9	1.7	1.6	1.7	5.4	5.0	4.9	5.3	5.5	6.3	6.2
85,0°	1.0	1.0	0.9	0.8	0.8	0.8	2.5	2.6	2.7	2.7	2.7	2.5	2.3
87,5°	0.6	0.5	0.4	0.4	0.4	0.4	1.3	1.5	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	0.4	0.4
2,5°	246.5	245.9	245.1	244.3	243.7	243.5	243.2	242.8	242.7	242.6	242.6	3.0	3.4
5,0°	235.9	234.5	233.1	231.7	230.7	230.0	229.4	228.9	228.8	228.9	228.8	6.1	9.5
7,5°	227.6	226.1	224.9	223.7	222.9	222.6	222.1	222.1	222.1	222.1	222.1	9.1	18.6
10,0°	222.0	220.7	219.9	219.3	218.8	218.6	218.4	218.3	218.2	218.1	218.1	12.2	30.8
12,5°	218.2	217.1	216.1	215.2	214.2	213.1	211.9	211.4	211.0	210.6	210.7	15.3	46.1
15,0°	214.8	212.9	210.8	208.0	205.7	204.0	202.3	201.1	200.4	200.0	199.9	18.3	64.4
17,5°	209.5	205.5	202.2	199.0	195.7	192.5	188.9	185.6	183.2	181.5	180.9	21.2	85.6
20,0°	202.1	198.0	193.3	188.5	182.0	175.6	170.1	166.1	163.3	161.6	161.0	23.8	109.5
22,5°	194.9	188.8	182.1	173.1	165.0	158.5	153.6	150.5	148.6	147.4	147.0	26.4	135.8
25,0°	186.5	177.8	167.1	157.6	150.1	145.3	142.3	140.5	139.5	138.9	138.8	28.9	164.7
27,5°	174.2	161.1	149.5	141.3	136.2	133.3	132.5	132.7	132.9	132.8	132.9	31.3	196.0
30,0°	156.2	142.0	131.9	125.7	123.8	123.9	124.9	126.0	126.9	127.3	127.5	33.6	229.6
32,5°	135.4	121.4	112.6	109.8	110.7	114.2	118.5	121.7	121.8	121.3	121.0	35.8	265.4
35,0°	114.0	99.7	92.6	93.1	99.5	105.7	107.7	106.6	103.5	100.4	99.0	37.8	303.2
37,5°	94.9	80.9	76.9	81.3	86.7	87.6	84.6	80.5	76.5	73.4	72.1	39.4	342.6
40,0°	79.0	67.7	66.9	70.7	70.9	68.6	66.0	62.0	57.9	55.1	54.0	41.4	383.9
42,5°	67.7	60.7	61.9	61.8	61.0	59.2	55.0	51.3	49.1	47.7	47.2	43.6	427.6
45,0°	60.1	58.1	57.9	56.8	55.7	51.4	47.8	45.6	44.2	43.4	43.1	46.0	473.6
47,5°	56.2	56.3	54.5	54.0	50.0	45.6	43.0	41.3	40.4	39.9	39.7	47.5	521.1
50,0°	54.3	53.5	52.3	49.5	44.0	40.7	38.7	37.2	36.5	36.0	35.9	46.9	568.0
52,5°	53.7	50.6	49.0	44.4	39.0	36.3	34.6	33.7	33.1	32.8	32.8	45.3	613.2
55,0°	52.1	46.9	44.8	38.9	34.5	32.5	31.1	30.3	29.8	29.5	29.6	43.5	656.8
57,5°	46.5	42.6	39.5	33.8	30.7	28.8	27.2	26.5	26.2	25.9	26.0	41.9	698.7
60,0°	41.1	38.6	35.1	29.5	26.9	25.3	24.1	23.7	23.2	23.0	23.0	40.6	739.3
62,5°	36.4	35.1	30.1	25.4	23.4	22.0	21.3	20.8	20.3	20.1	20.1	39.5	778.8
65,0°	32.6	31.7	25.8	21.6	20.4	19.1	18.5	17.8	17.3	17.0	17.0	39.3	818.1
67,5°	28.8	27.9	22.6	18.5	17.3	16.3	15.5	14.9	14.3	14.0	13.9	42.2	860.3
70,0°	25.5	24.4	19.6	15.9	14.8	13.8	12.9	12.0	11.2	10.8	10.7	47.5	907.8
72,5°	21.9	20.1	16.4	13.5	12.2	10.9	9.5	8.3	7.6	7.2	7.2	45.6	953.4
75,0°	18.4	15.9	13.0	10.7	9.3	8.6	6.7	5.6	5.1	4.8	4.8	28.3	981.6
77,5°	14.5	11.7	9.1	7.2	6.3	6.0	4.2	3.4	2.9	2.7	2.7	12.7	994.3
80,0°	10.2	7.7	5.5	4.4	3.9	3.5	2.5	1.8	1.4	1.1	1.0	3.8	998.2
82,5°	5.4	4.1	3.0	2.3	1.8	1.6	1.3	1.0	0.8	0.6	0.4	1.2	999.3
85,0°	2.1	1.8	1.5	1.2	0.9	0.8	0.6	0.6	0.4	0.4	0.3	0.4	999.8
87,5°	1.1	1.0	0.9	0.8	0.6	0.6	0.5	0.4	0.4	0.3	0.3	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	20170	155.5	162.3	158.9
95	241	252	19138	145.2	151.4	148.3
90	229	250	18185	136.1	141.8	139.0
85	216	248	17152	126.6	131.8	129.2
80	203	246	16120	117.4	122.2	119.8
75	190	243	15088	108.5	112.9	110.7
70	178	241	14135	100.5	104.6	102.6
65	165	238	13103	92.0	95.8	93.9
60	152	235	12070	83.8	87.1	85.4
55	140	232	11117	76.5	79.5	78.0
50	127	229	10085	68.7	71.5	70.1
45	114	225	9053	61.1	63.6	62.4
40	102	221	8100	54.3	56.5	55.4
35	89	216	7067	47.0	48.9	48.0
30	76	210	6035	39.8	41.3	40.6
25	63	203	5003	32.8	34.0	33.4
20	51	195	4050	26.6	27.6	27.1
15	38	184	3018	20.0	20.8	20.4
10	25	169	1985	13.6	14.1	13.8
9	23	166	1826	12.6	13.1	12.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	20170	151.3	157.7	154.5
95	241	252	19138	141.7	147.7	144.7
90	229	250	18185	133.1	138.7	135.9
85	216	248	17153	124.1	129.2	126.6
80	203	246	16120	115.4	120.2	117.8
75	190	243	15088	106.9	111.3	109.1
70	178	241	14135	99.2	103.3	101.2
65	165	238	13103	91.1	94.8	92.9
60	152	235	12070	83.1	86.5	84.8
55	140	232	11117	75.9	79.0	77.4
50	127	229	10085	68.3	71.1	69.7
45	114	225	9053	61.0	63.4	62.2
40	102	221	8100	54.2	56.4	55.3
35	89	216	7068	46.8	48.9	47.8
30	76	210	6035	39.8	41.3	40.6
25	63	203	5003	32.9	34.1	33.5
20	51	195	4050	26.7	27.7	27.2
15	38	184	3018	20.1	20.8	20.5
10	25	169	1985	13.8	14.2	14.0
9	23	166	1826	12.7	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20170	153.0	159.4	156.2
95	241	252	19139	143.1	149.0	146.0
90	229	250	18186	134.3	139.8	137.0
85	216	248	17153	125.1	130.2	127.6
80	203	246	16121	116.2	120.9	118.6
75	190	243	15088	107.5	111.8	109.6
70	178	241	14136	99.7	103.7	101.7
65	165	238	13103	91.4	95.0	93.2
60	152	235	12071	83.3	86.6	84.9
55	140	232	11118	76.1	79.1	77.6
50	127	229	10085	68.4	71.1	69.8
45	114	225	9053	60.9	63.3	62.1
40	102	221	8100	54.2	56.2	55.2
35	89	216	7068	46.8	48.8	47.8
30	76	210	6035	39.8	41.2	40.5
25	63	203	5003	32.8	34.1	33.4
20	51	195	4050	26.6	27.6	27.1
15	38	184	3018	20.1	20.8	20.5
10	25	169	1985	13.7	14.1	13.9
9	23	166	1826	12.7	13.1	12.9

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31G08NB EAN: 4069025150660	LP number 59538_88
--	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	20170.0	155.5
5.0	20170.0	151.3
15.0	20170.0	153.0