

## Photometric test report

Family  
Streetlight 21 midi LED

Order number: 5XE3U31D08MB  
EAN: 4069025163707

LP number  
59536\_302



**Version** post-top or side-entry mounting  
**Optic** asymmetric, extremely wide distribution (P0.8a)  
**Cover** toughened safety glass  
**Lamps** LED 3000 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 19670 lm  
 Power consumption = 146.7 W  
 Luminous efficacy = 134.1 lm/W

serial  
documentation  
18.01.2024

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 879 cd/klm

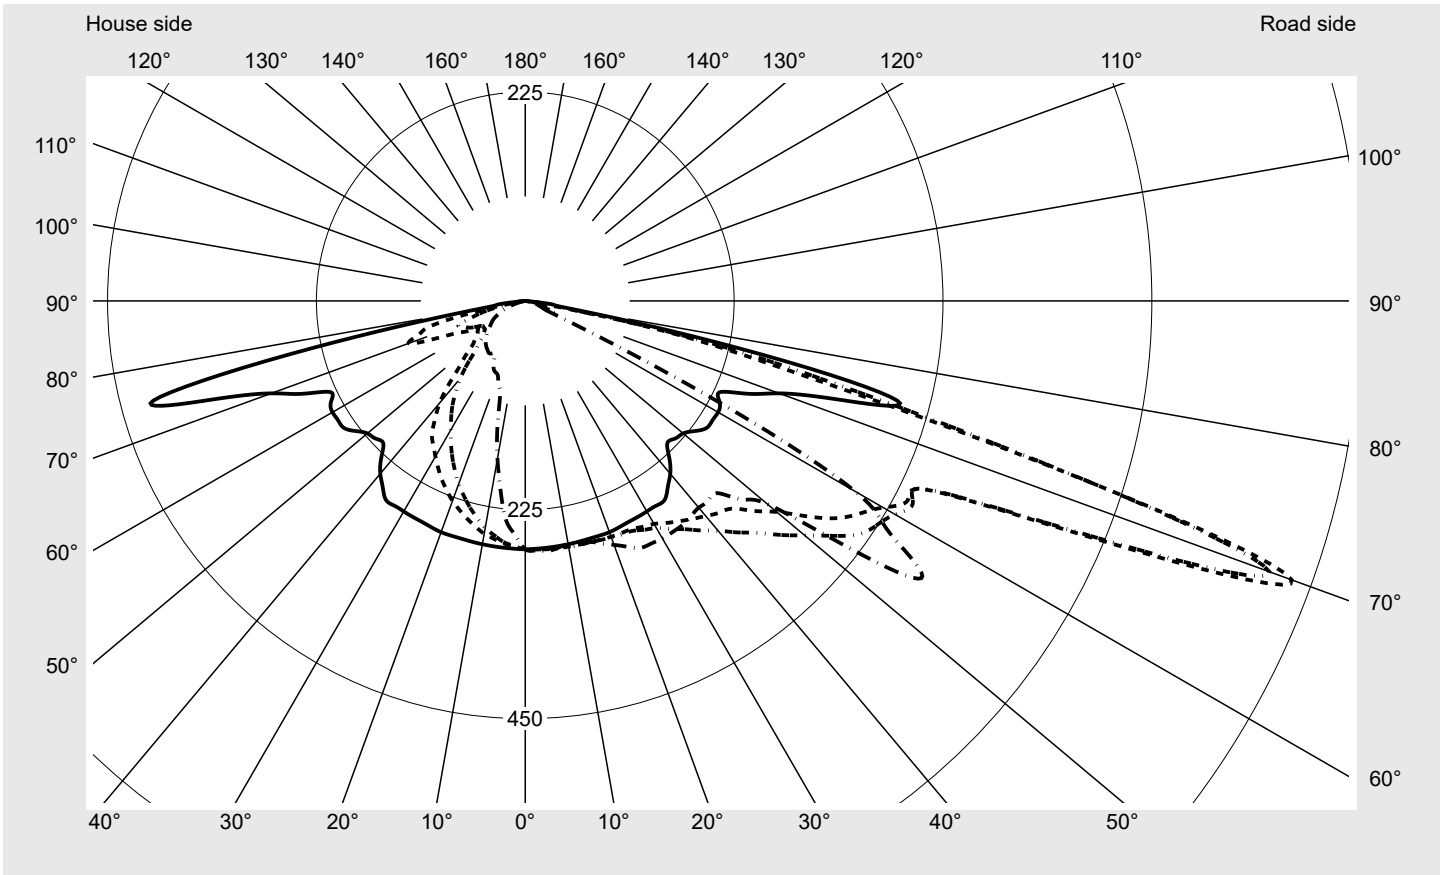

#### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

#### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	878.7
Imax 80°	57.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


#### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> 59536_302
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

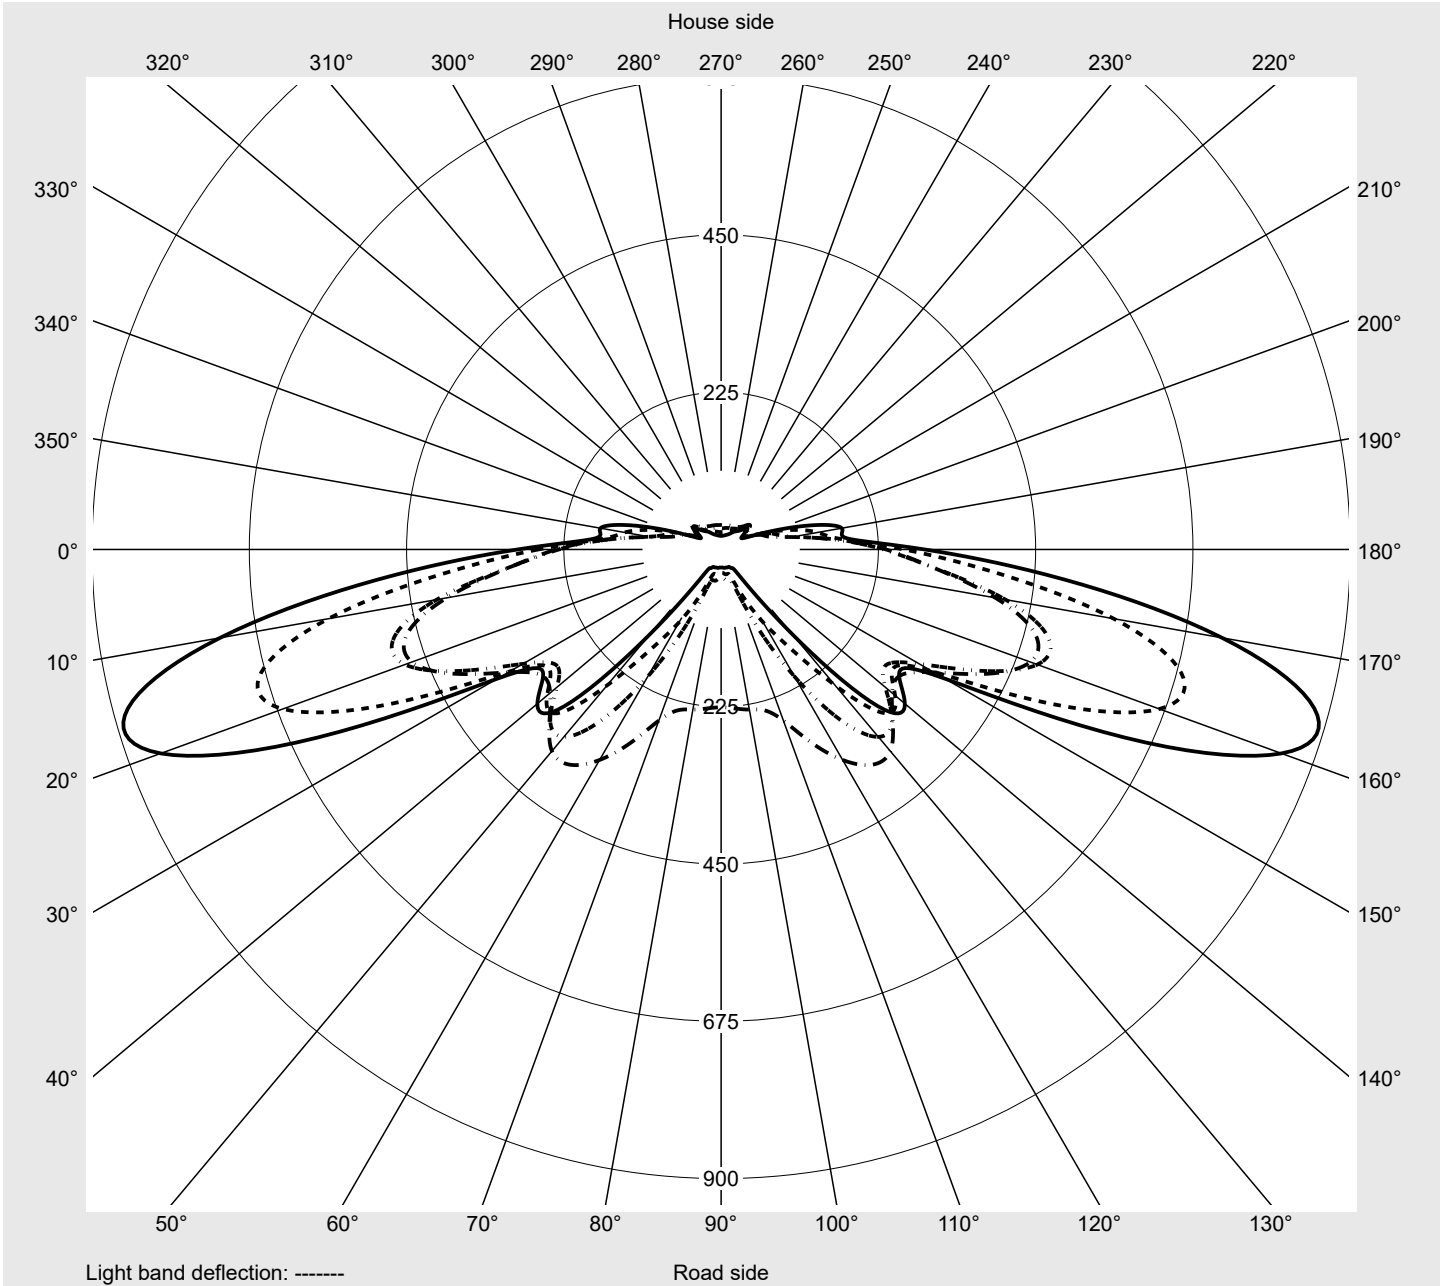

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> <b>59536_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	267.2	267.2	267.4	267.7	268.0	268.2	268.3	268.4	268.7	268.6	268.6	268.7	268.7
5,0°	266.9	266.9	267.2	267.8	268.6	268.9	269.1	269.3	269.8	269.6	269.6	269.8	269.9
7,5°	266.5	266.7	267.4	268.3	269.0	269.1	269.0	269.1	269.2	269.0	268.6	268.3	268.2
10,0°	266.2	266.6	267.5	268.8	269.4	269.4	269.0	268.9	268.7	268.3	267.5	266.8	266.5
12,5°	265.7	266.8	267.7	268.9	269.3	269.2	268.7	268.4	268.0	267.7	267.2	266.8	266.7
15,0°	265.2	267.0	267.9	269.1	269.2	269.1	268.3	267.9	267.3	267.0	266.9	266.8	267.0
17,5°	265.2	267.9	268.8	269.7	270.1	270.0	269.8	269.8	269.9	270.4	270.8	271.1	271.6
20,0°	265.1	268.9	269.6	270.3	271.0	270.8	271.2	271.7	272.4	273.8	274.7	275.4	276.3
22,5°	264.0	268.4	269.8	270.7	272.2	273.3	274.8	276.9	278.7	280.6	282.2	283.8	285.0
25,0°	262.8	268.0	269.9	271.2	273.4	275.7	278.4	282.1	285.0	287.4	289.7	292.2	293.7
27,5°	262.3	269.0	271.7	274.3	277.9	281.8	286.1	291.1	295.3	299.0	301.4	302.9	302.7
30,0°	261.9	269.9	273.5	277.4	282.5	287.8	293.9	300.0	305.5	310.6	313.1	313.5	311.7
32,5°	261.8	271.7	277.3	283.5	291.4	299.5	307.7	315.0	321.0	325.6	326.4	323.2	318.0
35,0°	261.7	273.6	281.1	289.6	300.3	311.1	321.4	329.9	336.4	340.6	339.8	332.9	324.3
37,5°	252.3	268.4	281.4	296.0	311.7	326.6	338.9	348.1	353.7	354.6	350.3	339.3	327.6
40,0°	243.0	263.2	281.8	302.4	323.1	342.1	356.4	366.4	370.9	368.7	360.7	345.6	330.9
42,5°	229.8	256.4	281.5	309.4	338.2	363.9	378.3	385.7	385.6	377.9	365.2	348.0	332.0
45,0°	216.5	249.6	281.2	316.3	353.3	385.7	400.3	405.0	400.3	387.0	369.7	350.4	333.1
47,5°	219.3	258.6	295.9	335.0	373.2	403.4	416.6	415.9	404.4	385.7	366.0	350.2	338.2
50,0°	222.0	267.6	310.6	353.7	393.0	421.0	433.0	426.9	408.5	384.3	362.2	350.0	343.3
52,5°	230.3	281.2	331.6	380.9	415.7	432.1	429.8	415.1	391.8	372.1	363.5	370.8	388.4
55,0°	238.5	294.7	352.7	408.1	438.3	443.1	426.6	403.4	375.0	359.8	364.8	391.6	433.4
57,5°	239.2	300.2	368.4	426.7	449.2	436.9	401.3	371.3	353.4	354.2	384.0	423.0	459.6
60,0°	239.9	305.7	384.0	445.2	460.1	430.6	376.1	339.2	331.9	348.6	403.2	454.3	485.7
62,5°	236.0	306.5	398.6	464.7	470.8	420.8	351.7	313.7	319.3	347.2	376.6	376.0	347.7
65,0°	232.2	307.3	413.1	484.1	481.4	410.9	327.3	288.2	306.7	345.7	350.0	297.8	209.7
67,5°	261.7	400.0	570.4	681.4	667.3	523.6	348.4	299.5	324.9	331.4	253.7	172.7	120.4
70,0°	291.2	492.6	727.8	878.7	853.1	636.3	369.5	310.8	343.1	317.0	157.5	47.7	31.0
72,5°	353.0	430.5	526.3	594.6	600.5	549.8	505.8	527.8	350.6	186.2	90.1	34.6	25.1
75,0°	414.8	368.5	324.8	310.5	347.9	463.4	642.1	744.8	358.1	55.4	22.7	21.6	19.3
77,5°	236.0	205.6	178.8	168.2	183.7	239.0	334.0	387.5	184.9	33.3	17.6	16.7	14.7
80,0°	57.3	42.7	32.7	25.9	19.4	14.6	25.9	30.2	11.7	11.3	12.5	11.9	10.0
82,5°	30.0	22.6	17.5	14.0	10.7	8.3	13.9	16.1	6.8	6.6	7.4	7.1	6.4
85,0°	2.7	2.5	2.3	2.2	2.1	2.0	2.0	2.0	2.0	2.0	2.3	2.4	2.7
87,5°	1.4	1.3	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> <b>59536_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	268.8	268.7	268.8	268.9	268.9	269.0	266.5	265.7	264.9	264.3	263.2	262.1	260.9
5,0°	270.0	269.8	270.0	270.2	270.3	270.5	265.5	264.0	262.3	261.0	259.0	256.8	254.3
7,5°	268.1	268.0	267.8	268.0	268.1	268.3	264.6	261.7	258.5	254.8	250.1	245.2	240.0
10,0°	266.2	266.2	265.6	265.7	265.9	266.2	263.7	259.4	254.8	248.5	241.2	233.7	225.8
12,5°	266.6	266.7	266.6	266.8	267.1	267.4	262.2	256.2	248.7	239.4	229.0	218.0	206.6
15,0°	267.0	267.3	267.5	267.9	268.3	268.7	260.7	253.0	242.7	230.3	216.7	202.2	187.3
17,5°	271.9	272.4	272.7	273.3	273.7	274.2	260.0	249.6	236.0	220.1	202.7	184.7	166.5
20,0°	276.9	277.5	277.9	278.7	279.1	279.7	259.3	246.2	229.2	209.9	188.8	167.2	145.7
22,5°	285.7	286.0	285.3	285.9	286.0	286.6	256.1	240.7	220.9	197.9	173.1	148.9	124.7
25,0°	294.5	294.4	292.7	293.2	293.0	293.5	253.0	235.1	212.5	186.0	157.4	130.7	103.7
27,5°	301.7	299.6	296.6	295.1	294.3	294.5	249.8	229.0	203.1	173.2	142.1	112.9	90.5
30,0°	308.9	304.7	300.5	297.1	295.6	295.6	246.5	222.9	193.6	160.4	126.8	95.2	77.3
32,5°	313.0	307.3	302.0	297.5	295.4	295.3	243.8	216.9	184.3	148.5	113.2	85.2	75.5
35,0°	317.0	310.0	303.6	298.0	295.1	294.9	241.1	211.0	175.1	136.5	99.5	75.1	73.7
37,5°	317.8	309.7	303.3	296.8	293.1	292.9	227.5	194.9	159.3	122.5	89.6	70.6	71.2
40,0°	318.5	309.4	303.1	295.7	291.1	290.8	213.8	178.8	143.5	108.6	79.7	66.1	68.6
42,5°	318.9	309.7	303.7	297.1	292.4	291.8	194.6	156.5	121.9	92.6	71.9	63.8	66.0
45,0°	319.2	310.1	304.3	298.5	293.8	292.9	175.4	134.2	100.3	76.6	64.1	61.5	63.3
47,5°	329.8	326.0	323.9	321.0	317.3	316.6	170.5	122.9	87.3	67.9	61.3	60.6	62.1
50,0°	340.3	341.9	343.4	343.5	340.8	340.4	165.5	111.6	74.4	59.3	58.4	59.8	60.9
52,5°	405.0	419.9	430.4	434.7	431.6	430.6	167.0	108.2	68.4	56.2	56.5	57.5	57.6
55,0°	469.7	498.0	517.3	525.9	522.3	520.8	168.4	104.8	62.4	53.0	54.6	55.3	54.3
57,5°	478.3	480.2	474.1	472.9	468.6	465.7	167.5	102.3	61.0	53.3	50.4	50.0	50.6
60,0°	486.8	462.4	430.8	419.9	414.9	410.5	166.7	99.7	59.6	53.6	46.2	44.6	46.9
62,5°	304.6	260.5	238.2	232.6	228.3	225.8	164.6	102.3	71.0	60.8	46.8	42.1	46.4
65,0°	122.3	58.5	45.5	45.3	41.7	41.1	162.5	104.9	82.5	68.0	47.5	39.6	45.8
67,5°	75.0	42.9	36.1	36.0	33.8	33.5	171.9	140.1	107.9	72.2	44.8	36.5	43.4
70,0°	27.6	27.3	26.7	26.8	26.0	25.9	181.3	175.3	133.4	76.4	42.1	33.3	41.1
72,5°	22.7	22.0	21.3	21.1	20.5	20.3	265.1	189.7	120.0	62.2	33.7	27.5	35.0
75,0°	17.7	16.6	15.9	15.3	15.0	14.8	348.9	204.0	106.7	47.9	25.3	21.8	29.0
77,5°	13.1	12.5	11.5	11.1	10.8	10.6	193.6	113.1	59.4	29.8	17.4	15.8	20.3
80,0°	8.4	8.3	7.2	6.9	6.6	6.5	38.3	22.1	12.2	11.8	9.4	9.8	11.6
82,5°	5.4	5.2	4.5	4.3	4.1	4.0	20.5	12.5	7.6	7.4	6.0	6.3	7.0
85,0°	2.3	2.1	1.8	1.7	1.6	1.5	2.8	2.8	2.9	2.9	2.7	2.7	2.5
87,5°	1.1	1.0	0.9	0.8	0.8	0.7	1.4	1.4	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> <b>59536_302</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	0.4	0.4
2,5°	259.6	258.4	257.3	256.2	255.1	254.3	253.6	253.0	252.6	252.4	252.3	3.2	3.6
5,0°	251.7	249.4	247.1	244.9	242.7	241.1	239.8	238.5	237.7	237.3	237.2	6.2	9.8
7,5°	234.8	230.1	225.2	220.5	216.3	213.0	210.1	207.9	206.2	205.4	204.8	9.0	18.7
10,0°	217.9	210.8	203.4	196.1	189.9	184.8	180.4	177.3	174.8	173.4	172.5	11.5	30.2
12,5°	195.6	185.0	175.2	166.1	158.0	151.4	146.3	142.8	140.4	139.1	138.4	13.6	43.8
15,0°	173.3	159.2	147.1	136.1	126.1	118.1	112.2	108.3	106.0	104.7	104.3	15.5	59.4
17,5°	149.3	133.3	121.0	111.9	105.2	100.8	98.1	96.7	95.8	95.3	95.2	17.6	76.9
20,0°	125.4	107.5	94.9	87.6	84.4	83.5	84.0	85.2	85.7	85.9	86.1	19.5	96.4
22,5°	105.4	93.2	87.8	86.3	86.0	85.8	85.4	85.1	84.3	83.6	83.3	21.7	118.1
25,0°	85.5	78.9	80.6	84.9	87.6	88.0	86.8	84.9	82.9	81.2	80.5	23.8	141.9
27,5°	81.2	81.9	85.3	88.0	88.0	85.8	82.5	79.3	76.2	74.0	73.1	26.1	168.0
30,0°	77.0	84.8	90.0	91.2	88.3	83.6	78.3	73.6	69.6	66.7	65.7	28.2	196.2
32,5°	79.1	85.7	88.8	87.8	84.1	79.6	75.2	71.9	69.4	67.7	67.1	30.6	226.8
35,0°	81.2	86.7	87.6	84.5	79.9	75.6	72.2	70.2	69.3	68.6	68.4	32.9	259.7
37,5°	76.3	79.2	78.9	77.1	76.1	74.0	71.1	69.2	67.9	67.1	66.7	34.9	294.6
40,0°	71.3	71.6	70.3	69.7	72.4	72.5	70.0	68.2	66.6	65.5	65.1	36.8	331.3
42,5°	67.4	67.5	68.8	69.1	68.9	68.5	66.8	65.5	64.3	63.3	62.9	38.5	369.8
45,0°	63.5	63.4	67.3	68.6	65.4	64.6	63.6	62.8	62.0	61.1	60.7	40.2	410.1
47,5°	62.2	64.8	65.8	64.2	61.6	61.0	60.1	59.3	58.4	57.5	57.2	42.8	452.8
50,0°	60.9	66.1	64.2	59.8	57.9	57.4	56.6	55.8	54.8	53.9	53.6	45.3	498.1
52,5°	59.8	63.6	59.5	55.6	53.9	53.3	52.6	51.7	50.6	49.9	49.7	50.1	548.1
55,0°	58.6	61.0	54.8	51.4	50.0	49.2	48.5	47.6	46.5	45.9	45.9	55.0	603.1
57,5°	57.5	56.2	50.1	47.2	46.0	45.1	44.4	43.8	43.2	42.8	42.8	55.3	658.4
60,0°	56.4	51.4	45.4	43.1	42.0	41.0	40.4	40.0	39.8	39.7	39.6	55.4	713.8
62,5°	54.0	47.8	42.0	39.7	38.3	37.1	36.5	36.0	35.5	35.1	35.0	47.7	761.5
65,0°	51.6	44.2	38.6	36.3	34.6	33.2	32.5	31.9	31.2	30.5	30.5	39.5	800.9
67,5°	48.3	41.4	36.3	33.4	30.6	28.5	27.4	26.5	25.7	25.0	24.9	43.3	844.2
70,0°	45.1	38.6	34.0	30.6	26.6	23.9	22.2	21.1	20.1	19.6	19.4	47.1	891.3
72,5°	38.7	34.3	30.3	25.9	21.5	18.5	16.7	15.5	14.5	14.0	13.8	42.6	933.9
75,0°	32.4	30.0	26.6	21.3	16.4	13.1	11.3	10.0	9.0	8.3	8.1	37.9	971.7
77,5°	22.7	22.3	20.0	15.8	11.7	9.2	7.7	6.6	5.6	4.9	4.7	21.1	992.8
80,0°	13.0	14.5	13.5	10.3	7.0	5.2	4.2	3.1	2.2	1.5	1.3	4.0	996.9
82,5°	7.7	8.3	7.6	6.0	4.2	3.2	2.6	2.0	1.5	1.0	0.9	2.3	999.2
85,0°	2.3	2.1	1.8	1.7	1.5	1.3	1.0	0.8	0.7	0.6	0.6	0.6	999.7
87,5°	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> 59536_302
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19670	146.7	161.2	154.0
95	241	252	18663	135.9	149.3	142.6
90	229	250	17734	126.6	138.9	132.8
85	216	248	16727	117.1	128.4	122.8
80	203	246	15721	107.9	118.3	113.1
75	190	243	14714	99.3	108.6	104.0
70	178	241	13784	91.5	100.1	95.8
65	165	238	12778	83.4	91.3	87.4
60	152	235	11771	75.7	82.7	79.2
55	140	232	10842	68.9	75.2	72.1
50	127	229	9835	61.7	67.3	64.5
45	114	225	8828	54.7	59.6	57.2
40	102	221	7899	48.3	52.8	50.6
35	89	216	6892	41.7	45.4	43.6
30	76	210	5886	35.3	38.5	36.9
25	63	203	4879	29.2	31.7	30.4
20	51	195	3949	23.8	25.8	24.8
15	38	184	2943	18.1	19.5	18.8
11	27	172	2091	13.3	14.3	13.8

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19670	141.2	147.7	144.4
95	241	252	18664	131.5	137.4	134.4
90	229	250	17734	123.1	128.5	125.8
85	216	248	16728	114.1	119.2	116.6
80	203	246	15721	105.6	110.2	107.9
75	190	243	14714	97.3	101.6	99.4
70	178	241	13785	90.1	94.0	92.0
65	165	238	12778	82.4	85.9	84.2
60	152	235	11771	74.9	78.1	76.5
55	140	232	10842	68.2	71.2	69.7
50	127	229	9835	61.2	63.8	62.5
45	114	225	8828	54.4	56.7	55.6
40	102	221	7899	48.1	50.3	49.2
35	89	216	6892	41.6	43.4	42.5
30	76	210	5886	35.3	36.8	36.0
25	63	203	4879	29.3	30.4	29.8
20	51	195	3950	23.9	24.7	24.3
15	38	184	2943	18.2	18.8	18.5
11	27	172	2091	13.4	13.9	13.6

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> <b>59536_302</b>
--	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19670	143.5	152.2	147.8
95	241	252	18663	133.4	141.3	137.4
90	229	250	17733	124.6	131.9	128.2
85	216	248	16727	115.4	122.2	118.8
80	203	246	15720	106.6	112.7	109.6
75	191	244	14791	98.8	104.5	101.6
70	178	241	13784	90.7	95.8	93.2
65	165	238	12777	82.8	87.5	85.2
60	152	235	11771	75.2	79.5	77.4
55	140	232	10841	68.5	72.3	70.4
50	127	229	9835	61.4	64.8	63.1
45	114	225	8828	54.5	57.5	56.0
40	102	221	7899	48.2	50.9	49.6
35	89	216	6892	41.6	43.9	42.8
30	76	210	5885	35.3	37.2	36.2
25	64	204	4956	29.6	31.2	30.4
20	51	195	3949	23.8	24.9	24.4
15	38	184	2943	18.1	18.9	18.5
11	27	172	2091	13.4	14.0	13.7

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3U31D08MB</b> <b>EAN: 4069025163707</b>	<b>LP number</b> 59536_302
--	--	-------------------------------

**Luminousfluxs table** **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	19670.0	146.7
5.0	19670.0	141.2
15.0	19670.0	143.5