
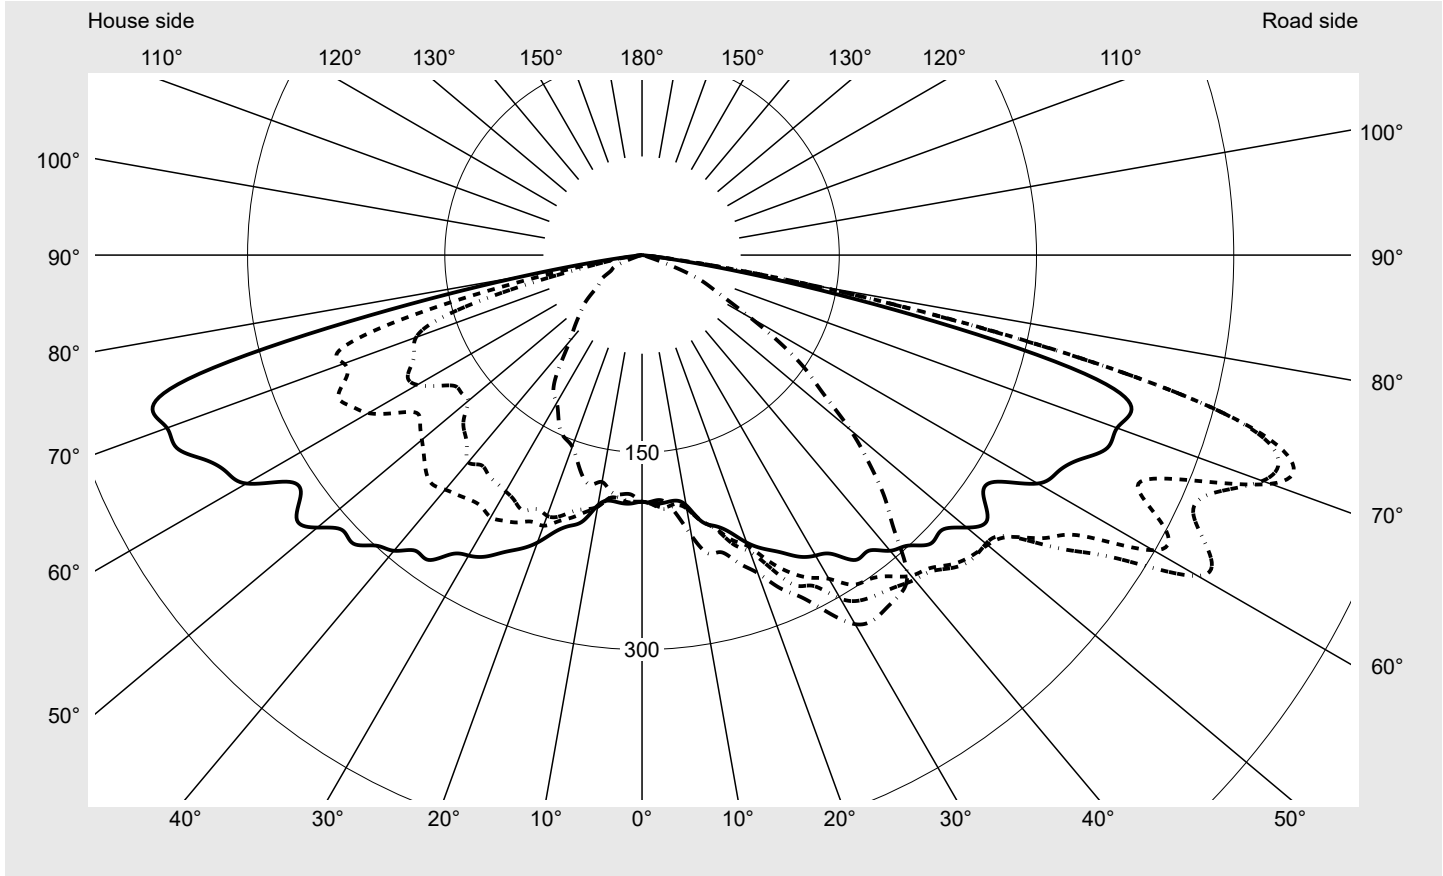


# Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> <b>59599_96</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, extremely wide distribution with an additional rear light component (ST1.0ST0.5) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ - DALI2 <b>Rated values</b> Net luminous flux = 9460 lm Power consumption = 63.0 W Luminous efficacy = 150.2 lm/W	<b>serial documentation</b> <b>23.05.2024</b>



**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 517 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G2
Imax 70°	508.6
Imax 80°	129.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> 59599_96
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**      **siteco**

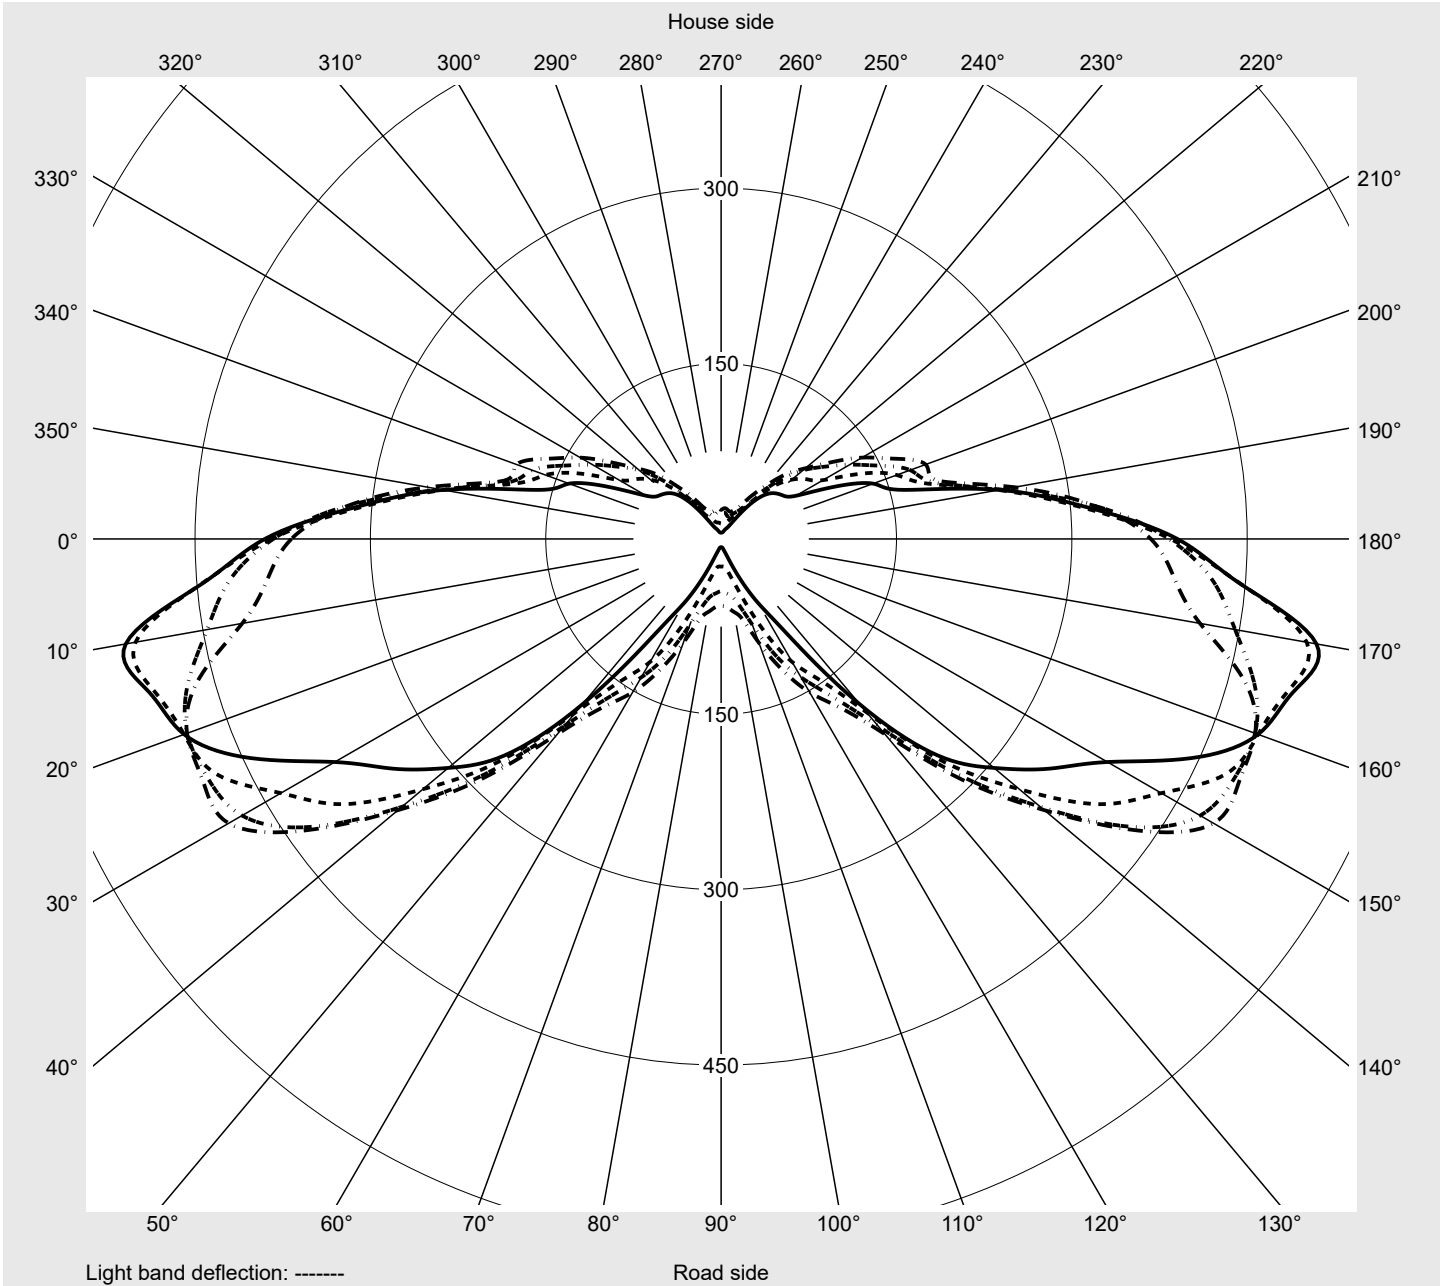

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> 59599_96
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6
2,5°	189.1	189.4	189.7	190.1	190.6	191.4	191.4	191.4	191.2	190.9	190.8	190.8	189.9
5,0°	189.1	190.9	192.7	193.8	194.6	195.1	196.0	196.0	196.2	196.1	195.3	193.9	192.8
7,5°	188.4	189.1	190.9	192.0	194.2	196.1	198.2	199.3	198.6	197.2	196.0	195.1	195.6
10,0°	193.1	192.8	194.5	195.7	197.5	199.0	200.7	202.6	203.2	204.5	205.9	206.4	207.3
12,5°	207.1	207.4	206.8	207.0	205.9	204.9	207.6	210.5	213.4	215.9	219.6	221.3	221.0
15,0°	213.2	213.9	215.1	215.3	215.4	216.8	218.3	219.3	221.4	225.0	230.3	233.5	234.7
17,5°	220.8	224.4	227.0	230.5	232.0	233.3	233.1	232.6	231.8	228.7	228.6	234.0	239.3
20,0°	232.7	235.4	235.6	240.2	246.3	248.1	251.0	253.1	250.8	248.0	243.6	243.0	247.2
22,5°	241.8	247.8	251.9	258.6	265.4	268.3	270.2	273.5	273.0	264.4	258.2	259.1	261.4
25,0°	249.4	257.8	266.3	277.3	286.2	290.8	292.6	292.4	289.3	277.1	271.6	273.5	274.2
27,5°	258.6	266.8	276.6	283.8	292.5	300.8	307.3	304.9	298.9	289.9	285.1	281.1	285.8
30,0°	263.8	274.9	284.3	301.7	306.4	311.5	316.4	315.8	311.5	304.2	298.8	295.6	299.7
32,5°	269.6	282.6	297.2	311.1	315.1	325.5	329.9	326.4	325.7	322.3	315.2	311.0	314.7
35,0°	283.0	289.9	301.0	314.5	321.6	329.2	324.5	326.1	326.3	323.5	321.5	317.6	319.1
37,5°	283.4	295.2	307.9	317.8	322.2	328.6	331.2	331.2	328.9	322.7	321.3	313.9	314.8
40,0°	293.5	307.9	318.4	322.3	325.9	332.8	335.7	330.0	329.4	320.2	313.8	310.8	307.8
42,5°	299.7	306.0	323.2	326.0	334.2	341.9	344.5	337.5	327.4	320.8	316.4	311.8	304.4
45,0°	310.4	313.5	332.7	335.9	335.6	345.9	346.1	341.0	334.2	328.8	313.5	298.6	291.8
47,5°	309.4	320.3	339.1	341.3	346.5	357.8	355.3	341.7	336.1	332.7	308.7	279.5	276.5
50,0°	322.4	339.4	343.0	341.5	341.7	354.3	359.8	353.8	335.4	319.9	297.5	273.2	254.5
52,5°	330.8	344.2	352.1	351.2	348.1	359.1	364.3	343.3	324.0	303.4	275.7	247.5	227.2
55,0°	316.8	346.8	375.0	389.5	383.4	376.6	380.4	360.5	332.6	291.1	245.8	224.1	204.6
57,5°	320.7	355.6	397.6	429.8	426.5	416.9	401.5	378.0	334.6	280.5	235.8	208.0	191.6
60,0°	347.4	395.1	448.9	488.1	481.1	459.2	428.0	390.9	339.9	275.8	235.1	206.7	182.0
62,5°	356.6	405.1	447.5	485.3	498.4	483.6	459.4	419.2	348.6	287.8	229.7	195.1	165.7
65,0°	367.6	389.3	415.9	462.5	486.1	489.2	486.4	434.7	360.9	290.9	218.0	175.5	151.5
67,5°	383.1	423.0	446.4	471.8	486.1	484.4	473.2	429.4	356.5	283.3	208.9	163.8	136.7
70,0°	384.5	447.0	508.6	502.2	488.9	476.2	434.8	395.5	332.9	269.7	193.5	147.4	121.4
72,5°	390.3	446.6	517.1	506.5	488.8	443.6	381.6	342.6	304.7	261.8	184.8	101.2	63.2
75,0°	348.3	408.5	449.2	449.2	425.3	358.9	292.4	272.0	244.8	171.5	82.2	30.3	13.1
77,5°	212.3	272.5	293.1	290.5	265.5	234.8	198.2	156.8	93.2	36.0	12.3	5.4	4.9
80,0°	88.8	115.3	129.6	128.3	113.9	98.6	71.2	32.4	10.0	5.0	4.8	4.4	4.0
82,5°	18.0	22.3	25.1	28.5	29.7	20.8	8.6	2.9	3.0	3.1	3.2	3.2	3.0
85,0°	1.5	1.4	1.3	1.3	1.3	1.2	1.0	1.0	1.0	1.0	1.2	1.5	1.6
87,5°	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5	0.5	0.5	0.4	0.4	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> <b>59599_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6
2,5°	189.2	188.2	188.3	188.0	187.9	187.3	188.7	188.5	187.5	186.7	186.8	185.8	185.5
5,0°	191.5	190.3	188.9	187.9	188.1	187.7	188.3	186.6	185.7	185.6	184.8	184.5	184.2
7,5°	196.3	196.3	197.0	197.6	197.9	198.3	187.4	186.2	186.0	185.8	185.3	185.1	184.1
10,0°	208.2	209.6	212.5	214.2	216.3	216.7	193.6	194.4	194.1	193.0	190.7	188.8	186.7
12,5°	221.3	222.9	223.4	227.2	230.8	232.3	204.2	200.3	197.9	195.0	193.3	191.6	190.1
15,0°	236.0	235.5	235.7	236.1	234.6	234.0	211.2	206.7	201.6	197.6	194.8	191.1	187.8
17,5°	242.2	243.1	245.4	246.3	246.0	245.8	217.2	212.3	208.3	202.7	195.6	190.9	187.1
20,0°	252.1	256.1	259.5	258.7	255.8	257.3	226.2	219.0	211.0	203.1	196.5	191.2	186.5
22,5°	266.1	271.5	276.3	276.2	275.1	274.1	229.2	219.4	209.0	200.7	195.1	188.5	181.6
25,0°	280.3	283.3	286.0	287.6	287.1	287.2	235.2	224.3	214.1	200.3	190.1	181.8	176.5
27,5°	290.3	294.9	299.3	304.4	309.3	306.4	243.4	227.7	210.3	195.1	186.9	177.4	168.2
30,0°	301.5	305.0	313.5	320.4	325.3	324.1	247.2	230.2	207.5	192.7	181.8	170.5	160.1
32,5°	315.4	313.3	321.2	331.9	331.4	328.6	252.1	227.1	205.6	190.3	177.7	166.0	157.3
35,0°	321.7	321.5	324.9	334.5	333.3	326.2	256.9	227.4	203.9	185.4	172.9	162.7	154.1
37,5°	317.8	320.7	327.1	328.9	327.0	323.8	257.5	230.0	201.2	181.9	167.3	158.7	151.9
40,0°	307.3	310.5	312.3	313.0	311.4	313.2	259.2	232.9	205.7	182.2	167.4	156.0	145.4
42,5°	305.4	303.1	291.1	288.4	285.4	284.0	267.7	236.2	197.2	174.9	162.2	148.5	139.8
45,0°	290.8	284.4	277.0	272.8	265.0	261.1	275.9	232.4	190.8	167.2	159.5	146.7	134.0
47,5°	270.6	255.9	246.6	242.7	234.4	234.3	272.0	225.0	183.7	166.1	158.9	145.7	131.9
50,0°	241.3	228.6	222.0	212.9	205.7	206.8	273.0	218.6	172.5	164.5	157.6	142.5	128.6
52,5°	214.3	205.4	196.5	180.2	174.2	174.7	269.4	212.7	172.7	162.4	153.3	140.9	125.8
55,0°	190.7	179.3	168.0	149.3	147.3	152.3	261.5	209.3	173.7	162.6	152.1	138.5	125.9
57,5°	172.4	150.1	133.4	126.9	123.7	124.8	270.7	223.7	185.2	166.8	152.0	136.9	120.4
60,0°	153.5	126.7	108.7	103.7	98.3	95.0	283.7	240.3	197.4	180.7	159.1	141.2	120.8
62,5°	137.5	108.9	90.1	82.0	74.6	71.9	301.0	249.2	200.9	188.4	164.4	142.9	116.9
65,0°	123.3	94.4	71.3	63.4	58.7	57.3	321.5	254.8	192.5	186.2	162.5	139.1	114.1
67,5°	109.4	78.0	58.2	49.5	46.5	44.6	321.8	243.5	187.7	172.1	148.4	127.0	107.7
70,0°	86.9	53.4	34.8	26.2	23.6	23.7	309.9	241.2	182.8	159.9	132.1	100.7	89.1
72,5°	35.7	17.6	10.9	8.0	7.2	7.0	313.4	241.5	162.1	138.4	104.7	73.8	64.8
75,0°	6.0	5.1	4.6	4.2	3.8	3.6	256.9	189.9	109.6	95.2	79.3	59.6	52.0
77,5°	4.5	4.1	3.8	3.4	3.0	2.9	160.2	101.0	50.6	48.8	49.7	40.8	30.9
80,0°	3.6	3.2	2.9	2.5	2.2	2.1	62.6	36.5	23.8	23.4	21.7	16.7	10.2
82,5°	2.8	2.5	2.0	1.7	1.5	1.4	12.4	8.0	6.0	5.5	4.8	3.3	2.6
85,0°	1.6	1.5	1.2	0.9	0.7	0.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3
87,5°	0.3	0.3	0.3	0.3	0.1	0.1	0.8	0.8	0.8	0.8	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> <b>59599_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	0.3	0.3
2,5°	184.9	184.3	182.8	182.5	182.9	182.3	182.0	181.5	181.6	182.2	182.4	2.2	2.5
5,0°	183.4	182.4	182.6	182.3	182.0	182.0	181.9	182.3	183.4	183.0	182.7	4.5	7.0
7,5°	183.2	183.3	182.2	181.8	180.9	180.2	180.5	181.0	181.4	182.1	181.4	6.8	13.8
10,0°	185.3	184.9	185.3	185.6	184.5	183.8	182.3	181.0	177.2	176.3	175.2	9.3	23.1
12,5°	188.2	185.6	184.4	184.6	183.6	182.2	180.8	179.6	179.7	179.1	178.8	12.0	35.1
15,0°	185.3	183.5	181.4	179.6	177.4	176.4	174.6	174.8	175.5	174.7	174.3	14.6	49.7
17,5°	183.8	180.2	176.7	173.6	171.5	169.0	166.5	166.3	166.5	165.1	163.9	17.3	67.0
20,0°	180.6	178.8	175.2	170.8	168.8	166.9	163.2	159.9	157.7	156.3	155.1	20.2	87.3
22,5°	176.9	171.7	169.0	166.0	163.9	160.2	158.0	157.1	154.5	152.5	151.4	23.4	110.7
25,0°	170.6	165.6	162.3	159.6	155.4	151.0	148.8	147.9	146.3	146.6	147.0	26.4	137.1
27,5°	163.4	161.2	157.4	153.8	147.7	143.4	140.5	139.9	140.0	137.8	137.9	29.3	166.5
30,0°	154.1	152.3	148.7	142.7	139.5	137.0	135.7	134.0	130.7	129.5	129.7	32.3	198.7
32,5°	150.3	145.6	140.8	135.7	132.8	128.2	124.1	122.4	122.0	123.1	125.2	35.1	233.8
35,0°	146.1	139.9	132.0	126.7	124.1	117.4	111.6	108.6	111.6	114.0	115.1	37.3	271.2
37,5°	141.8	135.1	127.6	120.4	113.6	108.7	105.6	101.3	99.1	99.0	99.1	39.2	310.4
40,0°	137.6	128.7	120.7	111.5	103.5	97.6	94.8	92.9	90.7	87.5	85.6	40.7	351.1
42,5°	130.8	122.7	110.3	103.5	96.6	90.8	86.7	83.7	81.0	78.3	77.1	42.0	393.1
45,0°	126.1	116.1	105.3	96.9	91.3	82.7	80.4	79.2	72.3	68.9	69.6	43.1	436.2
47,5°	118.5	108.0	98.7	89.8	80.1	73.5	71.3	68.3	63.3	60.6	62.9	43.6	479.7
50,0°	116.2	101.3	90.2	84.0	75.4	67.5	63.3	60.4	56.9	55.5	56.8	43.8	523.5
52,5°	113.1	96.2	82.5	75.1	69.1	62.2	55.8	52.4	50.7	49.4	48.5	43.5	567.0
55,0°	109.5	89.8	77.7	67.8	61.2	55.6	49.4	45.7	42.9	41.5	41.1	43.8	610.8
57,5°	105.8	88.0	75.5	61.7	53.6	48.0	42.9	40.0	38.9	38.8	38.3	45.0	655.9
60,0°	104.3	88.1	72.7	56.3	46.8	39.5	36.6	34.8	33.9	34.0	34.7	47.5	703.4
62,5°	97.7	83.9	68.4	53.1	39.0	33.0	30.5	30.0	29.6	28.6	27.7	48.5	751.9
65,0°	94.0	78.2	59.3	44.6	32.3	27.4	24.9	24.9	26.2	26.2	24.9	48.2	800.1
67,5°	91.3	71.2	50.3	33.6	26.9	23.6	20.7	20.3	22.2	22.5	21.6	47.9	848.0
70,0°	78.9	64.3	44.4	28.0	21.7	19.1	16.1	14.6	14.2	13.7	13.2	46.3	894.4
72,5°	60.7	53.7	39.3	20.5	12.0	9.6	7.8	6.3	5.7	5.4	5.3	42.4	936.8
75,0°	42.2	33.3	19.7	10.2	5.1	4.0	3.6	3.5	3.5	3.3	3.3	33.4	970.2
77,5°	22.1	14.1	7.8	4.9	3.3	3.0	2.8	2.6	2.6	2.5	2.4	19.7	989.9
80,0°	6.4	4.3	3.3	3.2	2.4	2.2	2.1	1.9	1.8	1.7	1.7	7.9	997.7
82,5°	2.2	1.9	1.8	1.7	1.6	1.5	1.4	1.3	1.2	1.1	1.1	1.8	999.5
85,0°	1.3	1.2	1.1	1.0	0.9	0.8	0.8	0.7	0.7	0.6	0.6	0.3	999.9
87,5°	0.6	0.6	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3J51G08ME</b> <b>EAN: 4058352991893</b>	<b>LP number</b> 59599_96
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9460	63.0	66.8	64.9
95	241	252	8976	59.4	62.9	61.2
90	229	250	8529	56.1	59.5	57.8
85	216	248	8045	52.7	55.8	54.2
80	203	246	7561	49.3	52.1	50.7
75	190	243	7076	45.9	48.5	47.2
70	178	241	6629	42.8	45.3	44.0
65	165	238	6145	39.5	41.8	40.6
60	152	235	5661	36.3	38.3	37.3
55	140	232	5214	33.3	35.2	34.2
50	127	229	4730	30.2	31.8	31.0
45	114	225	4246	27.0	28.4	27.7
40	102	221	3799	24.2	25.5	24.8
35	89	216	3315	21.2	22.4	21.8
30	76	210	2831	18.4	19.3	18.8
25	63	203	2346	15.5	16.2	15.8
20	51	195	1899	12.8	13.5	13.2
15	38	184	1415	9.9	10.4	10.2
13	33	179	1229	8.6	9.1	8.8