


# Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
	<b>Version</b> post-top- or mounting to wall arm, Smart Interface up <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 80 <b>Controlgear</b> EVG-Smart Interface <b>Rated values</b> Net luminous flux = 1470 lm Power consumption = 14.2 W Luminous efficacy = 103.5 lm/W	<b>serial documentation</b> <b>22.07.2021</b>

siteco

**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 814 cd/klm**

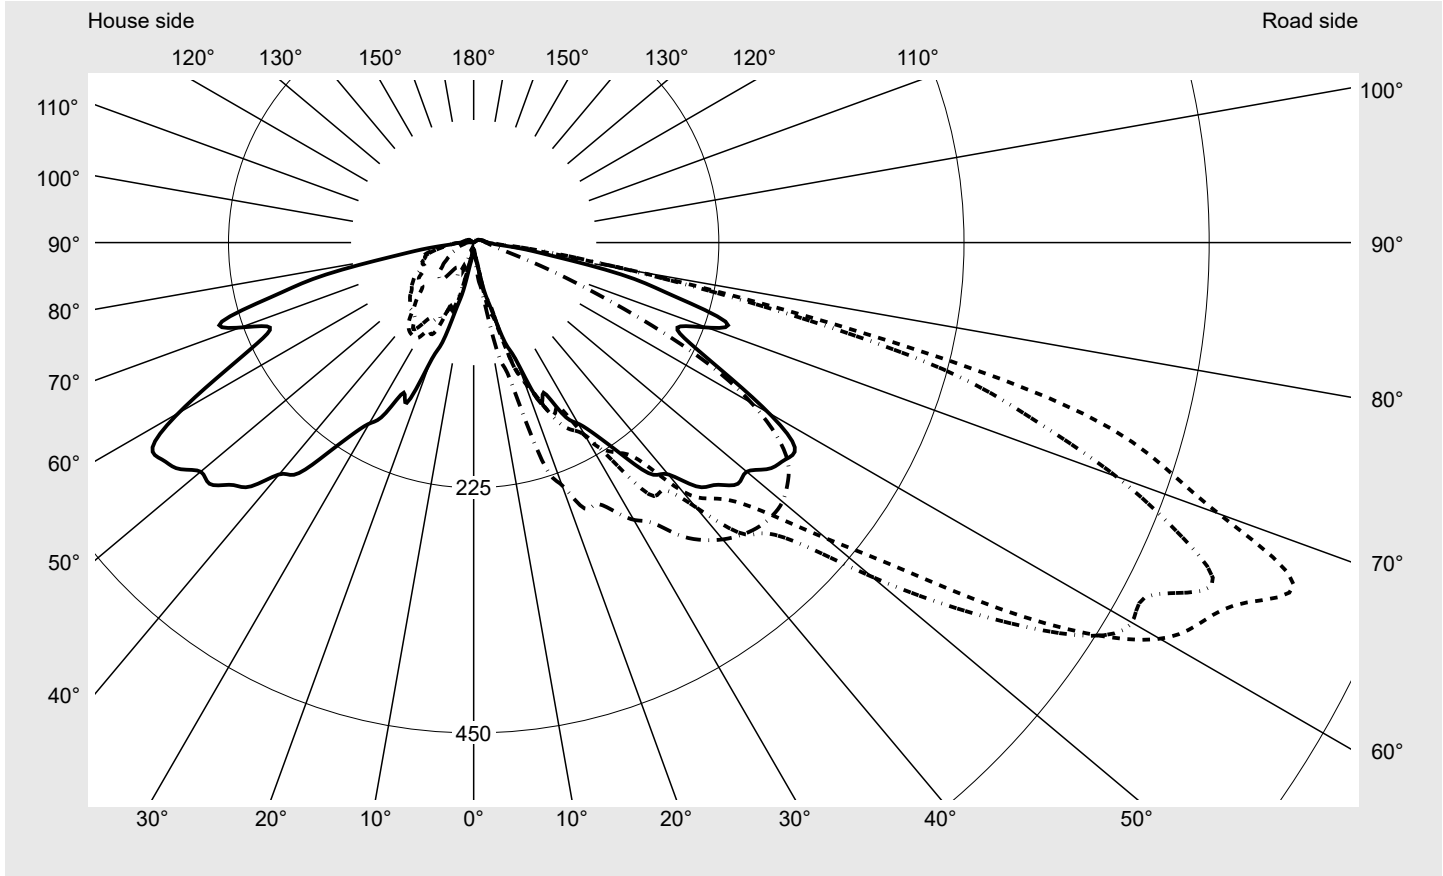

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	727.6
Imax 80°	157.2
Imax 90°	13.4
Imax >90°	12.4
Imax >95°	10.3


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> CITY-LIGHT PLUS LED	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> 57130_13
--------------------------------------	--	------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**    **siteco**

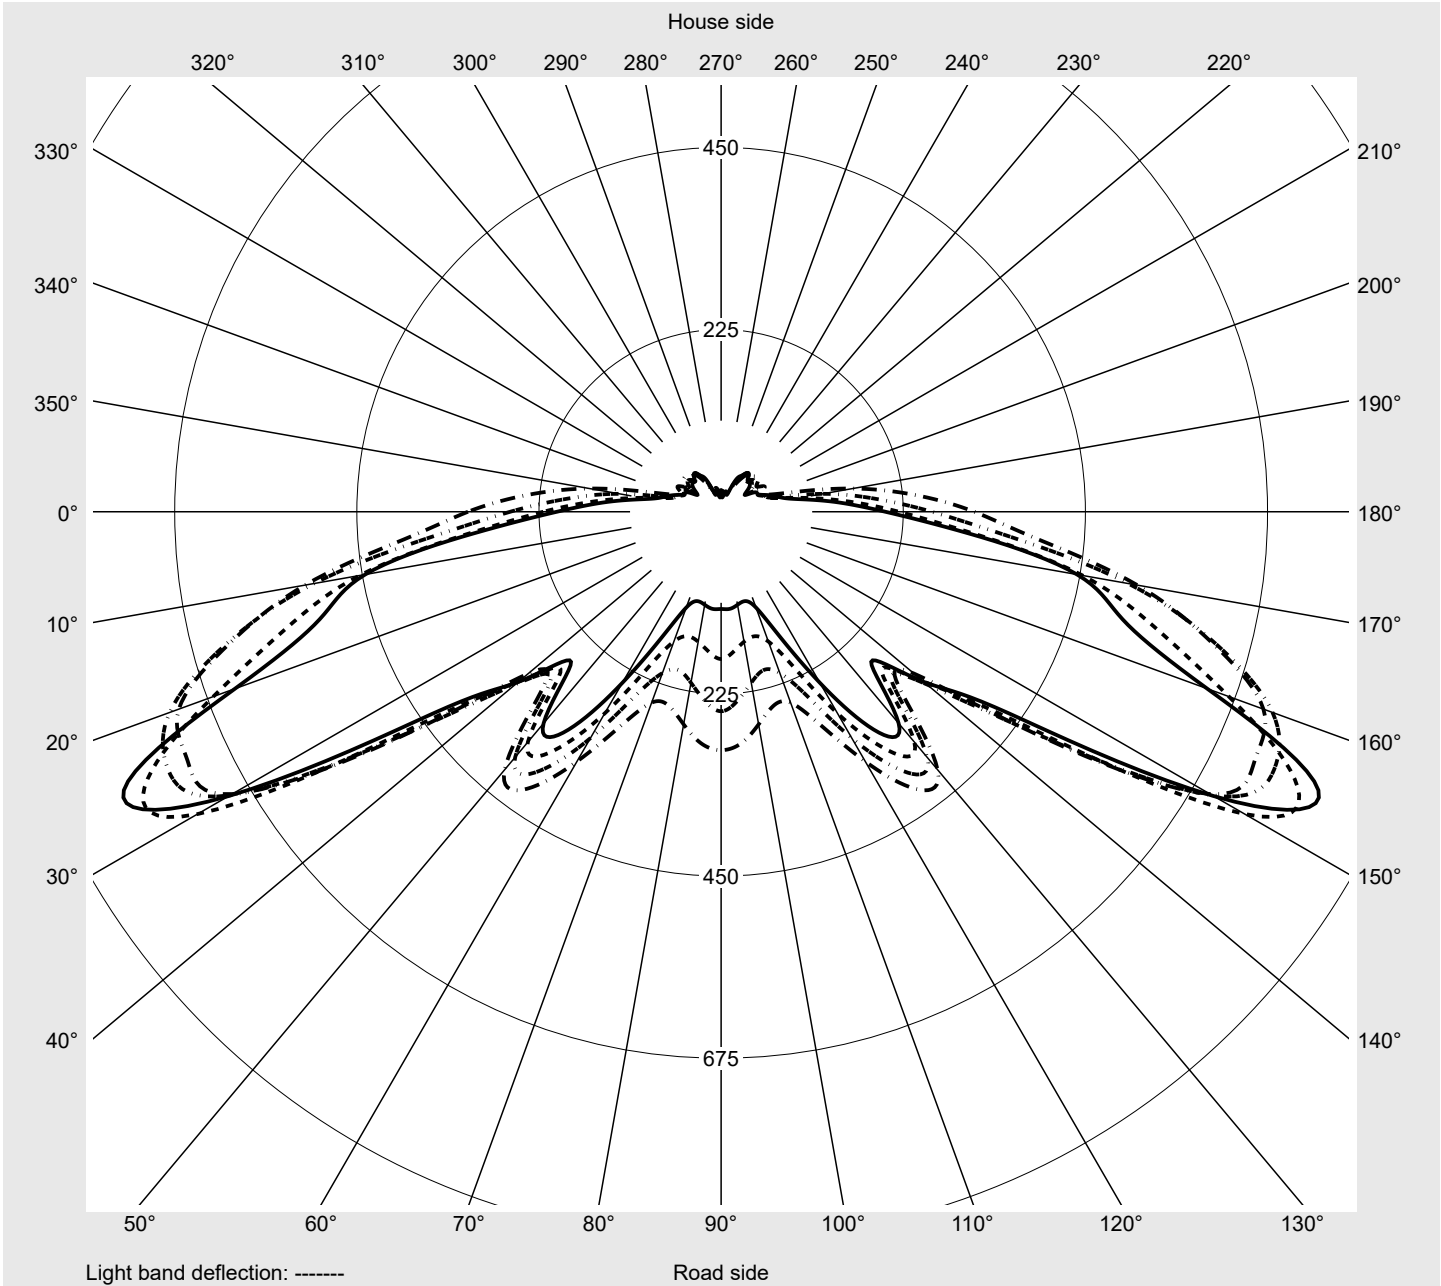

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	6.9	6.9	6.9	6.9	7.2	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
5,0°	7.9	8.2	8.2	8.9	9.3	10.0	10.0	10.3	10.6	11.0	11.7	12.7	13.4
7,5°	16.5	19.2	20.3	19.6	17.8	15.8	14.4	14.1	15.8	18.2	21.3	25.7	29.5
10,0°	24.7	23.7	24.7	26.8	24.4	21.6	17.5	17.2	24.7	36.0	45.3	49.8	46.7
12,5°	47.4	52.5	58.0	59.7	67.3	63.2	52.5	49.1	59.4	67.6	70.0	71.0	72.4
15,0°	65.2	66.6	67.6	70.4	78.9	71.7	59.7	52.2	64.9	85.5	107.4	108.5	116.4
17,5°	96.8	107.8	123.9	109.1	107.4	110.9	112.9	105.7	93.7	105.4	136.9	149.6	150.0
20,0°	116.7	112.2	152.0	127.7	143.1	136.3	134.2	126.3	103.3	122.9	157.9	160.3	174.0
22,5°	158.6	162.3	185.7	176.1	163.7	156.5	155.1	143.1	115.7	129.1	172.6	182.9	206.6
25,0°	152.0	153.1	177.8	189.8	186.0	174.4	179.9	182.3	123.6	144.2	182.6	188.1	226.2
27,5°	178.1	167.5	188.8	190.8	181.9	170.2	193.6	207.0	127.0	163.4	205.2	200.4	242.7
30,0°	191.9	196.0	216.9	229.6	216.6	205.6	203.9	213.8	137.3	186.0	244.4	224.1	256.7
32,5°	210.1	204.2	226.9	244.4	241.6	226.2	237.5	245.8	151.4	216.9	281.8	263.6	281.8
35,0°	238.2	229.6	243.0	254.7	237.2	235.8	282.8	290.0	164.1	229.3	310.3	300.7	313.4
37,5°	268.1	268.1	281.4	290.0	273.2	254.0	286.3	289.0	173.3	260.5	327.4	339.8	352.8
40,0°	277.7	278.0	282.1	307.2	303.4	297.6	316.8	312.3	188.1	297.6	353.9	356.6	384.4
42,5°	303.8	285.2	313.4	313.0	320.2	318.5	361.4	339.5	204.2	326.1	399.5	384.8	401.9
45,0°	314.4	305.1	341.2	341.5	345.6	335.0	377.2	370.3	221.4	339.5	427.3	407.8	412.6
47,5°	328.1	318.2	397.1	396.1	400.5	369.3	411.5	390.9	240.9	358.3	445.5	428.0	418.1
50,0°	327.1	339.5	435.6	440.0	452.4	422.5	477.1	435.2	255.0	363.5	447.9	432.8	415.6
52,5°	341.2	348.4	457.5	468.8	511.1	488.8	546.1	465.8	273.6	354.6	452.4	445.2	411.2
55,0°	348.0	370.3	458.2	509.7	574.6	582.1	613.0	491.2	296.9	347.3	442.8	446.5	399.9
57,5°	349.4	394.4	486.7	579.4	663.8	667.6	671.7	485.7	311.3	340.1	439.0	446.9	384.1
60,0°	312.7	393.7	522.0	628.8	712.9	727.3	697.4	486.7	311.0	315.1	416.0	417.7	356.3
62,5°	260.5	360.0	510.7	633.6	724.9	753.7	700.5	482.9	331.9	299.3	395.7	390.6	323.0
65,0°	219.7	314.4	453.4	556.0	667.6	781.9	746.9	465.8	326.4	280.8	371.4	360.0	287.6
67,5°	202.8	306.8	446.5	513.5	639.1	814.1	702.2	434.5	327.1	262.2	341.2	328.5	244.0
70,0°	227.9	334.0	444.5	502.5	606.5	727.6	627.8	370.0	293.5	220.7	302.0	290.0	202.8
72,5°	243.0	353.5	427.0	486.7	580.4	652.1	537.5	327.8	258.1	176.1	246.1	235.8	163.0
75,0°	191.2	298.6	370.0	416.7	509.7	538.5	441.0	228.6	168.5	86.5	181.9	193.2	141.1
77,5°	145.5	211.1	248.8	284.5	321.9	316.8	277.7	150.0	80.3	70.0	153.1	175.7	125.6
80,0°	81.7	93.0	127.7	154.5	157.2	148.3	145.2	68.0	48.7	52.2	79.3	87.9	55.3
82,5°	47.7	52.9	63.2	81.3	74.8	60.4	73.8	40.5	52.2	35.7	35.0	27.5	20.3
85,0°	22.7	24.4	29.9	31.9	25.7	28.5	33.6	18.5	27.5	19.9	14.8	15.4	15.1
87,5°	17.2	16.1	17.5	18.2	16.8	18.5	19.2	15.1	15.4	14.4	11.3	13.0	13.0
90,0°	11.7	11.3	12.7	13.4	13.0	12.7	12.4	11.7	10.3	8.9	9.6	11.0	11.7
92,5°	10.6	10.6	11.7	12.4	12.0	11.7	11.7	11.0	9.3	8.6	8.6	10.3	11.0
95,0°	10.0	10.0	10.6	11.3	11.0	10.6	10.3	10.0	8.9	7.9	8.2	9.6	10.3
97,5°	9.3	9.3	10.0	10.3	10.0	9.6	9.6	8.9	8.2	7.6	7.6	8.9	9.6
100,0°	8.6	8.6	9.3	9.3	9.3	8.9	8.9	8.6	7.9	7.2	7.2	8.2	8.9
102,5°	7.9	8.2	8.6	8.6	8.6	8.2	8.2	7.9	7.2	6.9	6.9	7.9	8.2
105,0°	7.6	7.9	7.9	8.2	7.9	7.6	7.6	7.2	6.9	6.9	6.9	7.6	7.6
107,5°	7.2	7.2	7.6	7.6	7.2	7.2	7.2	6.9	6.5	6.2	6.2	6.9	7.6
110,0°	6.5	6.9	7.2	6.9	6.9	6.5	6.5	6.2	6.2	6.2	6.2	6.2	6.9
112,5°	6.2	6.2	6.5	6.5	6.2	6.2	6.2	5.8	5.8	5.8	5.8	6.2	6.9

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	7.9	8.2	8.2	7.9	8.2	8.2	6.9	6.9	6.9	6.9	7.2	6.9	7.6
5,0°	13.7	14.1	13.7	14.1	13.7	13.7	7.9	7.9	7.9	7.9	7.6	7.6	7.6
7,5°	30.2	33.0	35.7	38.1	37.1	35.7	13.7	12.0	10.6	9.6	8.9	8.6	8.6
10,0°	40.8	45.0	58.3	59.0	54.2	50.8	26.4	29.2	27.8	23.0	17.8	13.4	11.0
12,5°	77.6	83.7	100.6	104.3	105.4	107.1	38.8	34.7	25.4	23.7	24.4	27.1	27.5
15,0°	127.7	106.7	99.5	125.3	133.5	131.8	64.2	60.8	55.9	66.9	57.0	49.4	47.4
17,5°	148.3	157.5	167.2	190.5	196.3	211.4	87.9	86.8	96.1	71.0	64.9	65.2	59.0
20,0°	190.5	194.3	199.8	209.7	232.7	236.8	117.7	113.6	100.9	85.5	60.4	62.1	58.7
22,5°	221.7	228.2	239.2	254.7	261.5	263.6	140.4	122.5	119.4	108.8	83.4	75.9	55.3
25,0°	252.3	255.7	255.7	258.1	263.3	265.0	135.2	130.8	127.3	115.7	92.7	74.1	55.9
27,5°	267.4	267.7	268.1	274.9	277.3	277.3	170.6	140.7	121.8	117.7	91.0	81.3	62.5
30,0°	296.2	294.1	288.3	288.3	291.1	293.8	176.8	157.9	136.6	123.9	100.6	80.0	58.3
32,5°	315.4	316.1	305.5	303.4	305.1	304.8	196.3	173.0	148.3	127.0	102.3	89.6	71.7
35,0°	338.4	340.8	327.8	318.5	321.9	327.4	212.5	177.1	152.0	133.5	101.3	96.8	86.8
37,5°	364.9	361.4	338.8	335.3	341.2	343.9	239.2	189.5	157.5	136.6	98.2	88.9	88.9
40,0°	381.0	366.2	350.1	348.4	352.5	355.6	249.5	201.5	165.4	133.2	91.6	85.8	90.3
42,5°	396.4	375.5	355.2	356.6	361.1	363.8	285.2	215.2	176.8	129.1	81.3	84.1	89.6
45,0°	411.5	382.7	361.1	362.8	366.6	369.3	304.8	231.0	174.4	117.7	74.1	83.4	89.6
47,5°	413.2	375.8	360.7	364.5	369.3	371.4	315.1	237.2	175.7	98.5	65.6	79.3	84.4
50,0°	399.5	365.9	355.9	361.1	367.6	370.0	309.9	239.2	168.9	84.4	61.4	76.2	77.9
52,5°	378.6	344.6	342.5	353.2	361.4	363.1	315.4	236.1	166.5	70.0	62.1	71.7	71.7
55,0°	351.8	319.5	321.6	334.3	347.3	352.2	309.9	233.4	151.4	68.6	61.1	69.3	66.2
57,5°	320.9	285.9	291.4	306.5	323.0	329.5	295.2	204.6	121.2	62.8	59.4	65.9	60.4
60,0°	290.7	250.9	248.5	266.7	286.9	294.5	239.6	165.1	94.4	61.8	53.9	62.1	53.9
62,5°	250.9	212.1	202.5	214.5	234.1	246.4	188.8	127.3	69.0	57.7	51.1	55.3	46.7
65,0°	211.1	170.6	159.3	163.0	173.7	181.9	153.1	99.2	65.2	56.6	49.8	52.5	40.8
67,5°	168.2	126.0	114.3	116.7	120.5	120.1	140.4	91.3	72.1	60.4	50.8	48.1	36.0
70,0°	138.3	97.8	76.9	73.8	76.5	76.9	155.8	99.2	79.3	62.1	49.8	45.3	31.9
72,5°	108.5	73.8	47.4	44.3	44.3	46.0	147.9	94.4	73.8	59.4	51.5	46.7	28.8
75,0°	86.5	54.2	35.4	31.2	29.9	29.5	99.5	72.8	60.8	50.5	48.4	45.3	28.5
77,5°	63.5	31.6	26.4	23.7	22.7	22.7	77.9	58.3	51.8	44.6	43.2	39.8	26.8
80,0°	32.3	20.6	19.9	19.2	18.5	18.5	55.3	47.0	44.6	39.5	35.7	33.0	24.7
82,5°	16.8	15.8	15.4	15.8	15.8	15.8	37.8	35.4	34.3	30.9	28.8	26.4	20.6
85,0°	14.1	13.7	14.1	14.1	13.7	13.7	22.0	24.0	26.8	27.1	24.0	21.6	18.9
87,5°	13.0	13.0	13.0	13.0	13.0	13.0	17.8	18.9	19.9	18.9	17.2	16.5	15.1
90,0°	11.7	11.7	11.7	11.7	11.7	11.7	12.0	12.0	11.7	11.3	11.0	10.6	10.0
92,5°	11.0	11.0	11.3	11.3	11.0	11.0	11.0	10.6	10.6	10.0	10.0	9.3	8.9
95,0°	10.3	10.3	10.6	10.3	10.3	10.3	10.0	10.0	9.3	9.3	8.6	8.2	7.9
97,5°	9.6	9.6	9.6	10.0	9.6	9.6	9.3	8.9	8.6	8.2	7.9	7.6	7.2
100,0°	8.9	9.3	9.6	9.3	8.9	8.9	8.6	8.2	7.9	7.9	7.2	6.9	6.5
102,5°	8.9	8.9	8.9	8.9	8.9	8.9	7.9	7.9	7.6	7.2	6.9	6.5	6.2
105,0°	8.2	8.2	8.2	8.2	8.2	8.2	7.2	7.2	6.9	6.5	6.2	6.2	5.8
107,5°	7.6	7.6	8.2	8.2	7.9	7.6	6.9	6.9	6.5	6.2	5.8	5.5	5.1
110,0°	7.6	7.6	7.6	7.6	7.6	6.9	6.5	6.2	6.2	5.8	5.5	5.1	4.8
112,5°	6.9	6.9	7.6	7.6	7.2	6.2	6.2	5.8	5.5	5.5	5.1	4.8	4.8

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	0.0	0.0
2,5°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.1	0.1
5,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.2	0.3
7,5°	8.2	8.2	8.2	8.2	8.2	8.2	8.2	7.6	7.6	7.2	7.6	0.6	0.9
10,0°	9.6	9.3	8.9	8.9	8.9	8.9	8.2	7.9	7.6	7.2	7.6	1.2	2.1
12,5°	23.3	17.5	12.0	10.0	9.3	9.3	8.6	7.9	7.2	7.2	7.6	2.7	4.8
15,0°	34.0	34.3	29.9	26.1	17.2	11.3	10.3	8.9	7.9	7.6	7.6	4.5	9.3
17,5°	42.6	32.3	25.1	22.3	20.9	20.3	15.1	14.1	13.0	9.3	8.9	7.4	16.7
20,0°	45.6	36.0	28.8	26.4	27.8	17.5	12.4	16.5	23.3	25.7	26.8	9.9	26.5
22,5°	41.2	31.2	26.8	26.8	26.8	20.9	15.8	24.4	26.1	22.3	22.7	12.9	39.4
25,0°	39.1	29.9	25.7	23.7	25.1	21.6	18.5	26.8	30.5	32.6	33.0	15.1	54.5
27,5°	42.2	33.3	26.8	27.8	28.8	25.7	25.7	28.8	27.1	29.2	30.9	17.6	72.1
30,0°	43.6	38.8	33.3	30.9	27.8	25.7	27.8	33.0	29.9	28.8	28.8	20.9	93.1
32,5°	62.5	54.2	40.5	34.7	31.6	29.2	27.1	31.2	28.5	27.5	28.1	24.6	117.7
35,0°	83.4	70.4	57.3	50.5	43.9	36.0	27.8	35.0	31.2	27.8	28.1	28.7	146.4
37,5°	87.5	76.5	65.6	59.0	48.7	37.4	32.6	41.9	38.1	34.3	34.3	33.0	179.4
40,0°	87.2	75.9	65.6	60.1	50.8	39.5	35.0	47.4	46.3	43.2	43.9	36.8	216.2
42,5°	87.9	75.9	66.2	62.8	53.2	42.6	37.1	48.4	47.4	44.6	45.3	40.9	257.1
45,0°	88.2	76.9	67.6	63.5	53.9	43.2	37.4	47.4	46.7	42.9	44.6	44.5	301.7
47,5°	87.2	77.2	67.3	63.8	52.9	43.2	36.7	45.6	45.3	41.5	42.6	48.3	350.0
50,0°	81.3	74.1	65.2	63.2	51.1	41.9	35.7	42.6	42.6	38.1	40.5	51.6	401.6
52,5°	77.6	72.8	64.2	62.1	49.8	40.2	34.3	39.1	38.8	35.0	36.4	54.7	456.3
55,0°	72.4	70.4	62.8	59.4	47.7	36.7	31.9	36.0	35.4	30.9	33.6	57.3	513.7
57,5°	67.6	67.6	61.4	56.6	46.0	34.7	29.9	33.0	31.9	27.8	29.5	59.4	573.1
60,0°	59.7	61.4	57.3	55.3	45.0	33.3	27.5	29.5	29.2	24.4	26.8	59.1	632.1
62,5°	53.5	55.6	52.9	58.3	47.0	37.8	25.7	27.5	26.4	22.0	22.7	56.9	689.0
65,0°	47.7	52.5	49.4	58.0	50.8	40.5	25.1	25.4	24.4	19.6	22.0	53.3	742.3
67,5°	43.9	49.8	50.8	58.0	51.8	43.9	24.0	23.7	22.0	17.8	18.5	50.4	792.7
70,0°	40.5	43.6	48.7	54.6	49.8	39.1	25.7	22.0	19.9	16.1	17.8	46.8	839.5
72,5°	35.0	40.5	44.6	51.5	48.4	34.3	27.5	20.9	17.5	14.4	15.8	42.7	882.2
75,0°	32.6	37.4	37.1	41.9	35.4	24.7	22.7	18.5	15.4	12.4	13.7	34.6	916.8
77,5°	27.5	29.5	27.8	31.6	23.0	18.5	16.1	15.8	13.4	11.0	11.7	24.6	941.3
80,0°	22.7	19.6	17.5	21.6	18.2	18.2	15.4	14.1	11.0	9.3	9.6	14.0	955.4
82,5°	17.8	14.8	13.4	15.8	15.1	16.1	14.1	12.7	10.0	8.6	8.2	8.4	963.7
85,0°	14.1	11.3	9.6	12.4	12.4	13.4	11.7	11.0	8.6	7.2	7.6	5.0	968.8
87,5°	11.7	9.3	7.9	10.0	10.3	10.6	9.6	9.6	7.6	6.9	6.9	3.8	972.6
90,0°	8.2	6.2	5.5	8.2	8.6	8.2	7.9	7.9	6.5	5.5	5.5	2.8	975.4
92,5°	7.6	5.8	4.8	6.9	6.9	6.9	6.5	6.5	5.1	4.8	4.8	2.5	977.9
95,0°	6.5	5.1	4.5	5.5	5.8	5.8	5.5	5.5	4.8	4.5	4.1	2.3	980.2
97,5°	6.2	4.8	4.1	4.8	5.5	5.1	4.8	4.8	4.5	4.1	4.1	2.1	982.4
100,0°	5.8	4.8	4.1	4.8	4.8	4.8	4.8	4.8	4.1	4.1	4.1	2.0	984.3
102,5°	5.5	4.8	4.1	4.8	4.8	4.1	4.1	4.1	4.1	3.8	4.1	1.8	986.2
105,0°	5.1	4.5	4.1	4.1	4.1	4.1	4.1	4.1	4.1	3.4	3.4	1.7	987.9
107,5°	4.8	4.1	3.8	3.8	4.1	3.8	3.8	3.8	3.4	3.4	3.4	1.6	989.5
110,0°	4.8	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	1.5	990.9
112,5°	4.1	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.1	2.7	1.4	992.3

## Photometric test report

<b>Family</b> CITY-LIGHT PLUS LED	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> 57130_13
--------------------------------------	--	------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	5.8	6.2	6.2	6.2	5.8	5.8	5.5	5.5	5.5	5.5	5.8	6.2	6.2
117,5°	5.5	5.5	5.8	5.8	5.5	5.5	5.5	5.1	5.5	5.5	5.5	5.5	6.2
120,0°	4.8	5.1	5.5	5.5	5.1	5.1	4.8	4.8	5.1	5.1	5.5	5.5	5.5
122,5°	4.8	4.8	5.1	5.1	4.8	4.5	4.8	4.8	4.8	4.8	4.8	4.8	5.5
125,0°	4.1	3.8	4.1	3.8	3.8	3.8	3.8	3.8	3.8	4.1	4.1	4.1	4.1
127,5°	2.7	2.7	3.1	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
130,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.7	1.7	2.1	2.1
132,5°	2.1	2.1	2.1	1.7	1.7	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4
135,0°	1.4	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140,0°	1.4	1.4	1.4	1.4	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.4	1.4	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.4	1.4	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.0	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	6.9	6.9	6.9	6.9	6.5	4.1	5.8	5.5	5.1	5.1	4.8	4.8	4.5
117,5°	6.2	6.5	6.9	6.9	5.5	2.1	5.1	4.8	4.8	4.8	4.8	4.5	4.1
120,0°	6.2	6.2	6.2	6.2	4.8	2.1	4.8	4.8	4.8	4.5	4.1	4.1	4.1
122,5°	5.5	5.5	5.5	6.2	4.1	2.1	4.5	4.5	4.1	4.1	4.1	3.8	3.4
125,0°	4.1	4.8	4.8	4.8	3.1	1.4	3.8	3.8	3.4	3.4	3.4	3.1	3.1
127,5°	2.7	2.7	3.1	2.7	2.1	1.4	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	2.1	2.1	2.1	2.1	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
132,5°	1.4	1.4	1.4	1.4	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	1.4	1.4	1.4	1.4	1.0	0.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
137,5°	1.4	1.4	1.4	1.0	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.7	1.4
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.4	1.4	1.4	1.4	1.4	1.4
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.1	4.1	3.4	3.1	3.4	2.7	2.7	3.1	2.7	2.7	2.7	1.3	993.6
117,5°	4.1	3.4	3.4	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	994.7
120,0°	4.1	3.4	3.4	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	995.8
122,5°	3.4	3.4	3.4	2.7	2.7	2.4	2.4	2.7	2.7	2.4	2.1	1.0	996.7
125,0°	2.7	2.7	2.7	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.8	997.5
127,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.5	998.0
130,0°	2.1	2.1	2.1	2.1	1.7	1.7	2.1	1.7	1.7	1.4	1.4	0.4	998.4
132,5°	2.1	1.7	2.1	2.1	1.4	1.4	1.4	1.4	1.7	1.4	1.4	0.3	998.8
135,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.1
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.3
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5
142,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.7
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.9
147,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.0	1.4	1.4	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5273ES14H000032</b> <b>EAN: 4058352564943</b>	<b>LP number</b> <b>57130_13</b>
---	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	14.2	14.6	14.4
95	239	252	1395	13.4	13.8	13.6
90	224	249	1321	12.7	13.1	12.9
85	210	247	1250	12.1	12.4	12.2
80	196	245	1177	11.4	11.7	11.6
75	182	242	1104	10.7	11.0	10.8
70	168	239	1029	10.1	10.2	10.1
65	154	236	953	9.4	9.6	9.5
60	141	232	882	8.8	8.9	8.9
55	128	229	810	8.2	8.4	8.3
50	115	225	737	7.6	7.7	7.6
45	102	221	663	7.0	7.2	7.1
40	89	216	588	6.2	6.4	6.3
35	76	210	513	5.7	5.9	5.8
30	64	204	442	5.0	5.2	5.1
25	51	195	365	4.4	4.5	4.4
24	49	194	352	4.3	4.4	4.4