
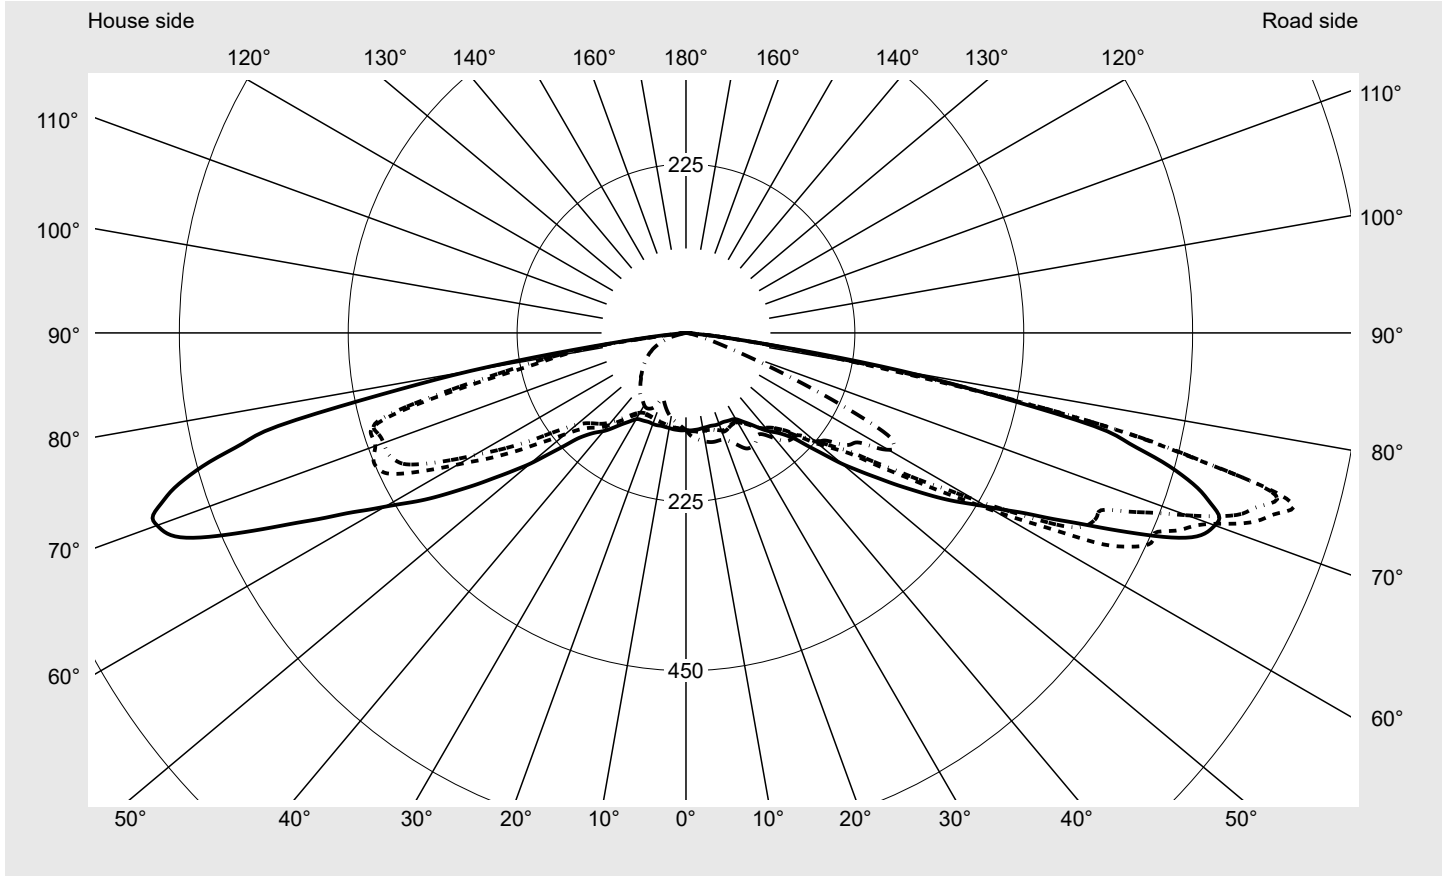


Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG DIM Rated values Net luminous flux = 5110 lm Power consumption = 39.1 W Luminous efficacy = 130.7 lm/W	serial documentation 26.10.2022



Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 842 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	827.2
Imax 80°	295.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 74°** **KMK 73°** **KMK 72°** **KMK 71°** **siteco**

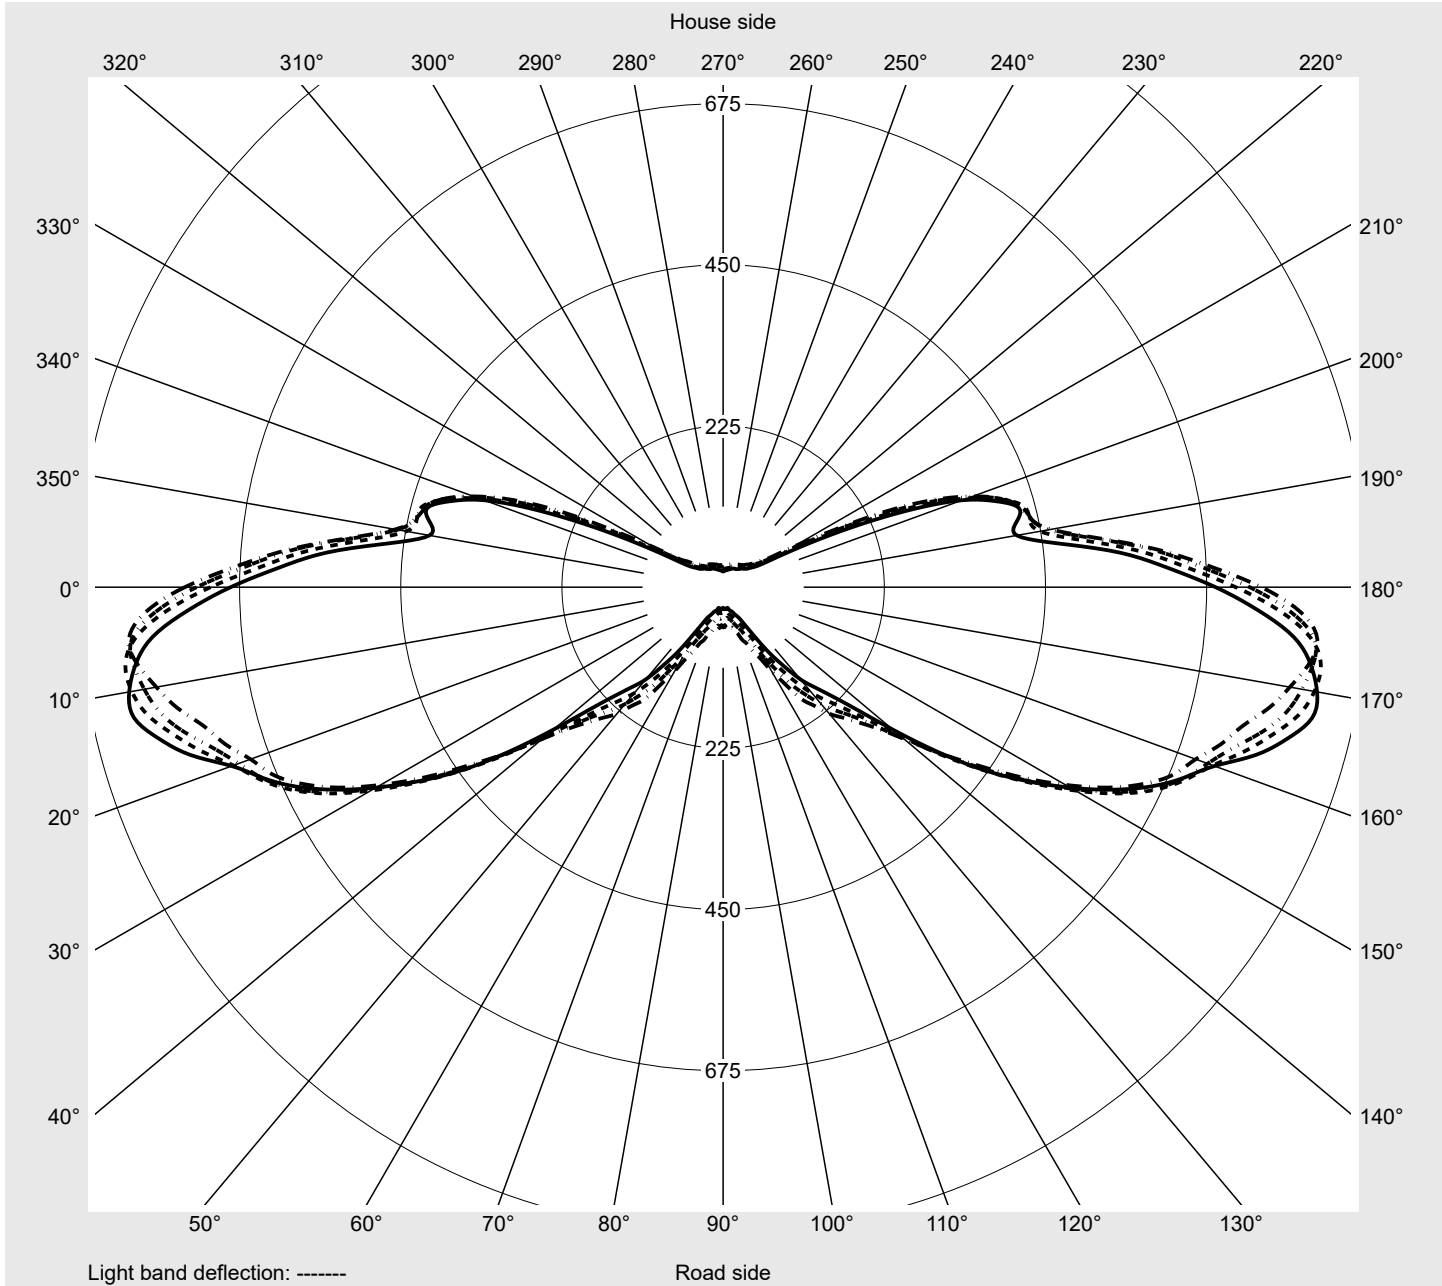

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	130.0	130.1	130.3	130.6	130.7	130.9	131.0	130.9	131.2	131.5	131.5	131.5	132.1	132.1	132.4
5,0°	129.8	130.2	130.2	130.3	130.9	131.5	131.5	132.7	132.7	132.3	133.9	133.9	133.9	133.9	133.9
7,5°	129.5	129.7	130.7	130.9	131.7	132.7	133.3	133.3	133.7	134.3	134.5	134.7	135.0	135.7	136.1
10,0°	128.7	129.4	130.3	131.2	131.8	132.9	133.5	133.4	134.1	134.5	135.0	135.6	135.9	136.5	137.0
12,5°	128.3	129.3	130.4	131.1	131.8	132.7	133.2	134.1	134.3	135.2	136.1	137.1	137.8	138.3	138.8
15,0°	128.1	129.8	131.2	131.9	132.4	133.5	133.6	134.9	135.7	137.1	138.3	139.0	139.8	140.4	141.4
17,5°	128.9	130.6	131.8	133.0	134.2	135.3	136.5	137.9	139.2	140.4	141.6	142.9	143.8	144.6	145.3
20,0°	129.0	131.1	133.1	134.7	136.9	138.3	140.4	142.3	143.6	144.7	145.7	146.7	147.5	148.3	149.5
22,5°	128.7	131.0	133.3	135.2	136.9	138.7	140.4	142.6	144.5	146.0	147.6	149.4	150.9	151.8	152.9
25,0°	129.5	131.5	133.4	134.4	135.5	136.8	137.9	139.1	141.8	144.2	146.7	149.1	151.4	154.4	156.5
27,5°	130.5	131.6	132.2	133.1	134.0	135.3	136.5	138.4	139.6	142.3	143.9	146.5	149.4	152.2	155.3
30,0°	132.7	133.8	134.2	135.4	136.5	136.4	137.5	138.9	139.5	141.3	142.6	144.2	145.6	148.3	152.2
32,5°	139.9	140.6	141.8	141.7	142.3	142.3	143.1	143.2	143.3	143.7	144.3	144.6	145.6	147.1	149.6
35,0°	148.3	149.2	149.7	150.8	151.6	150.5	149.9	150.7	150.4	149.4	148.7	147.3	146.8	147.3	149.2
37,5°	159.3	159.5	159.2	159.1	159.8	159.1	158.7	157.5	156.7	156.1	154.6	152.1	150.4	149.6	150.3
40,0°	170.7	169.7	168.2	167.0	166.3	166.1	164.9	163.2	161.8	160.8	159.4	157.5	155.7	153.6	151.4
42,5°	180.4	178.2	176.3	175.2	174.5	173.0	171.5	169.7	168.1	166.8	165.3	163.3	160.7	157.4	154.6
45,0°	195.4	192.7	189.9	187.8	186.5	185.0	182.8	181.1	178.8	176.6	173.8	169.4	164.9	161.5	157.9
46,0°	204.7	201.7	198.4	195.6	193.6	191.9	189.0	185.3	182.7	181.6	178.3	173.1	168.0	164.1	160.1
47,0°	219.1	215.1	210.6	206.8	203.4	200.3	197.7	194.3	190.5	187.5	183.4	177.4	171.8	167.6	163.2
48,0°	234.4	230.0	224.1	218.4	213.3	209.0	205.0	201.2	197.3	193.9	189.1	182.7	176.9	171.9	167.3
49,0°	252.0	247.1	240.5	232.8	226.0	219.8	214.6	210.1	205.5	201.0	195.7	189.1	182.6	177.0	171.9
50,0°	271.2	264.6	255.6	247.1	238.2	230.4	225.0	220.1	214.4	209.3	203.8	197.4	189.9	183.4	177.7
51,0°	287.4	280.4	270.8	259.5	248.1	239.5	233.6	228.7	222.9	218.5	213.2	206.8	198.2	191.4	186.0
52,0°	304.5	297.1	286.3	273.6	260.8	250.5	243.4	238.2	233.8	229.2	223.6	217.4	209.0	201.2	194.9
53,0°	322.3	314.6	303.6	289.0	273.2	262.0	255.3	249.7	245.0	241.4	235.7	229.6	222.1	214.4	206.3
54,0°	342.2	335.0	324.1	309.5	293.1	277.6	267.5	261.7	259.3	254.8	249.3	243.3	235.8	228.6	220.1
55,0°	361.7	356.4	346.0	333.0	318.1	302.6	289.6	281.4	276.4	271.0	265.2	258.5	250.4	243.4	235.7
56,0°	382.5	379.8	370.6	357.3	342.9	328.9	314.5	302.8	296.4	289.5	282.4	275.5	267.1	259.6	252.5
57,0°	403.7	407.8	402.4	392.4	374.9	358.8	341.0	329.3	318.1	309.3	300.0	292.1	283.2	275.7	267.0
58,0°	423.5	433.3	435.7	429.9	414.5	395.0	373.7	354.8	341.7	330.8	319.4	310.1	299.6	290.0	279.1
59,0°	442.1	458.9	465.8	463.5	452.4	431.7	404.3	382.4	366.8	352.5	338.5	326.1	312.5	300.3	288.5
60,0°	463.0	490.9	504.4	507.6	495.8	474.9	446.0	419.5	393.9	374.5	355.5	337.7	320.7	307.7	296.3
61,0°	486.8	523.8	544.1	550.3	537.9	517.7	486.6	453.7	419.9	393.1	368.4	346.4	327.0	313.1	304.0
62,0°	511.8	557.2	585.4	594.8	585.8	564.0	529.0	487.6	440.2	404.5	374.4	350.2	330.9	319.6	313.7
63,0°	544.5	595.1	624.1	641.8	640.8	617.8	568.0	510.4	453.0	410.8	378.0	355.4	339.2	331.7	326.8
64,0°	577.3	628.9	664.7	682.7	679.6	649.5	588.8	519.2	459.0	416.7	385.9	368.8	357.9	354.0	348.8
65,0°	616.2	672.3	706.3	726.2	715.2	671.5	596.9	519.9	464.8	429.9	405.1	393.4	383.3	378.5	366.7
66,0°	656.9	717.8	753.3	761.9	740.6	680.6	599.8	526.4	481.3	456.0	435.9	426.7	414.0	403.3	384.1
67,0°	696.5	765.3	796.9	790.2	747.7	680.0	603.4	543.4	510.0	491.9	476.9	467.3	447.0	426.5	400.2
68,0°	726.8	796.6	823.4	802.1	760.5	703.3	635.5	585.5	553.5	541.2	527.7	511.3	480.9	451.4	414.7
69,0°	742.6	807.9	826.0	806.4	771.3	720.6	668.9	639.2	610.6	599.9	580.0	553.5	514.6	471.5	422.7
70,0°	749.8	808.5	827.2	810.6	776.0	744.0	710.5	696.5	664.9	649.0	621.1	584.0	536.6	484.6	426.9
71,0°	751.5	807.4	832.7	824.7	803.3	780.0	750.1	728.7	702.0	681.9	649.2	605.7	551.9	494.1	433.6
72,0°	735.1	793.2	828.5	830.5	820.5	805.5	779.4	746.5	719.8	696.3	664.7	619.2	562.9	502.4	441.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	132.3	132.2	132.2	132.3	132.6	132.7	133.2	133.0	133.0	132.8	133.3	133.1	133.7	133.7	133.7
5,0°	134.2	134.6	135.0	134.6	135.2	135.3	135.7	136.2	136.3	136.8	137.3	137.4	137.8	138.2	138.8
7,5°	136.4	136.5	136.8	137.0	137.5	137.7	138.4	138.4	138.7	139.1	139.8	140.6	141.3	141.4	142.0
10,0°	137.6	137.7	138.4	138.8	139.3	140.0	139.9	141.0	141.0	140.9	142.3	142.9	144.0	144.6	144.9
12,5°	139.1	139.7	140.6	140.9	141.8	141.8	142.8	143.2	144.0	144.6	145.4	146.0	146.5	147.2	147.8
15,0°	141.7	142.7	143.5	144.3	144.5	145.1	145.7	146.4	146.5	146.8	148.2	148.2	149.0	149.0	149.0
17,5°	146.1	146.6	147.2	147.7	148.1	148.6	148.5	148.9	149.5	150.1	150.8	150.7	150.7	151.1	151.3
20,0°	150.4	151.0	152.0	152.3	152.2	152.0	152.7	152.7	152.7	153.1	153.8	153.7	154.3	154.4	154.4
22,5°	154.1	155.3	155.7	156.2	156.2	156.7	156.6	156.5	156.8	157.0	157.6	158.1	158.2	158.3	157.9
25,0°	158.4	159.8	160.4	160.8	160.8	161.8	161.1	161.5	162.8	163.5	164.6	165.9	165.4	165.3	165.2
27,5°	159.5	163.1	166.1	167.3	168.0	169.5	170.4	171.8	173.6	174.8	175.7	176.0	175.2	174.3	173.7
30,0°	157.8	163.8	170.1	175.4	179.1	181.2	182.8	183.3	184.4	186.1	186.5	185.3	182.1	179.7	179.5
32,5°	153.9	160.6	170.5	179.7	187.5	190.4	189.8	189.2	189.4	190.3	188.6	183.3	178.1	175.1	174.2
35,0°	153.4	159.2	166.6	176.2	185.1	190.5	189.9	186.6	184.1	183.4	181.2	176.9	173.5	170.8	169.7
37,5°	152.5	156.6	160.8	166.3	174.1	178.7	179.7	178.1	177.7	179.6	179.4	176.0	173.8	173.6	173.7
40,0°	150.7	152.6	156.2	158.0	160.9	166.4	172.0	175.8	178.3	180.1	181.2	182.6	185.0	186.8	187.8
42,5°	152.1	151.1	151.9	153.3	155.1	161.2	170.5	179.1	186.4	191.2	196.2	200.4	204.9	207.1	208.8
45,0°	154.4	152.4	151.4	152.2	154.4	161.2	173.9	187.8	197.9	206.4	214.4	219.2	220.4	221.0	220.6
46,0°	156.8	154.2	152.3	152.0	154.4	162.3	176.9	191.9	203.0	212.3	219.3	223.7	225.6	226.0	224.2
47,0°	159.3	155.9	153.5	152.9	155.4	163.2	179.7	196.9	208.7	216.6	223.5	227.8	229.7	229.5	227.0
48,0°	162.9	158.3	154.9	154.4	156.9	164.8	182.8	202.5	214.9	223.0	227.9	230.8	232.1	232.7	229.7
49,0°	167.0	161.6	157.6	156.5	158.6	167.3	186.6	205.1	218.0	227.9	233.7	235.2	235.5	232.7	227.4
50,0°	172.4	166.7	162.1	159.8	162.8	172.1	192.5	210.8	222.3	232.5	240.2	238.7	237.0	231.9	231.0
51,0°	179.5	173.2	168.4	165.8	167.9	178.2	199.4	217.3	228.7	242.7	247.0	242.8	240.7	239.5	240.4
52,0°	188.3	181.1	176.5	174.3	175.4	185.6	206.8	225.7	234.5	250.3	256.2	250.7	251.3	251.7	252.5
53,0°	199.1	192.5	187.3	184.8	187.3	197.4	216.4	234.3	243.1	255.2	262.6	261.0	261.3	261.6	259.5
54,0°	211.4	204.1	198.1	194.7	197.2	207.8	225.6	243.6	252.2	263.2	267.6	265.3	265.7	263.2	265.7
55,0°	225.6	216.7	210.3	205.8	207.3	217.9	235.7	253.0	260.3	267.9	267.4	266.0	264.8	268.9	272.9
56,0°	242.9	231.7	222.7	215.8	216.2	226.9	245.2	260.0	265.8	271.7	267.4	266.6	272.6	279.8	285.0
57,0°	256.6	242.7	230.7	222.5	224.4	237.4	256.6	270.0	275.0	276.9	273.4	278.4	287.1	293.0	294.1
58,0°	267.0	252.5	239.5	231.6	236.3	249.1	269.9	282.1	286.2	286.1	284.8	290.5	296.1	296.1	292.3
59,0°	275.1	261.5	251.5	246.7	251.1	265.1	284.7	293.7	293.8	291.6	290.8	291.7	291.7	287.0	280.5
60,0°	284.0	273.4	267.4	262.1	264.9	275.2	289.6	297.1	293.2	288.3	287.8	283.3	276.8	271.4	267.0
61,0°	295.2	288.3	282.9	276.8	275.2	283.2	292.3	296.7	291.1	284.7	275.8	264.0	256.0	253.0	248.6
62,0°	307.9	303.5	296.1	285.9	281.2	285.6	290.8	294.6	287.8	273.9	253.1	243.4	235.4	229.8	229.9
63,0°	325.0	318.0	303.9	290.6	283.2	285.9	289.3	289.9	273.7	253.6	233.3	221.8	211.9	211.9	209.1
64,0°	341.2	326.9	309.7	293.8	283.9	282.3	281.1	274.7	256.7	235.3	211.7	199.1	193.4	193.6	191.7
65,0°	352.8	333.3	312.2	294.7	281.7	276.4	271.5	261.8	241.0	218.1	194.4	183.9	179.8	185.1	187.2
66,0°	364.1	339.0	312.0	291.3	277.3	269.7	260.5	247.6	227.0	205.5	183.8	172.3	175.8	179.9	177.1
67,0°	372.5	340.2	309.8	288.3	273.9	261.1	249.4	234.9	216.6	195.2	174.3	169.9	169.0	168.7	160.7
68,0°	376.6	339.3	307.3	284.1	267.4	254.8	240.2	224.7	206.7	187.2	169.8	160.5	156.2	150.6	140.6
69,0°	378.0	337.0	303.1	279.7	261.4	248.2	230.0	216.2	197.6	177.5	156.8	143.5	133.4	125.9	112.3
70,0°	379.0	333.2	296.9	274.0	256.2	241.0	221.8	206.9	185.4	161.6	136.5	122.6	110.2	100.6	89.2
71,0°	380.2	329.5	291.8	266.6	246.9	230.4	208.3	190.5	159.5	134.8	111.8	98.3	84.6	78.5	68.0
72,0°	380.9	328.8	285.3	254.5	233.9	212.8	189.2	165.6	135.3	111.5	87.8	75.3	65.1	59.8	54.3

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	134.2	134.8	135.3	136.1	136.5	137.3	136.6	129.9	129.8	129.6	129.0	128.7	128.7	128.7	128.4
5,0°	139.4	140.0	140.1	140.7	141.4	140.9	140.7	129.5	129.1	128.7	128.3	127.4	127.4	126.6	126.8
7,5°	142.7	143.2	143.2	143.9	143.7	143.7	144.0	129.0	128.6	128.0	127.5	127.0	126.6	125.7	125.6
10,0°	146.5	146.2	146.2	146.6	146.9	147.1	146.8	127.8	127.1	126.8	126.3	125.9	125.2	124.3	123.7
12,5°	148.2	148.4	148.7	148.9	148.9	148.9	149.0	127.2	126.3	125.7	125.1	124.8	124.1	123.1	122.4
15,0°	149.6	149.6	149.8	149.9	149.2	150.1	149.9	126.9	125.7	124.8	124.4	123.7	122.8	121.6	121.8
17,5°	151.3	150.9	150.9	150.4	149.9	149.7	149.9	127.6	126.1	124.9	124.4	123.3	122.3	121.4	121.0
20,0°	153.6	152.6	151.9	151.5	151.4	151.1	151.7	127.5	125.9	124.5	123.3	122.4	121.4	120.7	119.9
22,5°	157.5	157.1	156.5	157.0	156.5	156.9	157.3	126.8	125.2	123.7	122.4	121.5	120.5	119.7	118.7
25,0°	165.1	164.2	164.7	165.5	165.0	165.5	165.2	127.3	125.4	123.8	122.5	121.3	120.1	118.6	117.2
27,5°	173.5	173.9	173.5	173.8	173.0	173.2	173.5	128.5	126.7	124.9	123.5	122.2	120.4	118.8	116.5
30,0°	178.9	177.7	177.0	176.3	176.8	176.0	175.1	131.7	130.5	128.3	126.4	125.1	122.8	120.4	118.1
32,5°	173.5	173.0	173.0	172.8	172.9	173.2	172.6	138.3	137.1	134.9	133.2	130.6	128.0	125.0	122.1
35,0°	170.0	168.9	167.3	167.4	167.1	167.1	166.5	147.9	146.5	144.5	141.9	139.4	136.1	132.2	128.5
37,5°	173.7	173.6	173.2	172.2	171.0	170.3	170.8	158.6	157.7	155.9	153.3	149.6	145.3	140.1	134.5
40,0°	188.8	190.4	190.0	187.7	185.1	185.5	183.1	170.8	170.5	168.8	165.4	160.8	155.4	148.2	140.3
42,5°	208.1	208.2	205.7	202.0	198.6	196.9	195.3	181.9	182.1	180.4	176.3	170.9	164.1	156.0	146.3
45,0°	219.8	219.1	211.9	206.8	202.3	200.3	199.6	196.8	195.8	192.1	185.9	178.7	170.7	161.6	149.9
46,0°	221.6	220.1	215.8	208.2	203.8	199.4	200.2	206.7	205.1	199.7	191.3	182.5	173.3	163.8	151.7
47,0°	225.1	220.0	216.5	208.6	202.4	199.4	200.9	220.4	217.5	209.6	198.4	187.1	176.4	166.0	153.5
48,0°	223.8	218.1	213.4	208.7	205.1	202.2	203.9	234.7	230.7	220.8	207.0	193.0	179.9	168.1	155.3
49,0°	225.4	221.9	218.0	215.3	213.6	213.8	211.3	252.4	247.3	235.2	218.0	200.6	184.6	170.9	156.9
50,0°	232.0	238.3	229.2	229.7	226.0	226.3	221.1	271.6	265.3	251.0	230.9	209.9	190.4	174.0	158.7
51,0°	245.9	254.8	243.7	239.2	234.6	232.2	229.1	288.6	281.5	265.8	244.0	220.5	197.9	178.4	160.7
52,0°	254.1	264.9	251.3	239.5	233.7	227.4	232.8	305.6	297.9	280.8	257.0	232.1	207.7	185.3	163.7
53,0°	260.6	268.5	258.6	250.6	245.3	241.8	240.2	323.0	314.0	295.0	269.5	243.8	218.8	194.4	170.5
54,0°	266.7	278.9	272.6	264.4	256.2	255.8	251.2	341.5	330.2	309.8	283.5	257.6	232.3	206.3	180.8
55,0°	279.0	284.8	282.6	277.9	267.3	266.0	260.4	358.0	344.1	323.7	298.3	273.1	248.0	220.9	192.8
56,0°	285.5	286.4	287.4	277.1	267.9	263.3	265.4	375.9	358.3	336.6	311.7	287.8	263.3	236.6	208.1
57,0°	292.4	287.8	284.1	272.9	266.3	263.3	268.4	393.0	371.9	349.2	325.6	303.1	278.7	252.5	226.6
58,0°	290.7	286.3	291.3	294.4	283.6	280.5	277.6	407.6	384.4	360.6	339.4	318.3	294.1	267.9	240.5
59,0°	278.7	278.8	289.0	302.1	302.5	298.0	297.9	419.7	394.1	371.3	352.6	333.1	309.5	284.0	258.1
60,0°	267.7	269.5	280.0	297.0	305.9	315.0	311.4	434.3	407.6	387.1	369.0	350.3	326.4	301.1	274.3
61,0°	249.9	252.8	265.4	286.0	308.3	317.7	317.6	450.6	421.7	403.7	387.6	370.0	345.0	318.0	288.7
62,0°	232.5	233.4	247.8	271.2	300.1	311.6	313.3	469.5	435.9	420.6	407.3	389.8	363.8	334.8	303.1
63,0°	210.5	214.1	229.5	256.6	289.2	307.1	304.1	497.2	456.6	439.8	427.7	409.9	382.2	351.1	315.1
64,0°	195.8	207.8	221.2	242.0	263.9	272.6	274.0	528.6	481.2	461.4	447.0	428.4	399.5	366.6	330.4
65,0°	193.0	195.0	200.9	209.0	222.4	228.7	232.2	566.7	509.6	482.8	462.0	441.7	413.6	380.6	343.9
66,0°	177.8	172.4	177.5	174.8	187.2	183.4	191.0	603.0	538.5	500.4	472.0	447.3	421.0	391.8	356.2
67,0°	155.5	148.8	147.2	145.6	152.3	149.9	152.3	631.8	566.0	518.3	478.9	450.1	425.8	400.5	365.3
68,0°	134.7	124.7	122.6	119.0	124.7	116.2	119.8	650.9	578.9	525.3	480.4	449.2	428.4	406.4	370.4
69,0°	104.5	96.5	91.9	88.9	92.3	87.9	93.4	662.8	586.6	524.4	475.2	444.8	428.8	409.6	374.1
70,0°	83.3	75.7	73.2	70.2	72.7	68.8	71.9	672.8	595.5	524.6	468.0	440.6	428.8	410.5	374.4
71,0°	64.9	58.0	57.5	54.0	57.0	53.2	55.9	678.9	607.0	526.4	464.7	439.8	429.5	409.7	370.6
72,0°	50.2	46.0	45.0	43.0	44.2	42.7	44.2	666.3	601.5	522.2	461.6	440.6	432.1	409.2	367.4

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	128.2	128.1	127.8	127.7	127.7	127.5	127.1	126.8	126.6	126.3	126.2	126.1	126.1	126.0	125.9
5,0°	126.9	126.5	125.9	125.4	125.4	125.3	124.9	124.4	123.9	123.9	123.5	123.2	122.8	122.5	122.5
7,5°	125.3	125.1	124.3	124.0	123.3	122.7	122.2	122.1	121.8	121.1	120.9	120.8	120.4	119.9	119.8
10,0°	123.9	122.6	121.8	121.7	121.7	121.0	120.4	120.1	119.7	119.7	119.6	119.1	118.5	118.3	117.8
12,5°	121.9	121.3	121.1	120.8	120.4	119.8	119.5	118.9	118.6	118.2	117.5	117.1	116.4	115.5	114.8
15,0°	120.4	120.6	119.3	119.3	118.7	118.6	118.2	117.2	116.3	115.7	115.0	114.2	113.2	112.3	111.2
17,5°	120.0	119.1	118.6	118.0	117.4	116.7	116.0	115.2	113.8	112.7	111.6	110.4	109.5	108.1	106.6
20,0°	118.6	118.1	117.7	116.7	115.9	114.6	113.4	112.2	110.8	109.1	107.7	105.8	104.0	102.0	100.2
22,5°	117.5	116.5	115.7	114.4	113.0	111.8	110.5	108.6	106.5	104.3	101.8	99.6	97.4	95.1	93.6
25,0°	116.1	114.9	113.7	112.6	111.4	108.9	106.4	104.0	100.4	97.8	94.9	92.8	91.3	89.7	88.7
27,5°	115.2	113.4	112.3	109.9	107.3	104.3	101.2	97.9	94.8	92.2	90.0	88.4	88.1	90.2	93.8
30,0°	115.2	113.9	110.3	107.0	103.4	99.8	95.6	92.7	89.8	88.1	87.1	89.4	93.5	98.4	103.7
32,5°	118.0	114.2	110.0	104.6	99.4	94.9	91.6	88.5	86.5	86.6	90.0	95.5	101.2	107.9	114.2
35,0°	123.1	117.2	109.8	102.4	96.5	91.5	87.3	85.2	85.9	89.2	94.5	101.0	107.7	114.2	119.5
37,5°	127.1	117.8	108.4	99.9	92.7	87.3	84.5	85.1	87.9	92.2	97.5	103.5	109.5	114.9	118.3
40,0°	130.1	117.6	106.1	95.9	88.2	84.0	84.2	87.3	91.0	94.3	98.5	103.2	107.5	110.8	111.7
42,5°	132.3	116.1	101.5	90.8	84.7	83.6	86.1	89.5	92.7	95.8	98.8	101.4	103.7	105.2	104.8
45,0°	132.9	113.6	97.6	87.9	84.7	86.1	88.9	91.1	93.2	95.3	97.0	98.4	99.1	98.8	97.5
46,0°	134.1	113.8	96.8	87.3	84.8	86.9	89.6	91.1	92.6	94.0	95.2	95.9	96.8	96.5	94.4
47,0°	135.5	114.2	96.4	87.2	86.1	88.2	89.9	91.1	92.1	92.5	93.4	93.9	94.3	93.7	91.4
48,0°	137.4	115.7	97.1	87.7	86.9	89.1	90.5	90.9	91.1	91.4	91.5	91.8	91.6	90.7	88.6
49,0°	139.2	117.5	98.4	88.8	88.0	90.1	90.7	90.3	90.0	89.5	89.6	89.7	89.0	87.9	85.9
50,0°	141.5	119.5	100.2	90.7	89.5	90.7	90.4	89.7	89.0	87.5	87.1	87.1	86.3	85.0	83.0
51,0°	142.6	122.1	103.3	92.8	91.3	92.2	91.0	89.6	87.8	85.9	84.5	84.0	82.7	81.4	80.3
52,0°	145.6	124.9	106.1	95.7	92.9	92.7	91.4	89.7	87.2	83.9	82.1	81.6	80.3	79.0	77.8
53,0°	149.7	128.4	109.4	98.4	95.5	94.1	91.8	89.3	86.0	82.5	80.1	79.3	78.2	76.7	75.5
54,0°	157.7	133.1	112.5	101.5	98.4	95.7	92.5	89.5	85.0	80.6	78.2	77.1	75.5	74.6	73.3
55,0°	166.4	140.2	117.6	104.4	99.6	96.3	92.6	88.2	83.2	78.6	75.7	74.3	73.2	72.3	70.9
56,0°	180.6	149.8	123.8	108.2	102.4	97.5	92.1	87.3	81.3	76.6	74.2	72.5	71.4	70.5	69.1
57,0°	197.8	164.1	133.4	112.4	104.1	97.9	91.6	85.5	79.5	74.6	72.0	70.6	69.4	68.6	66.8
58,0°	211.8	176.2	141.8	118.6	107.4	99.2	90.7	83.5	77.3	72.8	70.1	68.7	67.2	66.6	65.0
59,0°	228.1	190.9	153.0	125.5	110.3	99.6	90.0	82.2	75.5	71.0	68.4	66.8	65.1	64.4	63.2
60,0°	241.7	202.9	163.5	131.9	112.8	99.5	89.2	80.6	74.1	69.3	66.9	64.9	63.0	62.6	61.2
61,0°	255.1	213.4	172.0	139.1	117.1	100.1	87.3	78.2	72.0	68.0	65.1	63.1	61.4	60.5	59.0
62,0°	265.6	221.5	179.9	146.1	120.7	100.3	85.7	77.0	70.2	66.2	63.2	60.8	59.1	58.2	57.3
63,0°	274.1	228.8	185.4	149.5	121.3	99.4	84.2	74.2	68.4	64.3	61.3	59.0	57.2	56.1	55.7
64,0°	285.8	234.4	188.6	149.9	121.0	98.2	81.5	72.4	66.6	62.5	59.5	57.1	55.3	54.1	53.3
65,0°	294.0	239.3	189.9	149.1	116.5	94.6	79.2	70.0	64.2	60.2	57.6	55.3	53.5	52.2	51.1
66,0°	301.8	245.3	191.8	146.3	112.3	90.2	75.9	67.7	61.9	58.3	55.4	53.4	51.6	50.4	49.2
67,0°	310.4	249.2	190.8	139.6	105.4	85.2	72.3	64.4	60.1	56.4	53.4	51.0	49.3	48.6	47.5
68,0°	314.4	251.7	188.5	134.1	99.3	80.0	69.0	61.9	57.0	53.5	51.0	49.1	47.3	46.8	45.9
69,0°	318.7	252.9	183.3	127.5	92.5	76.0	64.9	58.2	53.6	50.9	48.0	46.5	44.4	44.6	43.3
70,0°	319.5	253.1	176.2	117.9	84.0	70.4	60.8	54.6	49.9	47.3	44.9	43.5	41.9	41.5	40.3
71,0°	318.7	249.1	168.2	110.7	75.1	64.1	56.1	50.5	46.9	44.4	42.0	40.6	39.3	38.6	37.4
72,0°	310.0	234.4	154.0	98.2	68.0	57.4	50.8	47.1	44.6	42.6	40.2	38.1	36.5	36.2	35.1

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	0.2	0.2
2,5°	125.8	125.7	125.6	125.6	125.5	125.5	125.4	125.3	125.3	125.3	125.3	125.3	125.3	1.6	1.7
5,0°	122.3	122.2	122.0	121.7	121.5	121.4	121.4	121.3	121.1	121.0	121.0	121.0	121.0	3.1	4.8
7,5°	119.5	119.4	119.2	119.1	118.7	118.0	118.0	118.0	118.0	118.0	117.9	117.9	117.9	4.6	9.5
10,0°	117.2	116.8	116.5	116.1	115.6	115.3	114.8	114.8	114.6	114.3	114.3	114.3	114.3	6.2	15.7
12,5°	114.2	113.6	112.6	112.3	111.6	111.2	110.7	110.4	110.0	109.5	109.4	109.3	109.3	7.7	23.3
15,0°	110.2	109.4	108.5	107.6	106.7	105.9	105.3	104.8	104.3	103.8	103.5	103.2	103.2	9.1	32.4
17,5°	105.0	103.8	102.4	101.3	100.2	99.2	98.4	97.6	97.1	96.8	96.9	96.2	96.4	10.6	43.0
20,0°	98.5	97.2	95.7	94.6	93.8	93.3	93.1	93.2	93.4	93.8	94.3	94.6	93.4	12.0	55.0
22,5°	92.4	91.4	91.0	91.6	93.2	95.2	97.4	99.6	101.2	103.2	104.0	104.7	105.0	13.6	68.6
25,0°	89.4	92.0	95.3	98.4	101.6	104.5	106.4	108.0	109.2	110.0	110.6	110.9	111.2	15.2	83.8
27,5°	97.9	102.1	105.9	109.0	111.2	112.5	113.3	113.5	113.5	113.5	113.3	113.0	113.0	17.0	100.7
30,0°	108.8	113.0	116.2	118.3	118.8	118.2	117.2	115.8	114.3	112.9	111.7	111.2	111.2	18.8	119.5
32,5°	118.5	121.1	122.0	121.4	119.9	118.2	115.9	113.3	110.8	109.2	107.8	107.2	107.2	20.4	139.9
35,0°	122.3	122.7	121.1	118.6	115.7	112.5	109.5	107.0	105.3	104.4	103.8	103.8	103.8	21.9	161.7
37,5°	118.4	116.4	113.4	109.6	106.4	103.8	102.0	100.7	100.3	99.9	100.0	100.1	100.4	23.4	185.1
40,0°	110.4	107.1	103.5	100.0	98.4	96.7	95.8	95.3	95.2	94.7	95.2	94.6	94.6	25.1	210.2
42,5°	102.7	99.2	96.2	94.3	92.6	91.2	90.6	89.9	90.0	89.6	89.5	89.2	89.7	27.1	237.3
45,0°	95.4	92.8	90.7	88.7	87.4	86.1	85.7	85.4	84.8	84.8	84.5	84.5	84.8	20.3	257.5
46,0°	92.3	89.9	88.4	86.8	85.3	84.1	83.6	83.2	82.7	82.6	82.6	82.6	83.5	12.0	269.6
47,0°	89.6	87.7	86.2	84.5	83.2	82.3	81.4	81.2	81.1	80.8	81.1	81.1	81.1	12.4	282.0
48,0°	87.0	85.2	83.9	81.8	81.1	79.9	79.3	79.0	79.2	78.7	79.3	79.2	79.2	12.8	294.8
49,0°	84.3	82.9	81.6	79.7	79.1	77.7	77.2	77.2	77.1	76.8	77.1	77.4	77.4	13.4	308.2
50,0°	81.8	80.2	79.0	77.7	77.4	75.9	75.3	75.1	75.3	75.0	75.3	75.9	75.6	14.0	322.2
51,0°	79.4	78.1	76.5	75.6	75.0	74.1	73.5	73.2	73.4	73.2	73.7	73.7	73.7	14.6	336.8
52,0°	77.0	76.0	74.9	73.8	72.9	72.2	71.6	71.4	71.6	71.6	71.9	71.9	71.9	15.3	352.1
53,0°	74.6	73.9	73.3	71.7	71.0	70.3	69.5	69.5	69.8	69.8	70.0	70.3	70.0	16.1	368.2
54,0°	72.3	71.3	71.3	69.8	69.2	68.5	67.6	67.7	67.9	67.9	68.2	68.2	68.2	17.0	385.2
55,0°	70.3	69.4	69.0	68.0	67.6	66.7	65.8	65.3	65.8	66.1	66.3	66.0	66.3	17.9	403.1
56,0°	68.0	67.5	66.8	66.0	65.8	64.6	63.9	63.3	63.6	63.9	64.5	64.2	64.5	18.8	422.0
57,0°	65.7	65.5	64.9	63.7	63.4	62.5	62.4	61.5	61.8	61.8	62.4	62.7	62.7	19.9	441.8
58,0°	63.8	63.3	63.0	61.9	61.2	60.3	60.0	59.4	59.7	59.9	60.2	60.8	60.8	21.0	462.8
59,0°	62.0	61.4	61.0	59.8	59.1	58.1	57.5	57.2	57.5	57.8	58.4	58.7	59.0	22.0	484.8
60,0°	60.1	59.3	58.7	57.6	56.9	56.0	55.6	55.1	55.4	55.9	56.5	56.8	57.1	23.0	507.8
61,0°	58.2	57.3	56.7	55.5	54.8	53.8	53.5	52.9	53.2	54.1	54.4	54.7	55.3	23.8	531.6
62,0°	56.4	55.5	54.3	53.3	52.6	51.7	51.3	50.8	51.3	51.7	52.2	52.8	52.8	24.5	556.1
63,0°	54.5	53.3	52.1	51.2	50.5	49.3	49.2	48.9	49.2	49.5	50.1	51.0	51.0	25.2	581.3
64,0°	52.7	51.2	50.0	48.8	48.3	47.1	47.1	46.8	47.0	47.4	48.2	48.8	49.1	25.7	607.0
65,0°	50.6	49.0	47.9	46.8	46.5	45.5	45.2	44.6	45.2	45.2	46.1	46.7	46.7	26.2	633.2
66,0°	48.4	47.0	46.5	45.1	44.6	43.8	43.3	42.5	43.1	43.1	43.6	44.2	44.2	26.7	659.9
67,0°	46.5	44.8	44.4	43.1	42.5	41.3	41.2	40.3	40.9	40.9	41.5	41.8	41.8	27.1	687.0
68,0°	44.5	42.9	42.3	41.3	40.3	39.1	38.8	38.5	38.7	38.5	39.3	39.3	39.3	27.6	714.6
69,0°	42.1	40.9	40.2	38.9	38.5	37.2	36.6	36.3	36.3	35.7	36.6	36.6	36.9	27.8	742.4
70,0°	39.7	38.4	37.7	36.7	36.4	35.4	34.8	33.9	33.8	33.5	33.5	33.5	33.8	27.9	770.3
71,0°	37.2	36.0	35.5	34.6	34.0	33.3	32.6	31.4	31.4	31.1	31.0	30.7	30.7	27.9	798.2
72,0°	34.8	33.6	33.4	32.2	31.5	30.8	30.2	29.5	29.2	28.6	28.9	28.3	28.3	27.6	825.8

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	715.6	779.1	824.2	841.6	838.1	823.1	794.4	762.7	727.5	700.2	667.8	623.7	567.8	507.8	446.5
74,0°	687.5	748.2	799.8	827.2	841.9	842.3	815.9	779.3	729.9	695.6	658.4	612.1	559.6	504.0	445.5
75,0°	651.6	701.3	748.4	774.9	800.0	804.8	799.9	771.0	717.3	674.7	631.6	580.3	534.9	485.6	426.3
76,0°	608.7	647.3	679.5	689.6	708.1	710.0	713.1	701.6	672.4	629.9	588.3	540.1	499.8	449.7	386.9
77,0°	567.9	591.4	613.0	614.5	622.5	621.0	626.0	616.5	596.1	565.6	533.9	486.1	445.6	392.9	336.5
78,0°	472.5	473.8	514.2	501.0	521.9	500.7	505.7	481.3	496.3	476.3	460.8	415.0	376.1	322.9	275.3
79,0°	375.2	360.7	361.2	350.5	357.1	355.1	374.0	364.8	383.9	370.5	367.3	329.3	301.1	249.1	210.3
80,0°	291.2	271.4	261.7	247.3	245.4	241.5	257.1	260.5	281.8	280.8	280.5	257.5	229.9	186.1	151.1
81,0°	190.7	180.2	174.1	167.4	165.9	162.1	162.3	163.6	192.2	200.0	206.8	198.4	180.8	146.2	112.5
82,0°	109.0	99.4	97.8	94.4	98.6	98.3	104.2	106.1	120.4	128.1	136.3	137.1	133.0	115.5	88.6
83,0°	60.8	57.5	59.6	58.3	60.8	58.8	59.1	55.9	72.0	76.5	84.2	85.7	83.9	74.8	66.2
84,0°	29.7	27.9	29.7	29.7	32.8	34.2	37.6	37.0	41.7	44.4	52.4	56.6	55.7	43.5	34.9
85,0°	6.7	6.3	6.4	6.5	8.1	8.4	12.6	14.0	24.2	25.5	28.4	28.0	22.6	11.1	7.3
86,0°	4.9	4.4	4.4	4.4	4.5	4.7	4.8	5.1	10.2	10.5	12.0	11.2	10.9	7.1	5.2
87,0°	3.7	3.8	3.8	3.9	4.0	3.3	3.3	2.5	3.4	2.8	2.8	2.9	2.8	2.4	2.4
88,0°	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.5	2.5	2.5	2.1	1.7	1.7	1.8
89,0°	2.5	2.5	2.5	2.6	2.5	2.9	2.9	2.1	2.2	1.9	2.0	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
--	--	-------------------------------



C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	384.7	323.9	274.7	239.4	215.1	193.2	167.1	139.2	111.1	87.1	67.0	58.7	51.8	47.1	43.6
74,0°	377.9	309.4	252.7	215.3	189.7	168.1	138.2	110.5	80.9	60.9	49.0	44.0	40.0	36.3	34.7
75,0°	351.5	282.7	226.5	192.0	166.5	141.4	111.3	81.5	57.4	46.0	37.9	34.6	32.5	31.3	29.1
76,0°	312.4	248.2	198.9	167.2	141.0	114.1	81.3	57.8	41.7	35.9	31.2	27.8	24.7	23.2	20.7
77,0°	268.5	209.2	164.2	137.9	111.2	83.3	56.1	40.2	32.0	27.5	22.3	20.1	17.5	17.1	15.2
78,0°	216.5	171.6	134.8	112.8	83.6	60.3	40.6	30.0	24.3	20.2	17.4	16.0	14.0	12.4	11.2
79,0°	164.5	134.3	106.7	87.7	62.4	43.7	28.4	22.9	16.9	15.1	11.1	10.3	9.0	9.0	7.6
80,0°	121.9	102.2	85.4	65.8	38.8	26.7	20.0	14.8	12.3	9.7	7.5	6.8	6.0	6.0	5.2
81,0°	86.5	76.7	53.2	29.6	21.8	17.2	13.5	10.1	7.4	6.0	5.5	4.8	4.8	4.8	4.8
82,0°	50.7	38.4	30.2	14.8	10.4	10.4	7.9	6.6	5.3	4.7	3.1	3.1	3.5	3.6	3.6
83,0°	36.4	26.3	18.5	10.6	6.5	6.4	6.0	4.8	4.2	3.5	3.5	3.5	1.9	1.8	1.8
84,0°	26.3	9.4	6.3	5.7	4.6	4.6	3.2	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8
85,0°	5.9	4.3	3.1	2.5	2.5	2.5	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8	2.1
86,0°	3.0	2.5	2.5	2.5	1.9	1.9	2.0	1.8	2.0	1.8	2.0	2.1	2.1	2.1	1.2
87,0°	1.9	1.8	1.9	1.9	1.2	1.2	1.2	2.0	1.2	2.0	1.2	1.2	1.5	1.2	1.2
88,0°	1.8	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.2	0.6	1.5	1.2
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	0.4	1.4	0.6	0.6	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
--	--	-------------------------------



C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	40.9	38.8	35.9	34.7	36.5	35.6	35.6	646.5	582.2	504.2	449.0	438.0	435.0	407.6	362.2
74,0°	32.7	29.7	31.1	30.0	30.4	30.7	28.9	621.1	555.2	469.8	416.2	419.3	427.5	399.2	354.9
75,0°	27.7	24.2	22.7	20.9	20.3	19.7	22.1	592.8	525.7	424.7	366.4	376.8	394.9	376.0	331.4
76,0°	19.8	17.8	17.1	17.2	16.3	15.7	16.6	560.0	489.3	371.9	309.5	318.6	343.2	338.3	301.5
77,0°	15.2	13.8	12.9	13.5	13.2	12.9	12.9	519.9	438.9	306.8	253.0	262.1	291.9	295.5	267.3
78,0°	11.2	10.7	10.7	9.2	9.8	8.3	9.8	440.2	374.7	243.6	203.4	215.0	245.6	254.7	228.1
79,0°	7.9	7.0	7.0	6.1	7.0	6.1	7.4	371.6	318.4	205.4	175.1	187.0	210.9	219.8	201.7
80,0°	4.3	4.6	4.6	4.6	4.6	4.6	4.9	295.3	256.2	170.4	156.9	164.0	177.3	179.6	153.7
81,0°	4.9	4.0	4.0	4.3	4.3	4.3	3.7	196.2	181.0	135.4	134.7	137.2	138.3	133.0	114.9
82,0°	3.6	3.6	3.4	2.5	2.5	2.5	3.1	123.5	127.4	97.7	98.0	93.8	90.5	81.3	58.9
83,0°	1.8	1.8	2.7	2.8	2.8	2.5	2.5	67.1	71.7	45.5	36.9	29.9	35.8	35.3	34.5
84,0°	2.1	1.8	2.1	2.1	2.1	3.1	2.5	31.6	32.3	21.5	12.4	8.9	12.9	14.0	6.8
85,0°	1.0	2.1	1.2	1.2	1.2	1.2	1.8	6.1	7.0	6.4	6.3	5.8	6.0	5.6	5.5
86,0°	2.1	1.2	1.2	1.2	1.2	1.2	1.2	4.8	4.8	4.7	4.6	4.5	4.4	4.4	4.0
87,0°	1.2	1.5	1.2	1.2	1.2	1.2	1.2	3.6	3.6	3.6	3.5	3.5	3.4	3.4	3.4
88,0°	1.5	0.6	1.2	1.2	1.2	1.2	1.2	3.0	3.0	3.0	2.9	2.9	2.8	2.8	2.8
89,0°	0.3	0.6	1.2	1.2	1.2	1.2	1.2	2.4	2.4	2.3	2.3	2.3	2.2	2.2	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	298.6	218.2	138.7	84.4	60.2	52.1	46.6	43.7	42.7	40.7	38.5	35.7	34.5	33.6	33.1
74,0°	281.3	196.9	122.6	72.2	53.6	47.3	42.4	39.9	37.9	36.9	34.5	33.1	31.9	30.8	30.6
75,0°	253.8	172.0	102.0	61.9	48.2	42.3	38.0	35.0	33.6	32.2	30.9	29.7	28.9	28.4	28.0
76,0°	224.6	146.8	83.4	52.6	43.1	38.9	35.1	31.8	30.0	29.2	27.9	27.1	26.0	26.2	25.1
77,0°	192.0	120.5	63.4	43.5	37.1	34.0	29.9	30.0	27.5	26.6	25.3	24.1	23.5	23.3	22.7
78,0°	161.3	92.1	50.8	36.0	30.8	28.7	26.1	25.2	23.2	22.5	21.8	21.6	21.0	20.8	20.2
79,0°	136.9	76.0	40.2	30.0	26.0	23.8	21.8	21.0	20.2	19.4	18.7	18.6	18.3	17.7	17.6
80,0°	100.6	53.0	29.4	23.9	21.0	18.9	18.1	17.3	17.1	15.7	15.1	15.5	14.9	14.7	14.5
81,0°	73.0	38.3	22.0	18.1	16.0	15.2	13.8	13.6	13.4	12.7	12.6	12.4	12.3	11.7	11.7
82,0°	38.4	22.2	15.0	14.0	12.3	11.4	10.7	10.5	10.4	9.7	9.5	9.5	9.2	9.1	9.0
83,0°	22.1	12.6	9.5	8.6	8.5	8.3	7.5	7.4	7.3	7.2	6.5	6.9	6.3	6.2	6.1
84,0°	6.9	6.6	6.1	6.0	5.9	5.8	5.7	5.6	5.5	4.8	4.1	4.0	3.9	3.9	3.8
85,0°	4.8	5.3	3.9	3.8	3.9	3.9	3.8	3.7	3.1	3.6	2.5	2.4	2.3	2.2	2.1
86,0°	3.1	4.1	3.3	3.2	2.5	2.5	2.5	2.5	2.4	2.4	2.4	1.8	1.7	1.2	1.2
87,0°	3.3	2.5	2.5	2.6	2.5	2.5	1.8	1.9	1.8	1.8	1.8	1.2	1.2	1.2	1.2
88,0°	2.7	2.7	2.6	1.9	2.6	1.9	1.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	2.1	1.8	1.8	1.8	2.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	32.3	31.3	31.0	29.7	29.3	28.4	27.8	27.4	26.8	26.4	26.1	25.5	25.8	27.2	852.9
74,0°	29.9	29.2	28.5	27.3	26.9	25.7	25.3	24.4	24.0	23.4	23.0	22.1	22.7	26.3	879.2
75,0°	27.5	26.6	26.1	24.8	24.1	22.9	22.5	21.0	20.3	18.5	18.1	16.9	17.2	24.6	903.7
76,0°	25.0	23.8	23.6	22.4	21.6	19.6	18.6	16.4	15.1	12.4	11.7	9.8	10.4	22.1	925.9
77,0°	22.5	21.3	20.9	19.6	18.4	15.6	14.0	11.5	10.2	8.0	6.8	4.9	5.5	19.4	945.3
78,0°	20.1	18.8	17.9	16.5	14.6	12.1	10.5	8.3	6.8	5.8	4.0	3.1	3.1	16.0	961.3
79,0°	17.4	16.3	15.0	13.7	11.6	9.4	8.3	6.5	4.9	4.0	2.8	1.8	1.8	12.5	973.9
80,0°	14.6	13.9	12.6	11.3	9.0	7.4	6.5	4.9	4.0	2.5	2.1	1.2	1.2	9.5	983.4
81,0°	11.9	11.0	9.9	8.8	7.4	5.9	5.0	4.0	3.4	1.5	1.5	1.2	1.2	6.8	990.2
82,0°	8.9	7.8	7.1	6.4	5.7	4.4	3.5	3.1	2.5	1.2	1.2	1.2	1.2	4.4	994.6
83,0°	5.8	5.3	4.6	4.2	3.5	2.9	2.2	2.2	1.5	1.2	1.2	1.2	1.2	2.6	997.1
84,0°	3.3	2.9	2.4	2.4	2.2	1.6	1.6	1.6	1.2	1.2	1.2	0.9	1.2	1.4	998.5
85,0°	2.1	1.2	1.2	1.2	1.6	1.2	1.2	1.2	0.9	0.9	0.9	0.6	1.2	0.6	999.1
86,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.7	0.9	0.3	0.9	0.3	0.6	0.3	999.4
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.3	0.6	0.6	1.2	0.3	0.0	0.2	999.7
88,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.0	0.9	1.2	0.3	0.0	0.2	999.8
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.9	0.9	0.3	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
--	--	--------------------------------------

siteco

Dimming levels table environmental temperature: 25°C

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	5110	39.1	40.8	40.0
95	94	4864	36.7	38.2	37.4
90	88	4611	34.3	35.8	35.0
85	82	4350	31.9	33.4	32.6
80	76	4082	29.7	30.9	30.3
75	71	3856	27.7	28.9	28.3
70	65	3577	25.4	26.5	26.0
65	60	3336	23.5	24.5	24.0
60	54	3043	21.3	22.1	21.7
55	49	2793	19.4	20.1	19.8
50	44	2536	17.5	18.2	17.8
45	39	2275	15.7	16.3	16.0
40	35	2060	14.2	14.7	14.4
35	30	1787	12.4	12.9	12.6
30	25	1508	10.6	11.0	10.8
25	21	1280	9.2	9.5	9.4
21	17	1048	7.8	8.0	7.9
17	14	872	6.8	7.0	6.9

Dimming levels table environmental temperature: 5°C

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	5230	39.6	41.3	40.4
95	94	4972	37.1	38.7	37.9
90	88	4709	34.7	36.2	35.4
85	82	4438	32.3	33.8	33.0
80	76	4162	30.0	31.3	30.6
75	71	3927	28.1	29.2	28.6
70	65	3639	25.7	26.8	26.2
65	60	3392	23.9	24.8	24.4
60	55	3142	21.9	22.9	22.4
55	50	2887	20.0	20.8	20.4
50	45	2627	18.2	18.9	18.5
45	40	2360	16.3	16.9	16.6
40	35	2088	14.5	14.9	14.7
35	30	1809	12.6	13.1	12.8
30	26	1583	11.2	11.5	11.4
25	21	1295	9.3	9.7	9.5
20	17	1060	7.9	8.2	8.0
17	14	881	6.9	7.1	7.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
--	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	5180	39.3	41.0	40.2
95	94	4928	36.9	38.5	37.7
90	88	4669	34.5	36.0	35.2
85	82	4403	32.1	33.6	32.8
80	76	4130	29.8	31.1	30.4
75	71	3899	27.9	29.0	28.4
70	65	3614	25.5	26.7	26.1
65	60	3370	23.7	24.7	24.2
60	55	3123	21.8	22.7	22.2
55	50	2871	19.9	20.7	20.3
50	45	2612	18.0	18.7	18.4
45	40	2348	16.1	16.8	16.5
40	35	2078	14.3	14.8	14.6
35	30	1802	12.5	13.0	12.8
30	26	1576	11.1	11.5	11.3
25	21	1290	9.3	9.6	9.4
20	17	1056	7.8	8.1	8.0
17	14	878	6.8	7.0	6.9

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5A33A08DB EAN: 4058352785027	LP number 59080_463
--	--	--------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	5110.0	39.1
5.0	5230.0	39.6
15.0	5180.0	39.3