

## Photometric test report

Family  
Streetlight 21 midi easy LED

Order number: 5XE7M33A08NB  
EAN: 4058352683613

LP number  
59158\_131



**Version** post-top or side-entry mounting  
**Optic** asymmetric, wide distribution (ST1.0a G), Back Light Control (BLC)  
**Cover** toughened safety glass  
**Lamps** LED 3000 K | CRI ≥ 70  
**Controlgear** ECG DIM  
**Rated values** Net luminous flux = 19980 lm  
Power consumption = 151.2 W  
Luminous efficacy = 132.1 lm/W

serial  
documentation  
23.08.2022

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 530 cd/klm

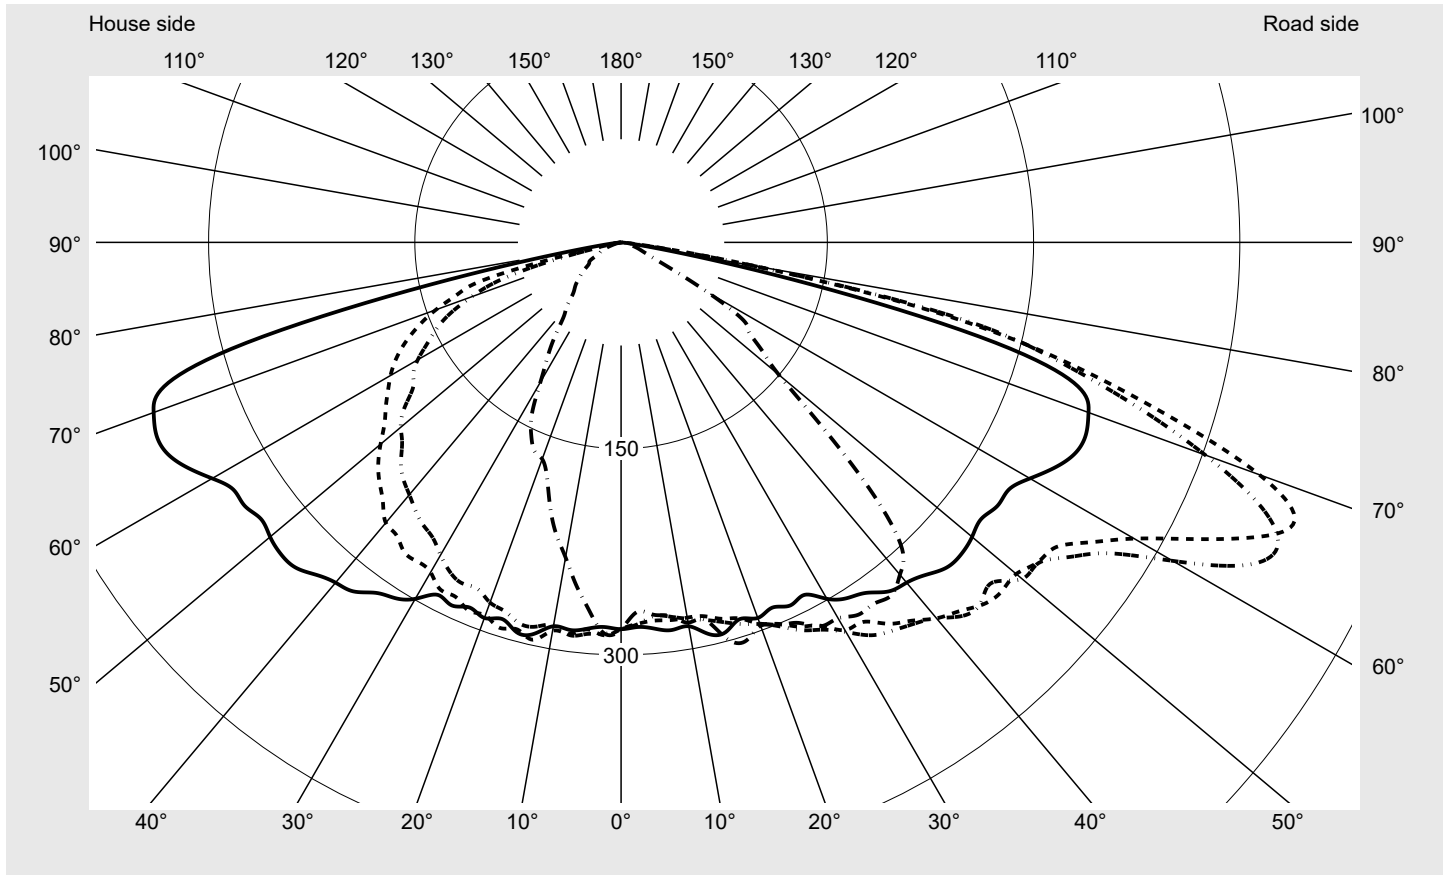

#### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

#### Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	494.0
Imax 80°	97.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


#### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> 59158_131
---	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

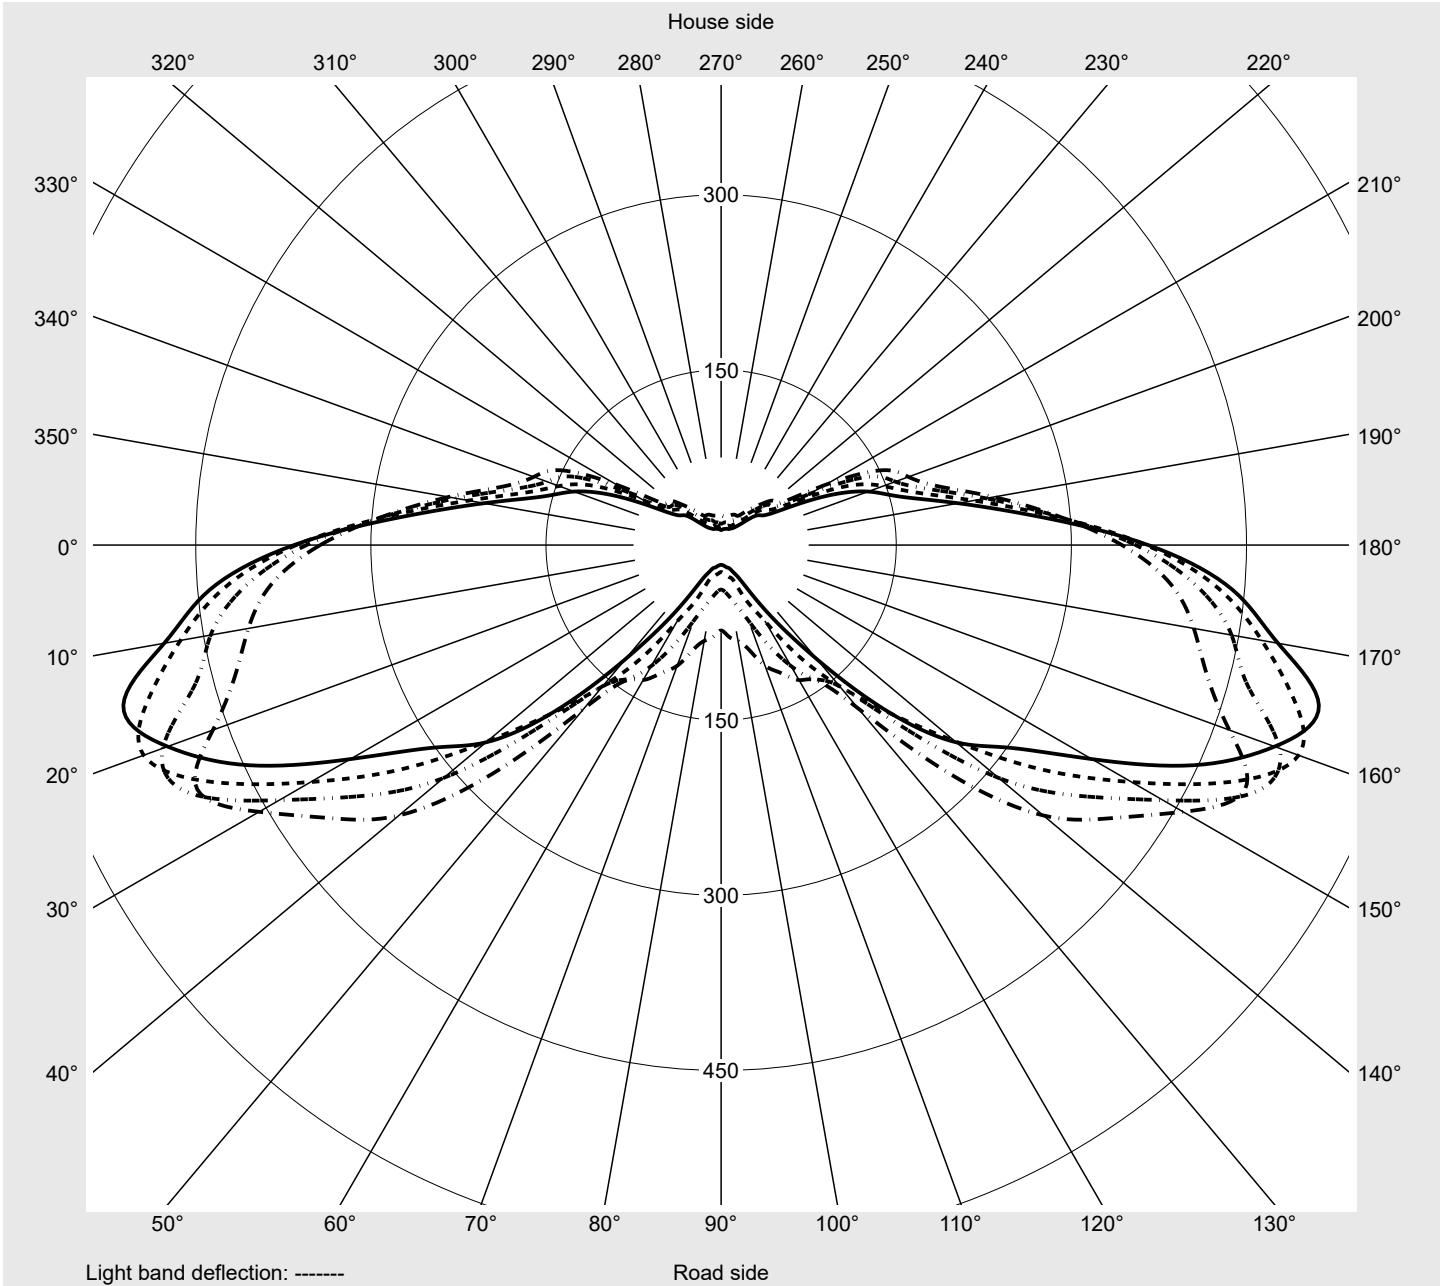

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	280.0	279.5	279.2	277.7	277.9	277.2	277.5	277.2	275.6	274.9	274.1	272.2	271.9
5,0°	282.0	279.0	278.0	276.1	272.9	271.2	268.2	269.1	269.6	270.1	269.8	269.1	270.9
7,5°	284.3	282.5	280.2	277.0	274.6	269.8	270.2	271.2	274.2	276.9	275.3	277.1	278.7
10,0°	283.5	278.8	278.9	277.1	277.9	275.3	275.0	274.3	277.9	276.8	278.3	280.6	285.6
12,5°	291.5	283.0	278.6	278.5	281.2	284.6	289.1	289.5	285.3	284.2	286.1	285.7	287.3
15,0°	293.5	287.3	282.6	283.4	285.9	287.5	291.2	291.6	289.1	290.7	289.2	288.4	292.5
17,5°	287.2	283.0	284.7	286.8	291.0	295.5	294.3	295.6	291.9	292.9	293.3	291.2	291.8
20,0°	290.7	291.7	292.2	295.1	295.4	298.3	298.7	298.0	297.8	295.7	296.5	296.5	299.4
22,5°	287.5	290.7	295.2	300.3	302.4	303.2	304.2	303.3	305.0	303.4	306.4	303.6	308.2
25,0°	291.3	293.7	300.6	308.4	311.2	310.2	305.1	310.6	315.6	314.0	311.9	310.8	313.1
27,5°	289.0	299.0	309.0	314.3	317.6	319.7	315.4	321.2	315.6	313.1	310.8	312.4	317.4
30,0°	299.3	307.0	319.6	325.6	327.2	326.9	321.7	323.1	317.8	323.1	319.9	314.6	319.2
32,5°	306.6	316.1	327.3	327.3	338.8	336.8	328.0	332.2	327.0	328.7	324.9	323.3	321.4
35,0°	311.1	323.0	331.4	338.6	344.6	341.3	340.8	340.2	334.2	335.6	333.1	338.0	343.9
37,5°	319.9	329.0	340.9	346.8	349.7	351.4	343.0	340.3	343.7	357.2	349.0	349.3	350.7
40,0°	323.1	341.3	350.9	356.9	356.9	355.3	348.8	348.2	355.8	358.7	355.6	359.4	347.1
42,5°	328.0	352.6	360.8	363.9	368.3	358.2	356.2	364.4	370.1	370.9	367.6	359.1	344.9
45,0°	334.6	357.9	364.8	372.3	370.2	361.6	366.2	373.8	385.7	385.3	368.9	360.6	349.9
47,5°	335.6	361.2	371.9	375.5	366.2	374.6	379.7	390.8	395.5	392.9	373.7	358.5	330.6
50,0°	333.2	358.6	375.4	375.2	380.7	383.0	391.4	407.7	423.6	398.5	367.7	329.8	282.7
52,5°	330.3	358.8	373.2	382.1	382.9	396.7	409.7	434.6	441.4	401.3	350.0	291.1	233.7
55,0°	334.1	363.5	378.1	386.3	398.8	423.8	441.5	441.1	420.3	385.7	309.2	234.7	184.4
57,5°	334.5	363.0	386.9	405.8	420.8	451.3	460.8	432.9	394.6	333.1	244.9	182.0	145.6
60,0°	343.4	386.8	411.2	430.9	463.3	495.1	456.9	407.8	360.3	277.0	182.7	141.5	133.5
62,5°	355.2	409.6	444.0	467.2	508.8	502.5	436.9	374.5	310.3	220.8	158.1	140.1	119.6
65,0°	363.9	427.8	470.2	507.6	526.4	480.2	405.9	335.1	261.4	202.9	157.6	116.6	75.7
67,5°	365.9	439.7	484.4	530.1	504.6	446.2	366.6	302.8	262.8	201.3	127.5	74.5	38.3
70,0°	361.8	427.3	480.7	494.0	452.1	390.2	353.2	342.1	271.3	160.9	82.6	40.8	21.3
72,5°	348.5	390.9	432.9	414.9	389.5	361.2	397.1	367.5	221.1	100.7	40.3	20.0	14.8
75,0°	281.9	295.0	323.9	333.1	324.9	367.7	367.8	233.4	109.1	39.6	15.4	12.6	11.4
77,5°	143.0	161.3	198.8	233.5	244.3	250.6	175.4	81.5	27.2	12.1	10.0	8.7	7.3
80,0°	40.2	63.0	91.1	97.3	95.2	86.7	27.8	12.7	6.5	6.7	7.5	5.6	4.2
82,5°	8.8	13.8	20.6	21.5	16.3	17.5	5.0	3.3	2.6	3.3	3.9	2.7	2.0
85,0°	1.2	1.3	1.5	1.6	1.4	1.7	1.3	1.2	1.1	0.9	1.1	0.8	0.7
87,5°	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	272.1	269.9	267.0	268.1	268.5	269.0	281.4	284.1	286.0	285.0	286.1	285.9	287.0
5,0°	269.3	272.2	271.3	271.9	270.8	271.9	283.4	282.6	282.5	285.9	285.5	283.5	281.1
7,5°	280.9	281.1	280.2	277.5	274.1	274.1	286.0	287.6	287.0	288.0	286.8	283.0	277.5
10,0°	287.1	285.1	283.0	280.7	279.3	280.8	287.8	290.8	286.8	282.7	279.5	273.9	268.3
12,5°	285.5	284.2	286.0	288.9	286.6	281.0	295.5	295.8	296.0	286.2	277.7	269.6	261.9
15,0°	292.0	290.2	289.8	292.0	297.5	298.6	293.5	294.0	291.5	286.7	277.3	264.8	251.5
17,5°	294.8	294.5	298.3	293.0	297.4	303.5	292.3	293.3	293.9	281.3	267.6	258.9	240.9
20,0°	299.0	299.5	304.2	296.9	296.7	296.7	294.8	297.3	288.7	278.8	264.7	247.9	234.6
22,5°	307.0	303.9	307.2	305.2	303.5	301.1	292.3	292.7	289.8	272.7	253.1	235.2	224.2
25,0°	308.5	307.0	306.5	307.6	304.1	305.3	288.3	287.7	284.5	273.6	248.9	229.8	214.2
27,5°	309.7	310.9	309.1	310.5	312.1	314.7	284.8	292.0	284.6	269.9	246.9	218.6	204.8
30,0°	318.8	313.0	316.5	319.3	321.1	315.6	288.4	288.0	277.1	262.6	236.5	216.2	195.1
32,5°	328.3	327.3	324.1	328.0	321.7	321.1	292.1	283.3	275.4	254.8	232.4	204.0	187.3
35,0°	333.0	330.3	327.3	330.3	321.0	320.8	293.4	280.5	274.9	250.9	222.6	198.5	180.2
37,5°	347.6	338.1	337.0	331.1	320.5	323.3	300.7	280.1	268.4	245.7	215.7	189.0	173.6
40,0°	336.7	326.6	325.9	326.6	319.5	315.5	299.6	275.7	266.2	239.6	208.1	184.4	173.4
42,5°	338.1	330.2	318.5	318.1	304.4	302.6	299.3	268.9	256.4	234.2	201.3	180.8	167.8
45,0°	331.0	306.8	290.4	268.8	256.0	259.8	300.8	268.3	248.2	226.4	193.0	177.1	163.8
47,5°	292.1	250.6	224.1	205.0	194.0	197.9	301.3	257.8	239.6	216.0	186.1	176.6	150.4
50,0°	230.3	192.7	175.9	164.2	151.9	149.7	291.8	255.7	228.4	209.2	179.8	170.6	134.0
52,5°	178.9	156.0	144.3	133.1	130.3	129.2	290.2	246.4	216.9	199.0	174.2	152.8	114.9
55,0°	145.4	130.5	117.0	116.4	114.2	113.5	290.0	243.5	208.9	184.8	172.7	133.8	95.4
57,5°	121.3	117.8	115.4	113.0	105.4	105.7	290.5	241.2	201.0	179.3	161.5	119.5	77.5
60,0°	120.8	110.0	93.0	83.4	79.0	73.2	288.7	237.1	193.6	170.7	151.6	103.2	63.9
62,5°	93.2	69.2	54.5	45.9	40.4	38.1	287.6	230.5	184.8	158.7	138.3	87.8	57.4
65,0°	54.2	33.9	28.7	26.2	24.3	23.1	285.3	219.6	173.6	147.8	120.0	76.2	53.1
67,5°	26.5	21.4	19.9	18.4	17.4	16.9	275.2	206.3	159.8	134.0	99.6	61.1	44.4
70,0°	17.3	16.2	15.1	13.9	13.6	13.6	271.2	190.7	143.4	115.8	76.3	41.8	37.8
72,5°	13.4	12.4	11.4	10.8	10.3	10.1	262.2	181.5	124.0	94.7	40.9	29.8	31.2
75,0°	9.9	9.0	7.8	7.7	7.0	7.0	234.3	162.3	97.6	56.0	20.7	21.7	24.4
77,5°	6.2	5.7	5.2	5.0	4.7	4.7	137.1	75.6	26.2	11.1	9.8	13.4	15.8
80,0°	3.7	3.3	3.1	3.0	2.9	2.6	42.3	12.7	5.3	5.7	5.5	8.1	8.7
82,5°	1.7	1.8	1.5	1.5	1.5	1.4	7.6	3.1	2.7	2.5	2.5	3.6	4.0
85,0°	0.7	0.7	0.6	0.6	0.5	0.6	1.3	1.2	1.1	1.1	1.0	1.1	1.0
87,5°	0.2	0.2	0.1	0.1	0.1	0.1	0.3	0.3	0.2	0.3	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	0.4	0.4
2,5°	286.8	285.3	284.3	284.7	284.2	283.3	284.6	283.3	283.5	283.7	284.6	3.3	3.8
5,0°	278.6	276.1	273.1	270.4	269.6	267.2	264.9	267.7	269.2	270.0	268.4	6.5	10.3
7,5°	270.7	265.2	261.6	259.4	254.7	252.2	249.7	249.3	251.4	252.1	251.1	9.8	20.1
10,0°	262.4	258.2	251.3	247.1	241.7	240.5	235.9	232.2	229.7	232.0	232.6	12.8	32.9
12,5°	253.0	248.1	241.3	233.4	227.8	225.9	222.1	221.1	217.0	216.2	217.6	15.9	48.8
15,0°	243.5	238.9	227.1	220.2	215.6	207.2	202.8	202.4	199.4	197.5	199.3	18.9	67.7
17,5°	230.7	224.5	216.6	207.3	197.9	192.6	186.1	186.7	184.9	178.1	179.1	21.6	89.3
20,0°	224.7	212.9	200.9	190.3	179.3	178.3	173.5	168.8	172.8	171.2	167.7	24.4	113.7
22,5°	214.9	197.6	181.9	175.8	167.5	170.4	169.4	167.1	165.9	164.7	164.5	27.1	140.8
25,0°	197.9	180.7	172.8	169.2	165.1	160.8	159.9	160.1	158.1	157.3	154.6	29.8	170.6
27,5°	187.3	175.1	165.8	162.0	159.3	153.5	151.8	145.8	145.0	142.8	140.4	32.4	203.0
30,0°	177.2	171.0	166.6	158.9	151.2	143.8	132.7	128.8	124.3	120.6	117.3	35.0	238.0
32,5°	172.7	165.1	158.2	150.4	138.9	130.3	117.7	112.6	105.8	101.8	100.1	37.5	275.5
35,0°	173.7	161.0	152.4	138.3	123.5	111.2	100.8	90.8	89.5	87.5	84.7	39.9	315.4
37,5°	166.8	154.7	137.1	122.9	105.2	92.7	86.3	81.1	76.6	73.0	69.0	42.2	357.6
40,0°	159.6	145.5	123.8	107.7	92.7	82.7	77.8	70.9	66.2	62.7	61.7	44.1	401.8
42,5°	150.3	129.1	106.2	93.0	85.0	75.6	70.1	65.3	59.6	54.9	52.8	46.0	447.8
45,0°	137.4	114.1	93.1	85.0	75.9	66.1	59.6	54.8	50.9	50.0	47.9	47.0	494.8
47,5°	124.3	96.6	84.4	75.5	64.4	54.9	48.4	46.6	45.4	44.6	44.2	46.6	541.4
50,0°	105.0	86.9	74.5	66.3	55.3	47.4	42.9	41.6	41.5	39.7	39.3	46.0	587.4
52,5°	89.2	76.5	63.7	53.4	45.8	41.0	37.8	37.7	35.4	34.8	35.4	45.4	632.9
55,0°	75.3	68.1	53.2	44.9	38.3	35.9	34.0	34.1	32.0	31.4	29.8	44.7	677.6
57,5°	64.5	56.8	45.7	39.7	34.2	32.8	30.9	30.2	29.1	28.8	27.4	44.0	721.6
60,0°	59.0	50.3	41.2	33.9	28.9	28.5	27.6	26.2	25.5	24.9	25.3	43.4	765.0
62,5°	53.6	44.6	34.6	28.4	25.6	23.6	22.6	20.3	19.8	18.9	18.3	42.0	807.0
65,0°	47.4	37.5	28.0	23.1	19.9	17.9	17.8	16.5	16.2	16.0	16.2	40.3	847.3
67,5°	39.3	28.4	21.3	17.9	16.3	15.1	14.9	14.3	14.0	13.4	12.8	38.3	885.6
70,0°	31.7	19.8	16.1	15.1	13.5	11.7	11.5	11.5	11.1	11.0	10.7	35.8	921.3
72,5°	24.4	15.2	12.7	11.7	10.5	9.3	8.6	8.1	7.7	7.5	7.3	32.3	953.6
75,0°	17.7	11.9	10.0	8.9	7.9	6.4	5.3	5.0	5.2	5.0	4.8	25.5	979.1
77,5°	11.6	7.9	6.4	5.8	4.8	3.7	3.2	3.1	2.9	2.5	2.7	14.3	993.4
80,0°	6.9	4.8	3.4	2.9	2.3	1.7	1.3	1.2	0.9	1.0	1.1	5.1	998.5
82,5°	3.1	2.0	1.3	1.1	0.9	0.4	0.4	0.4	0.4	0.4	0.3	1.3	999.7
85,0°	0.8	0.7	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	999.9
87,5°	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	19980	151.2	156.8	154.0
95	94	18990	142.1	147.2	144.6
90	88	17969	133.1	137.9	135.5
85	82	16926	124.1	128.5	126.3
80	77	16031	116.5	120.7	118.6
75	71	14930	107.5	111.3	109.4
70	66	13996	100.2	103.6	101.9
65	61	13051	92.7	96.1	94.4
60	55	11891	83.9	86.8	85.4
55	50	10908	76.7	79.3	78.0
50	45	9905	69.5	71.7	70.6
46	41	9092	63.6	65.8	64.7
40	36	8056	56.4	58.2	57.3
35	31	7006	49.1	50.7	49.9
30	26	5938	41.9	43.3	42.6
25	22	5072	36.2	37.3	36.8
20	17	3976	29.1	30.0	29.6
15	13	3085	23.4	24.0	23.7
12	10	2412	19.2	19.7	19.4

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	20660	153.0	158.6	155.8
95	94	19602	143.8	148.9	146.4
90	88	18515	134.7	139.5	137.1
85	83	17596	127.0	131.6	129.3
80	77	16469	117.9	122.1	120.0
75	72	15508	110.4	114.3	112.4
70	67	14537	103.0	106.6	104.8
65	61	13356	94.0	97.3	95.6
60	56	12352	86.6	89.5	88.0
55	51	11337	79.2	81.9	80.6
50	46	10305	71.8	74.3	73.0
45	41	9259	64.5	66.7	65.6
40	36	8195	57.2	59.1	58.2
36	32	7337	51.3	53.0	52.2
30	27	6250	44.1	45.5	44.8
25	22	5145	36.8	37.9	37.3
20	17	4030	29.5	30.4	30.0
15	13	3125	23.8	24.4	24.1
12	10	2442	19.5	20.0	19.8

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	20350	152.1	157.7	154.9
95	94	19324	142.9	148.0	145.4
90	88	18267	133.8	138.7	136.2
85	83	17372	126.2	130.8	128.5
80	77	16272	117.2	121.4	119.3
75	72	15331	109.7	113.6	111.6
70	66	14188	100.8	104.3	102.6
65	61	13221	93.3	96.7	95.0
60	56	12235	86.0	88.9	87.4
55	51	11236	78.7	81.4	80.1
50	46	10218	71.3	73.8	72.6
45	41	9186	64.1	66.2	65.2
40	36	8135	56.8	58.6	57.7
35	31	7072	49.5	51.0	50.2
31	27	6209	43.7	45.1	44.4
25	22	5114	36.5	37.6	37.0
20	17	4007	29.3	30.2	29.8
15	13	3109	23.6	24.2	23.9
12	10	2429	19.4	19.9	19.6

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7M33A08NB</b> <b>EAN: 4058352683613</b>	<b>LP number</b> <b>59158_131</b>
---	--	--------------------------------------

**Luminousfluxs table** **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	19980.0	151.2
5.0	20660.0	153.0
15.0	20350.0	152.1