

## Photometric test report

**Family**  
**Streetlight 11 midi LED**

**Order number: 5XC3A41Y08ME**  
**EAN: 4058352856321**

**LP number**  
**58293\_294**



**Version** post-top or side-entry mounting, Smart Interface up/down  
**Optic** asymmetric, wide distribution (ST1.2a)  
**Cover** transparent, PMMA  
**Lamps** LED 4000 K | CRI ≥ 70  
**Controlgear** EVG SITECO iQ - Smart Interface  
**Rated values** Net luminous flux = 18900 lm  
 Power consumption = 122.6 W  
 Luminous efficacy = 154.2 lm/W

**serial**  
**documentation**  
**03.07.2023**

**siteco**

**Luminous intensity in cd/klm**


**C180-0**

**C205-25**

**C210-30**

**C270-90**

**Imax: 652 cd/klm**

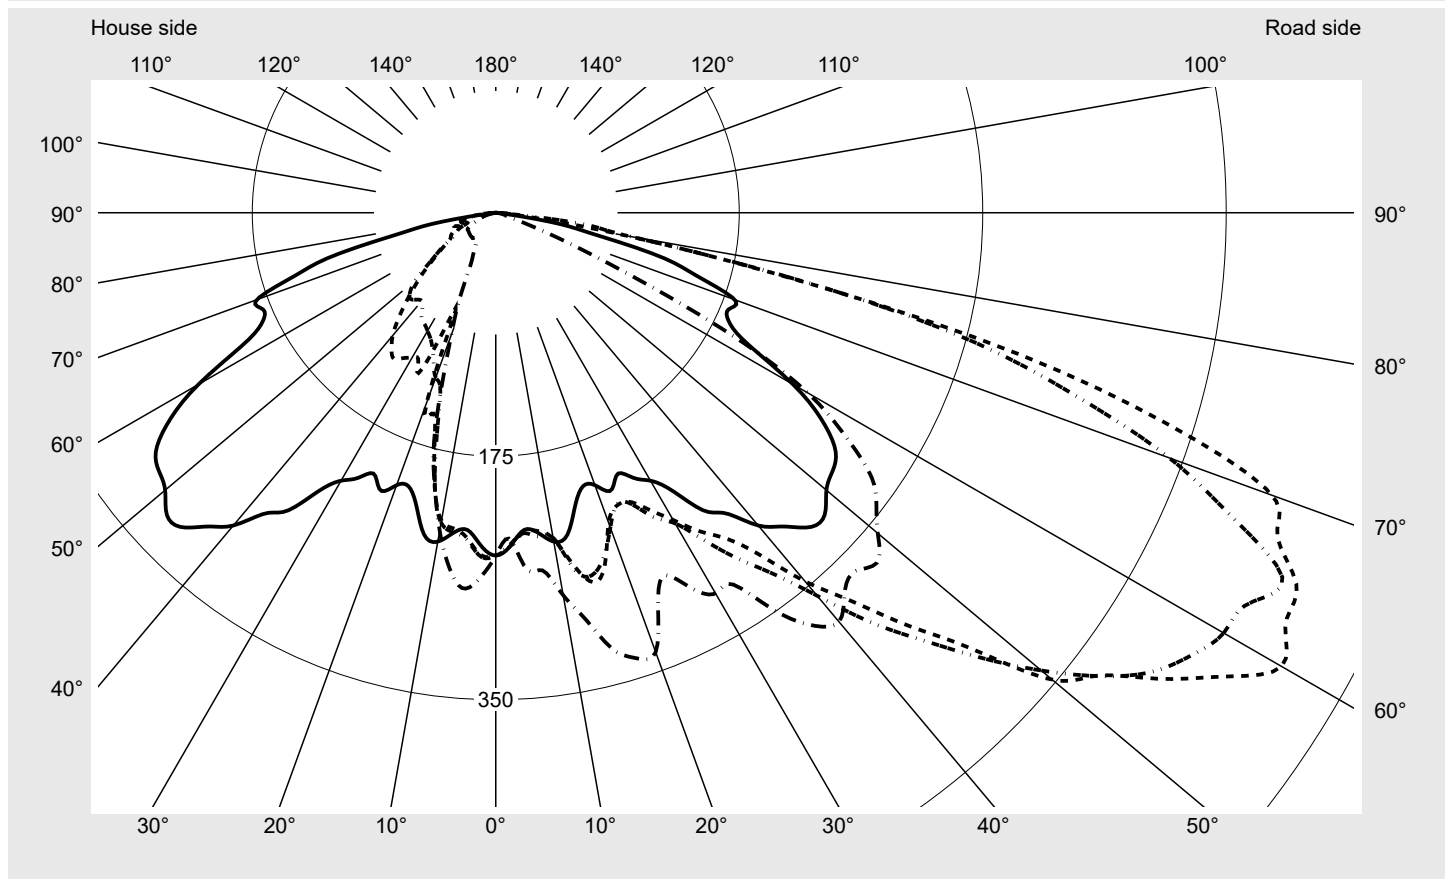

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	593.9
Imax 80°	98.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A41Y08ME</b> <b>EAN: 4058352856321</b>	<b>LP number</b> <b>58293_294</b>
--	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**



## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A41Y08ME</b> <b>EAN: 4058352856321</b>	<b>LP number</b> 58293_294
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	239.8	240.0	240.1	239.7	240.0	239.8	238.6	237.2	236.7	236.5	235.6	235.3	234.4
5,0°	229.1	228.4	228.7	229.6	230.3	230.5	231.2	232.4	235.4	238.5	239.7	241.9	242.5
7,5°	231.9	232.6	231.2	229.7	229.3	230.7	234.7	239.7	244.4	248.4	250.9	254.0	255.3
10,0°	240.0	245.5	244.0	240.9	238.8	237.8	236.9	240.2	245.1	251.2	258.7	264.9	272.0
12,5°	237.3	248.6	259.0	262.1	260.8	259.9	262.9	262.2	260.3	267.2	276.2	282.6	282.7
15,0°	219.3	225.4	240.1	256.9	269.9	275.0	269.3	265.6	263.3	261.3	264.6	271.9	281.1
17,5°	206.8	214.9	231.6	247.1	254.2	262.3	258.8	252.0	246.2	242.9	244.5	247.3	257.3
20,0°	208.4	221.3	226.4	230.6	233.9	237.1	240.8	248.5	251.5	245.3	240.1	242.0	254.3
22,5°	216.1	219.3	220.3	223.1	226.9	227.7	227.1	227.7	235.4	240.6	242.8	248.2	253.0
25,0°	207.1	214.4	224.2	232.5	232.6	229.4	231.1	234.6	239.8	243.8	257.3	260.7	268.7
27,5°	215.0	225.1	225.5	231.9	237.3	241.3	246.8	251.6	257.6	266.8	281.0	288.8	303.3
30,0°	222.4	233.4	237.1	242.8	250.8	255.0	257.8	266.5	281.3	295.2	308.3	320.8	334.8
32,5°	237.4	244.8	245.8	249.4	262.0	271.1	279.1	290.5	312.4	328.5	340.2	345.4	356.7
35,0°	261.6	267.3	267.7	267.3	274.5	285.1	303.6	321.6	334.8	353.0	362.6	378.3	388.1
37,5°	272.5	277.6	279.9	285.7	293.6	308.5	326.9	345.0	359.7	372.7	387.7	420.5	413.3
40,0°	293.4	297.1	299.4	309.9	319.5	345.9	359.3	367.5	382.1	408.4	414.9	433.9	441.4
42,5°	305.8	310.7	318.2	336.2	353.8	378.6	399.4	400.4	400.5	427.8	436.5	449.4	450.6
45,0°	319.6	313.1	321.5	373.8	392.3	420.0	434.8	431.2	434.8	457.0	452.4	447.1	446.6
47,5°	320.8	309.8	325.1	385.4	419.7	463.8	473.6	464.3	469.8	469.4	456.5	443.9	445.2
50,0°	310.2	307.2	315.4	392.2	452.4	522.3	511.8	491.4	505.3	487.1	454.1	435.2	423.2
52,5°	305.1	301.6	326.9	413.0	512.4	546.3	547.1	524.7	530.1	506.6	457.9	420.1	397.8
55,0°	298.1	302.5	388.7	489.5	551.8	584.1	575.4	542.9	548.3	513.5	458.7	395.3	375.4
57,5°	278.3	306.9	409.1	507.8	582.3	620.5	592.4	554.8	536.8	492.4	436.5	370.2	343.0
60,0°	246.7	308.6	403.8	518.1	614.4	652.2	604.1	547.4	520.4	465.8	400.3	336.1	293.3
62,5°	203.8	309.3	401.4	514.5	592.8	640.0	609.1	568.3	505.6	448.4	370.3	308.4	244.7
65,0°	184.8	305.8	399.8	491.5	545.4	635.2	624.2	536.2	477.4	421.4	336.1	290.3	208.4
67,5°	181.2	300.3	385.2	455.9	537.1	608.0	573.8	499.7	429.1	379.6	303.5	252.0	174.7
70,0°	182.8	298.3	348.6	421.3	536.1	593.9	515.4	439.2	393.7	335.0	261.7	204.6	153.3
72,5°	152.3	295.2	340.0	415.6	464.5	507.8	436.8	365.4	336.0	281.8	215.0	165.1	137.1
75,0°	123.4	244.9	296.2	319.8	343.4	381.6	351.0	272.8	224.7	206.6	172.7	145.5	127.0
77,5°	74.5	181.8	192.1	227.4	191.9	217.5	221.5	172.7	139.2	141.8	115.3	105.6	88.0
80,0°	47.1	60.2	72.3	86.8	96.2	97.8	98.2	98.9	96.2	95.3	52.2	40.0	30.9
82,5°	9.3	12.5	13.4	18.9	18.9	29.8	65.1	93.0	67.0	41.5	23.5	16.6	10.9
85,0°	3.5	3.3	3.7	4.4	5.5	7.4	9.6	16.6	11.6	10.1	9.4	7.2	6.3
87,5°	2.3	2.4	2.6	2.9	3.1	3.3	3.6	4.1	4.4	4.0	3.8	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A41Y08ME</b> <b>EAN: 4058352856321</b>	<b>LP number</b> <b>58293_294</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	234.1	233.5	232.9	233.4	234.2	235.0	241.0	242.5	243.2	244.5	246.1	247.4	248.1
5,0°	244.3	246.1	247.2	250.8	255.4	257.5	231.6	232.2	232.8	232.6	234.9	236.2	234.4
7,5°	259.1	260.3	263.4	262.6	260.8	259.4	230.1	229.9	228.3	227.7	229.0	231.6	231.0
10,0°	272.7	271.8	271.6	272.6	275.4	279.2	233.5	228.8	225.7	223.4	224.7	226.2	223.3
12,5°	285.6	286.2	290.0	295.9	298.0	299.6	227.2	221.3	214.0	207.4	202.7	202.1	203.7
15,0°	282.9	288.2	301.7	314.1	320.8	324.6	210.7	201.6	193.5	182.8	169.7	162.8	156.0
17,5°	275.5	290.1	300.8	317.3	329.9	335.7	199.0	192.5	185.9	171.1	151.0	132.5	124.4
20,0°	266.9	281.0	296.7	311.8	330.4	336.1	198.2	187.6	172.6	163.2	145.4	126.2	113.8
22,5°	264.4	276.4	296.7	308.8	307.9	304.8	194.5	174.3	162.8	143.5	74.0	116.6	98.7
25,0°	273.7	286.6	295.4	294.2	295.9	287.6	195.6	169.8	156.1	135.8	121.1	107.6	89.5
27,5°	302.2	308.3	307.5	302.6	297.9	304.0	195.8	178.3	162.7	136.6	120.6	101.8	83.5
30,0°	338.0	331.1	312.4	313.6	311.7	315.9	207.9	188.4	165.9	142.2	120.1	98.1	77.8
32,5°	351.6	334.4	325.1	337.0	328.7	316.6	224.1	203.2	170.7	147.0	123.9	95.1	73.8
35,0°	381.8	364.5	359.3	364.4	357.6	348.7	254.1	231.6	188.3	154.7	127.9	92.7	72.5
37,5°	400.8	388.8	368.5	359.8	364.8	373.8	263.8	240.0	192.1	161.1	123.0	86.7	73.2
40,0°	426.7	407.3	369.0	349.1	366.6	383.8	284.2	250.4	192.1	160.5	115.3	82.8	76.0
42,5°	445.4	405.8	374.1	350.6	367.9	371.2	294.9	249.1	189.9	153.0	103.8	84.7	76.8
45,0°	454.6	404.8	367.5	355.3	367.9	364.9	304.7	253.4	189.5	145.6	91.7	87.2	83.4
47,5°	444.2	397.0	350.0	356.6	373.5	371.9	285.3	245.8	183.2	123.3	79.8	83.2	80.6
50,0°	415.6	363.0	328.5	334.1	367.2	358.4	246.0	208.6	170.2	99.8	69.6	75.4	71.6
52,5°	377.0	341.7	305.5	319.2	337.4	344.8	245.2	210.0	153.6	79.9	59.0	62.0	59.4
55,0°	340.5	305.9	280.1	284.6	312.2	329.0	268.2	186.1	136.3	60.7	50.5	52.1	51.7
57,5°	304.7	261.3	234.1	233.3	280.3	297.2	220.2	138.9	101.2	52.2	43.1	44.3	44.4
60,0°	272.4	224.3	180.1	188.5	239.8	259.0	182.4	107.2	73.6	47.7	37.8	36.3	38.0
62,5°	220.8	167.7	135.7	140.5	177.7	194.5	144.0	86.7	60.7	46.5	36.4	32.0	31.7
65,0°	173.8	118.9	93.3	100.8	117.9	110.3	115.5	69.8	50.4	41.5	34.4	30.3	28.6
67,5°	127.0	81.4	58.3	50.3	53.2	55.8	112.4	66.9	43.1	33.6	31.4	26.8	22.4
70,0°	110.0	67.0	36.1	23.4	24.0	23.7	111.5	64.4	43.1	30.9	28.2	21.7	19.7
72,5°	95.0	38.0	20.3	11.1	10.3	9.3	90.0	56.0	44.0	38.4	31.8	23.7	19.8
75,0°	83.9	21.9	12.7	8.3	7.2	7.1	63.0	53.1	47.7	34.4	29.9	25.7	18.1
77,5°	31.9	15.2	9.0	6.5	5.7	5.5	54.2	48.4	47.2	30.9	25.1	22.1	16.2
80,0°	14.1	9.7	6.4	5.0	4.4	4.2	36.4	35.4	29.8	22.2	19.6	18.2	16.2
82,5°	9.0	6.6	4.7	3.7	3.2	3.1	9.7	11.3	14.2	14.6	15.4	11.1	10.4
85,0°	5.2	3.9	2.9	2.3	1.9	1.7	3.1	3.1	3.2	3.3	3.4	3.5	3.5
87,5°	3.0	2.2	1.5	1.2	1.0	1.0	2.2	2.0	2.0	2.0	1.9	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A41Y08ME</b> <b>EAN: 4058352856321</b>	<b>LP number</b> 58293_294
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	0.4	0.4
2,5°	249.5	252.2	254.7	257.5	259.7	261.3	261.3	261.3	262.1	262.4	262.8	2.9	3.3
5,0°	231.6	233.6	237.0	241.2	245.2	249.9	256.6	263.5	269.0	271.4	271.0	5.8	9.1
7,5°	225.8	225.3	227.9	229.8	234.2	239.7	243.5	246.5	250.9	255.1	256.9	8.6	17.7
10,0°	214.9	206.6	211.0	211.6	215.6	218.1	225.4	229.7	234.1	233.6	232.1	11.4	29.1
12,5°	205.5	194.6	195.1	193.5	195.4	200.0	205.8	215.1	216.6	206.7	202.2	14.2	43.3
15,0°	155.4	160.1	160.7	158.6	157.5	160.9	168.0	169.1	179.2	173.9	171.9	15.8	59.1
17,5°	121.8	123.5	125.8	124.8	119.6	125.9	127.1	123.3	124.5	126.5	127.6	16.7	75.9
20,0°	106.9	108.0	108.3	102.2	91.8	85.2	85.0	83.3	89.9	94.2	93.3	17.8	93.7
22,5°	90.5	90.6	95.5	88.8	77.0	70.1	67.6	63.8	62.9	62.6	70.1	18.6	112.3
25,0°	76.4	77.8	84.5	74.0	71.7	64.2	62.0	54.8	48.0	44.9	46.3	20.3	132.7
27,5°	68.7	60.3	56.3	57.6	57.9	53.0	52.5	44.8	39.0	37.0	36.1	22.7	155.4
30,0°	65.1	58.5	54.4	51.3	46.7	43.1	39.1	38.0	34.6	31.9	30.8	25.7	181.1
32,5°	63.3	57.4	53.7	46.9	39.3	34.9	32.3	30.9	29.7	28.1	26.3	28.9	210.0
35,0°	65.2	58.8	52.1	43.5	36.9	31.4	28.3	26.5	25.1	24.5	24.1	33.2	243.2
37,5°	66.6	58.3	50.3	42.4	36.2	31.2	26.4	24.9	23.6	24.2	23.4	36.8	280.0
40,0°	70.0	59.1	50.2	41.5	33.5	27.6	25.6	24.3	24.1	24.1	23.4	40.8	320.8
42,5°	71.2	59.5	50.3	40.5	32.6	27.3	24.6	24.4	24.3	23.8	24.8	44.5	365.3
45,0°	74.6	61.9	46.1	36.6	31.9	28.1	24.6	24.3	24.1	24.3	24.5	48.0	413.3
47,5°	70.1	55.1	41.9	34.0	30.1	27.6	24.8	24.2	24.2	24.2	24.6	50.6	463.9
50,0°	58.1	48.8	38.8	31.0	29.0	26.4	25.4	24.3	24.2	24.2	24.2	51.8	515.7
52,5°	49.6	43.2	33.6	28.2	25.7	25.8	25.3	24.1	24.3	24.7	24.1	53.3	569.0
55,0°	43.5	36.5	28.4	24.7	23.3	23.8	24.6	23.5	24.2	23.6	23.7	54.9	623.9
57,5°	36.2	29.1	22.9	20.4	21.4	22.1	23.1	22.7	22.9	23.1	23.6	53.9	677.8
60,0°	31.5	22.4	17.1	16.3	17.5	19.6	21.7	21.9	21.8	22.3	23.3	52.0	729.9
62,5°	25.2	17.7	13.2	12.8	14.7	17.2	19.3	19.4	19.7	20.4	20.9	49.2	779.1
65,0°	20.3	14.6	11.5	10.5	12.0	14.7	17.0	16.9	17.5	17.0	17.7	45.9	824.9
67,5°	18.1	13.7	10.7	9.4	10.0	11.5	13.5	14.1	14.8	13.6	14.4	41.9	866.8
70,0°	16.3	12.0	9.9	8.5	8.3	9.3	10.5	11.2	11.9	11.7	11.8	38.6	905.4
72,5°	14.7	10.9	8.3	7.1	6.8	7.7	8.1	8.4	9.0	9.3	9.3	34.1	939.5
75,0°	12.7	10.3	7.2	6.0	5.6	5.9	6.2	6.5	6.5	6.5	6.7	27.2	966.6
77,5°	10.4	7.6	5.8	5.1	4.5	4.1	4.4	4.6	3.7	3.2	3.1	18.1	984.8
80,0°	10.8	6.1	4.2	3.9	3.3	3.0	2.8	2.9	2.0	1.0	0.6	9.2	994.0
82,5°	7.4	4.7	3.4	2.9	2.5	2.2	1.9	1.9	1.1	0.6	0.4	4.3	998.3
85,0°	3.4	2.6	2.3	1.9	1.8	1.4	1.0	0.9	0.7	0.4	0.4	1.2	999.4
87,5°	1.6	1.5	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A41Y08ME</b> <b>EAN: 4058352856321</b>	<b>LP number</b> 58293_294
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18900	122.6	130.2	126.4
95	241	252	17933	115.1	122.2	118.6
90	229	250	17040	108.3	114.9	111.6
85	216	248	16072	101.2	107.3	104.2
80	203	246	15105	94.2	99.9	97.1
75	190	243	14138	87.4	92.7	90.1
70	178	241	13245	81.4	86.3	83.8
65	165	238	12278	74.8	79.3	77.0
60	152	235	11310	68.4	72.5	70.4
55	140	232	10417	62.6	66.4	64.5
50	127	229	9450	56.3	59.7	58.0
45	114	225	8483	50.2	53.2	51.7
40	102	221	7590	44.7	47.3	46.0
35	89	216	6622	38.8	41.0	39.9
30	76	210	5655	33.0	34.9	34.0
25	63	203	4688	27.3	28.9	28.1
20	51	195	3795	22.2	23.5	22.8
15	38	184	2828	16.7	17.6	17.2
13	33	179	2456	14.7	15.4	15.0