


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST1.0a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 21550 lm Power consumption = 136.6 W Luminous efficacy = 157.8 lm/W	serial documentation 09.08.2023



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 489 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	461.5
Imax 80°	96.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

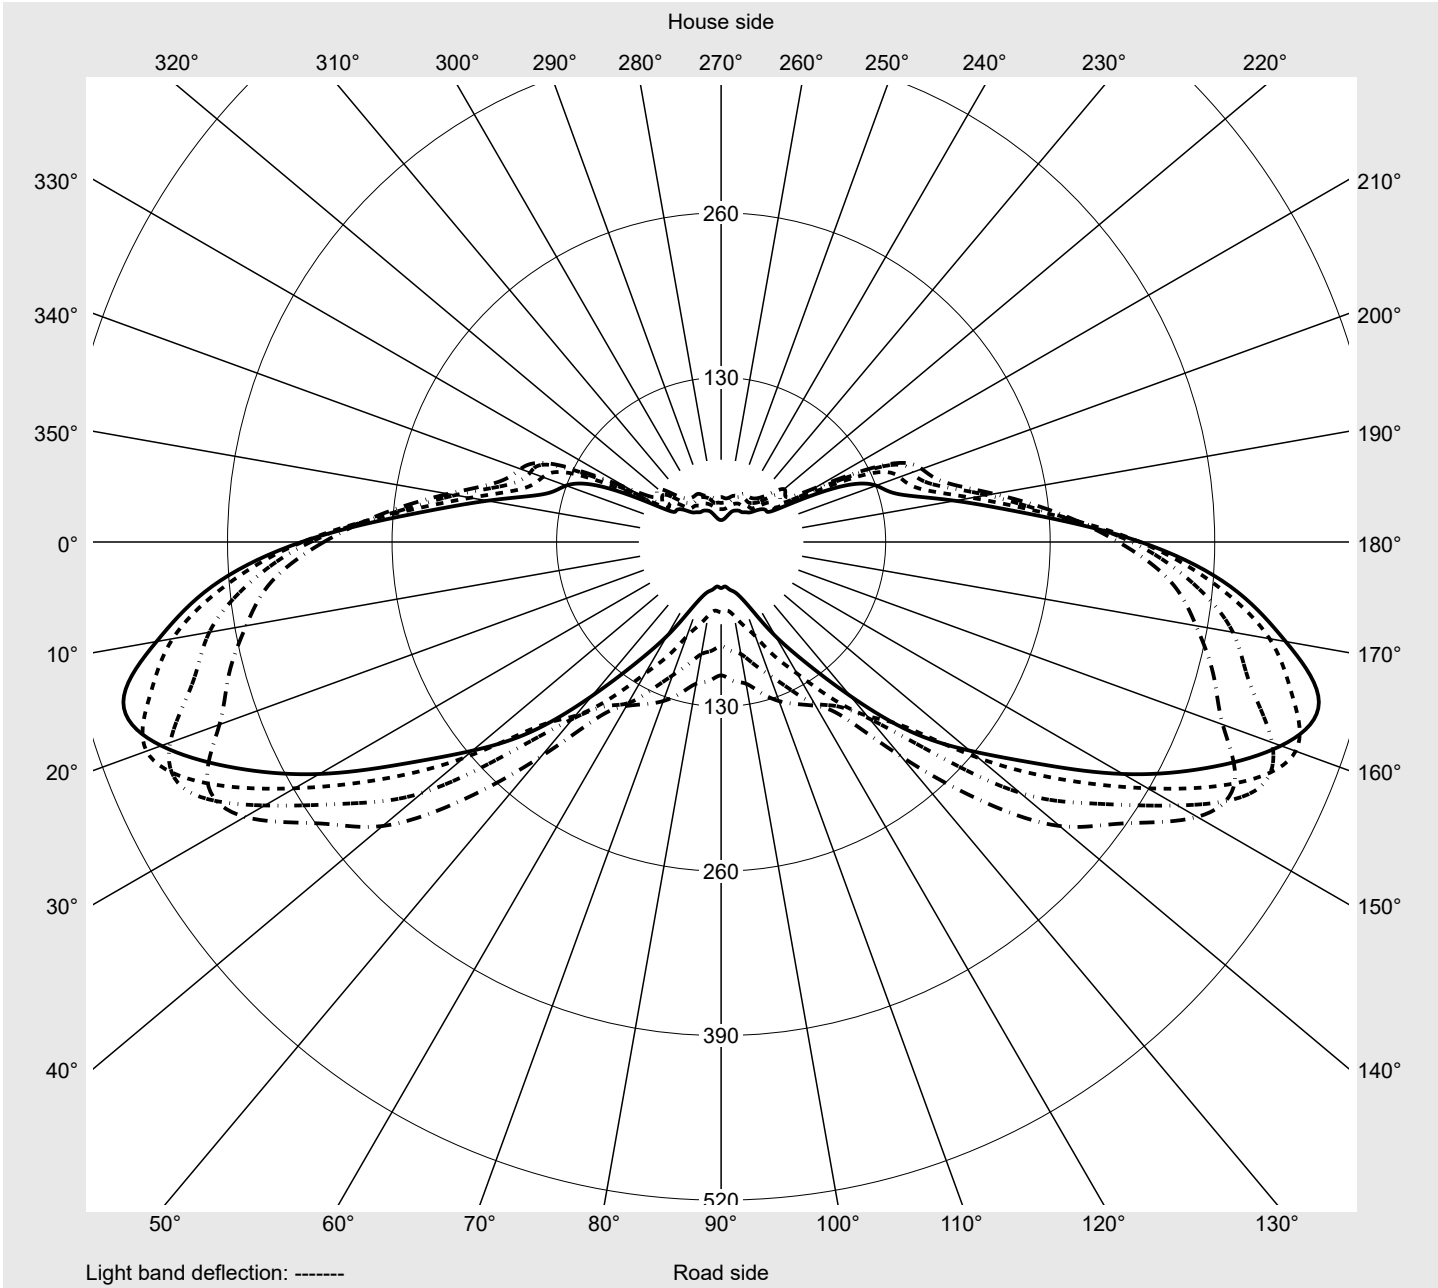

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	277.0	276.4	275.2	274.5	273.0	273.7	272.9	273.0	271.2	271.2	271.1	271.2	271.4
5,0°	274.1	274.0	274.4	271.9	270.1	269.9	268.3	270.2	270.2	270.8	270.6	270.2	268.6
7,5°	279.4	277.3	274.8	274.9	272.6	273.0	273.3	271.7	269.4	269.4	269.0	268.1	269.4
10,0°	280.5	276.6	274.8	277.0	280.8	278.6	272.2	269.6	269.1	273.3	273.9	275.3	275.6
12,5°	289.2	286.8	282.7	281.0	277.9	277.4	280.6	282.2	279.8	279.6	278.5	279.4	279.1
15,0°	288.1	289.0	288.6	282.0	281.9	284.6	284.1	287.9	291.2	290.4	290.4	287.4	286.6
17,5°	286.5	287.8	285.5	285.9	286.0	290.2	291.3	295.8	292.3	291.9	293.7	291.6	289.1
20,0°	291.5	292.4	288.6	292.7	293.0	298.5	297.4	298.5	297.9	297.2	297.4	296.1	295.5
22,5°	294.2	287.4	289.6	295.1	298.6	301.7	301.5	304.4	301.6	303.0	304.1	302.2	302.9
25,0°	290.1	291.1	297.6	301.1	304.1	306.9	304.1	310.9	311.8	314.8	310.7	306.6	305.0
27,5°	287.5	292.3	300.5	303.1	307.5	314.6	310.4	317.0	314.8	313.0	306.9	305.5	309.4
30,0°	292.0	294.2	306.8	308.2	318.6	321.3	321.7	325.9	317.9	312.7	313.6	314.2	314.2
32,5°	296.6	303.4	310.5	316.2	324.8	328.0	325.1	324.3	321.7	320.6	319.3	318.8	318.9
35,0°	293.7	307.9	314.0	322.5	330.7	330.2	333.2	331.9	324.2	323.3	323.9	327.2	329.1
37,5°	303.1	313.9	324.1	334.6	336.2	339.9	336.6	332.6	330.2	336.0	331.7	335.5	336.0
40,0°	308.1	323.2	333.3	337.1	341.8	344.1	345.3	335.2	345.8	340.1	337.1	341.4	336.8
42,5°	310.4	331.9	338.8	346.6	352.2	343.4	360.7	346.8	357.8	348.2	345.1	344.2	337.4
45,0°	314.3	336.1	345.1	351.3	352.5	350.5	355.5	355.4	363.9	365.9	352.7	349.6	341.3
47,5°	314.4	339.7	350.1	358.2	355.5	358.5	354.9	364.8	369.6	371.3	360.1	351.7	330.9
50,0°	313.6	338.4	355.7	357.1	362.9	365.7	359.9	376.6	390.1	379.0	360.1	337.0	305.4
52,5°	310.1	339.8	351.2	364.1	368.6	376.4	380.3	400.7	411.0	378.8	346.4	308.8	268.0
55,0°	309.7	336.3	357.1	363.3	377.6	395.3	407.2	415.4	395.9	359.4	318.0	267.3	223.8
57,5°	310.0	338.2	361.6	380.5	390.8	408.7	436.4	415.4	373.0	331.3	278.8	218.4	176.1
60,0°	313.9	356.4	381.1	402.5	421.8	447.8	434.4	387.7	349.1	287.7	221.2	169.0	149.6
62,5°	324.3	374.3	410.6	432.6	463.2	465.3	416.3	360.4	308.4	234.2	182.3	158.2	147.0
65,0°	330.8	392.8	440.0	467.1	483.1	450.2	389.2	326.5	265.4	207.0	179.3	149.5	120.1
67,5°	331.5	403.9	453.0	489.0	470.7	422.7	366.6	305.3	256.5	211.8	158.8	115.9	86.0
70,0°	323.2	394.9	447.7	461.5	422.9	385.2	351.0	344.3	283.9	188.9	118.3	74.2	48.5
72,5°	316.1	359.3	401.7	388.4	373.1	363.3	394.6	409.8	286.0	144.6	69.3	39.5	28.1
75,0°	244.1	257.5	289.2	299.7	316.8	366.8	438.0	374.9	196.5	72.3	32.2	23.3	21.1
77,5°	127.1	147.2	181.9	217.4	238.2	288.7	316.5	219.1	70.5	28.0	20.6	17.9	17.0
80,0°	33.5	53.0	71.3	80.0	84.1	96.1	90.3	66.5	20.1	17.3	16.8	12.6	12.6
82,5°	6.2	9.7	17.5	24.9	29.9	37.4	35.4	17.1	10.8	10.9	11.3	8.2	8.1
85,0°	1.2	1.4	2.0	2.7	3.3	4.8	5.6	4.1	4.1	4.6	5.2	4.0	3.9
87,5°	0.3	0.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1	1.2	1.5	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	271.5	272.2	271.7	270.4	271.3	272.5	277.7	275.7	275.6	274.8	274.5	271.8	269.8
5,0°	268.1	267.6	267.2	266.5	266.4	264.7	276.0	275.8	273.8	271.3	270.7	265.9	261.6
7,5°	270.3	271.6	268.7	269.2	266.8	266.3	278.8	275.9	273.3	272.2	266.5	262.4	258.5
10,0°	279.4	277.9	273.7	272.9	271.2	273.0	280.7	276.5	269.2	264.4	259.9	255.3	249.5
12,5°	278.6	280.8	279.4	279.3	278.5	273.8	288.2	284.0	274.9	264.3	256.9	253.0	246.5
15,0°	285.1	284.0	283.9	287.7	288.0	286.1	289.0	286.8	275.9	263.3	253.3	246.3	239.9
17,5°	290.0	288.1	290.0	288.8	291.7	294.1	287.2	284.3	275.6	258.5	253.6	241.8	228.9
20,0°	293.4	292.3	296.4	290.0	290.0	292.8	293.7	285.3	273.7	258.3	246.8	237.9	222.9
22,5°	298.9	295.2	298.5	293.0	293.5	293.4	291.1	289.6	273.2	253.8	240.0	225.4	215.1
25,0°	303.5	300.9	298.5	297.3	296.1	297.7	289.2	283.4	273.0	251.9	234.0	219.6	206.1
27,5°	304.9	305.2	302.5	301.1	299.3	305.5	291.3	285.0	274.1	248.8	231.4	212.9	194.9
30,0°	312.7	305.3	305.5	302.9	307.6	302.7	288.7	284.3	265.7	245.1	225.0	207.3	188.4
32,5°	319.2	313.3	310.5	312.2	306.2	306.2	283.1	279.6	263.4	240.9	219.4	196.1	184.6
35,0°	323.5	319.3	312.4	309.8	305.1	299.3	286.6	274.8	263.2	233.8	209.8	191.2	183.1
37,5°	329.9	320.0	318.1	311.8	303.1	304.5	285.3	273.8	256.8	228.8	203.4	183.6	178.0
40,0°	326.8	319.2	316.0	314.5	307.7	304.6	283.4	268.2	254.7	221.7	195.2	181.8	177.4
42,5°	328.9	324.7	313.0	313.8	302.9	300.2	281.7	262.2	243.7	213.5	188.7	181.1	170.7
45,0°	329.9	314.5	297.4	287.6	275.9	276.6	282.8	256.2	236.6	207.6	182.1	178.0	160.5
47,5°	308.8	280.5	261.8	246.2	234.1	234.1	281.8	246.6	228.8	198.6	177.3	171.6	143.5
50,0°	269.9	239.9	221.1	206.5	191.4	192.8	272.7	241.8	218.0	191.2	173.4	161.4	125.2
52,5°	227.6	201.2	180.4	164.6	155.8	152.3	269.6	232.4	205.8	183.3	167.5	141.2	105.0
55,0°	184.5	161.5	142.3	135.6	131.5	128.0	268.2	229.8	198.7	172.6	162.6	121.1	89.1
57,5°	150.6	141.1	134.8	129.7	120.0	120.9	267.6	224.3	189.9	170.2	151.9	105.1	75.3
60,0°	141.3	133.7	123.7	113.7	110.2	105.4	266.2	219.0	182.8	168.7	145.2	84.3	62.4
62,5°	128.2	112.1	99.9	90.0	86.2	82.4	261.4	213.3	174.7	160.5	141.7	72.1	56.8
65,0°	99.2	79.4	68.2	59.3	54.4	55.5	258.5	201.1	162.6	150.0	126.5	62.8	50.1
67,5°	61.3	47.3	40.9	38.1	35.3	36.4	247.6	187.6	145.7	130.3	103.1	53.3	43.3
70,0°	35.3	31.8	30.3	27.9	27.8	26.8	240.7	174.2	128.1	108.1	85.0	47.0	35.7
72,5°	25.9	25.3	24.5	22.6	23.1	21.7	230.1	158.9	112.6	89.8	64.6	36.7	31.7
75,0°	20.7	20.5	19.8	18.7	18.3	18.0	194.3	130.2	78.9	63.6	43.0	28.7	26.2
77,5°	16.6	16.2	15.3	14.6	14.3	14.6	118.7	58.0	20.8	29.3	25.7	17.5	17.8
80,0°	11.9	12.1	11.0	10.7	10.4	10.4	32.3	9.7	6.1	12.2	12.9	9.1	9.1
82,5°	8.0	7.6	7.6	7.4	6.9	6.2	5.0	2.7	2.9	3.9	4.1	3.0	1.6
85,0°	3.7	4.1	4.1	3.7	3.3	3.0	1.2	1.0	1.0	0.7	0.6	0.5	0.2
87,5°	1.1	1.3	1.2	1.1	1.0	1.0	0.3	0.2	0.2	0.2	0.1	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	0.4	0.4
2,5°	268.5	268.9	268.2	267.9	268.1	267.2	267.4	267.3	267.8	267.2	267.4	3.2	3.7
5,0°	258.3	254.5	252.2	250.1	250.6	249.2	250.4	252.1	254.6	253.9	255.1	6.3	10.0
7,5°	253.2	249.6	246.9	243.4	241.8	240.1	238.5	238.0	237.2	236.5	235.9	9.4	19.4
10,0°	246.6	241.3	236.8	232.4	231.2	227.8	225.6	222.2	220.8	221.0	221.4	12.4	31.8
12,5°	242.7	233.6	227.3	222.1	217.3	215.3	212.9	212.5	209.4	207.8	209.0	15.4	47.2
15,0°	233.0	224.6	215.3	210.9	206.2	200.4	196.3	196.0	195.2	190.0	189.7	18.4	65.6
17,5°	223.4	215.6	205.0	198.1	192.0	188.0	182.3	180.3	179.7	177.1	177.0	21.1	86.7
20,0°	214.7	202.7	194.1	186.2	181.6	179.9	175.0	171.4	172.3	169.2	166.4	23.9	110.6
22,5°	204.1	193.6	184.4	178.0	171.6	170.7	170.7	168.1	164.5	164.2	163.2	26.7	137.3
25,0°	189.5	182.2	178.9	173.9	167.7	164.7	164.2	162.4	163.3	162.0	159.6	29.4	166.7
27,5°	186.1	181.6	171.6	167.3	164.1	158.7	157.7	154.0	150.5	149.0	147.0	32.0	198.7
30,0°	181.3	178.3	168.4	164.0	159.7	154.5	144.9	141.4	133.3	128.4	127.6	34.5	233.3
32,5°	177.7	168.8	163.3	159.4	151.2	146.4	135.1	123.5	114.9	107.7	107.0	36.9	270.1
35,0°	178.3	165.2	156.5	148.1	142.4	131.6	119.3	106.1	96.7	90.9	87.8	39.0	309.1
37,5°	171.2	159.1	148.6	141.6	129.9	113.6	100.4	89.5	80.3	75.0	73.4	41.2	350.3
40,0°	161.1	148.6	139.0	131.3	114.8	96.2	81.8	73.1	68.4	65.6	64.8	43.1	393.4
42,5°	151.2	140.3	126.0	117.4	100.5	81.3	70.4	66.6	62.3	61.2	60.6	45.0	438.4
45,0°	137.4	125.8	116.7	102.3	84.9	69.6	62.1	58.5	57.5	58.4	58.8	46.2	484.6
47,5°	122.6	111.6	104.9	87.4	70.5	62.3	56.9	55.3	55.3	54.1	55.2	46.5	531.1
50,0°	105.9	101.5	94.5	74.3	62.2	56.1	53.6	51.7	51.0	50.8	49.9	46.3	577.4
52,5°	92.1	89.6	74.0	62.8	54.7	52.6	50.1	48.1	46.4	46.3	45.2	45.6	623.0
55,0°	80.1	75.2	59.7	53.1	49.2	47.3	46.2	43.5	42.4	41.7	40.8	44.6	667.6
57,5°	72.2	65.6	52.2	46.3	45.2	44.5	42.2	40.0	38.3	37.8	37.8	43.9	711.6
60,0°	64.9	53.5	45.3	42.3	42.0	42.0	39.0	37.8	35.5	34.7	35.5	43.4	755.0
62,5°	58.2	46.5	40.2	38.0	38.7	38.9	37.6	35.3	31.6	31.2	30.9	42.7	797.7
65,0°	48.5	38.6	35.4	35.0	33.2	33.2	32.2	30.1	27.6	26.1	25.9	41.1	838.8
67,5°	40.0	33.3	30.7	28.8	28.4	27.4	25.8	22.4	19.4	17.8	17.3	38.7	877.5
70,0°	33.9	28.1	26.6	25.0	23.5	19.0	16.2	11.9	9.1	7.5	6.5	36.0	913.6
72,5°	26.8	22.8	22.0	19.8	14.7	10.1	6.8	4.3	3.5	3.1	3.2	33.2	946.7
75,0°	21.1	16.5	14.5	11.7	7.0	3.9	2.7	1.7	1.5	1.6	1.9	27.1	973.8
77,5°	13.6	9.9	6.4	3.8	2.2	1.3	1.2	0.7	0.6	0.8	1.1	17.1	991.0
80,0°	5.6	2.8	1.3	0.3	0.4	0.2	0.2	0.3	0.2	0.3	0.5	6.1	997.1
82,5°	0.8	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	2.2	999.3
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21550	136.6	143.6	140.1
95	241	252	20447	128.0	134.4	131.2
90	229	250	19429	120.3	126.2	123.2
85	216	248	18326	112.0	117.6	114.8
80	203	246	17223	104.0	109.1	106.6
75	190	243	16120	96.3	101.0	98.6
70	178	241	15102	89.3	93.7	91.5
65	165	238	13999	82.0	86.0	84.0
60	152	235	12896	74.8	78.5	76.6
55	140	232	11878	68.3	71.6	69.9
50	127	229	10775	61.4	64.3	62.8
45	114	225	9672	54.6	57.3	56.0
40	102	221	8654	48.5	50.8	49.6
35	89	216	7551	42.0	44.0	43.0
30	76	210	6448	35.7	37.3	36.5
25	63	203	5345	29.6	30.8	30.2
20	51	195	4327	23.9	25.0	24.4
15	38	184	3224	18.1	18.9	18.5
10	25	169	2121	12.3	12.8	12.6

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21550	133.6	138.1	135.8
95	241	252	20447	125.4	129.6	127.5
90	229	250	19428	118.0	122.0	120.0
85	216	248	18326	110.2	113.9	112.0
80	203	246	17223	102.6	106.0	104.3
75	191	244	16205	95.7	98.9	97.3
70	178	241	15102	88.5	91.3	89.9
65	165	238	13999	81.3	83.9	82.6
60	152	235	12896	74.3	76.7	75.5
55	140	232	11878	67.9	70.1	69.0
50	127	229	10775	61.2	63.1	62.2
45	114	225	9672	54.5	56.2	55.4
40	102	221	8654	48.5	50.1	49.3
35	89	216	7551	42.1	43.4	42.8
30	76	210	6448	35.7	36.9	36.3
25	64	204	5430	30.0	31.0	30.5
20	51	195	4327	24.0	24.8	24.4
15	38	184	3224	18.2	18.7	18.4
10	26	171	2206	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
--	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21560	134.8	140.4	137.6
95	241	252	20456	126.4	131.6	129.0
90	229	250	19437	118.8	123.7	121.2
85	216	248	18334	110.9	115.4	113.2
80	203	246	17231	103.1	107.3	105.2
75	191	244	16212	96.2	100.1	98.2
70	178	241	15109	88.8	92.3	90.6
65	165	238	14005	81.5	84.8	83.2
60	152	235	12902	74.5	77.4	76.0
55	140	232	11883	68.0	70.7	69.4
50	127	229	10780	61.2	63.6	62.4
45	114	225	9676	54.5	56.7	55.6
40	102	221	8658	48.5	50.4	49.4
35	89	216	7554	41.9	43.6	42.8
30	76	210	6451	35.7	37.0	36.4
25	64	204	5432	30.0	31.1	30.6
20	51	195	4329	24.0	24.9	24.4
15	38	184	3225	18.1	18.7	18.4
10	26	171	2207	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3D31Y08NB EAN: 4058352923993	LP number 59078_246
--	--	--------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	21550.0	136.6
5.0	21550.0	133.6
15.0	21560.0	134.8