


Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
	Version standard bracket Optic asymmetric distribution PL64 Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 220410 lm Power consumption = 1540.1 W Luminous efficacy = 143.1 lm/W	serial documentation 23.08.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1021 cd/klm

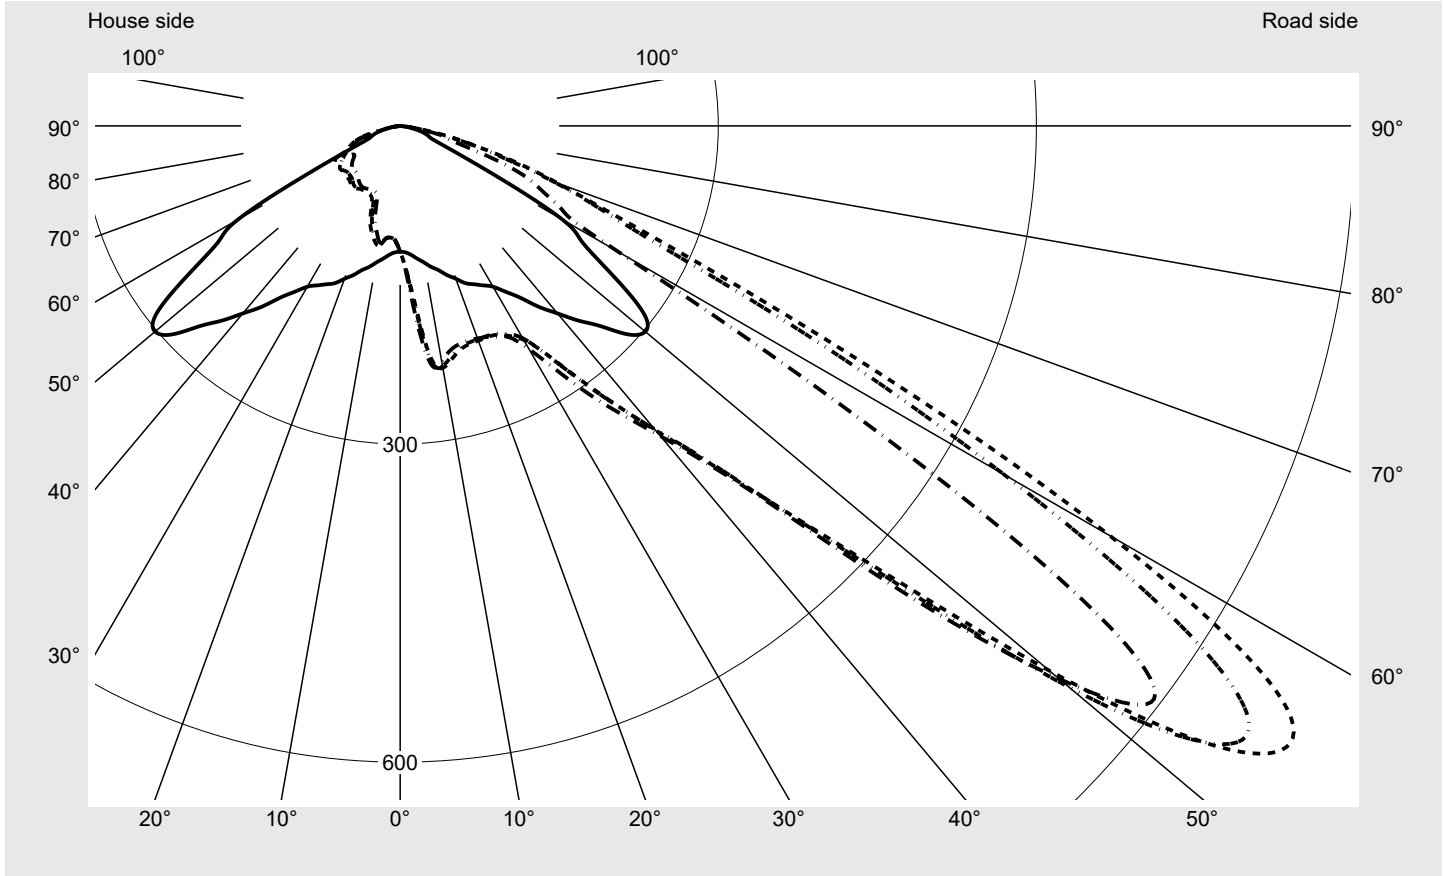

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	158.5
Imax 80°	24.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
---	--	------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52.5°** **KMK 50°** **KMK 47.5°** **siteco**

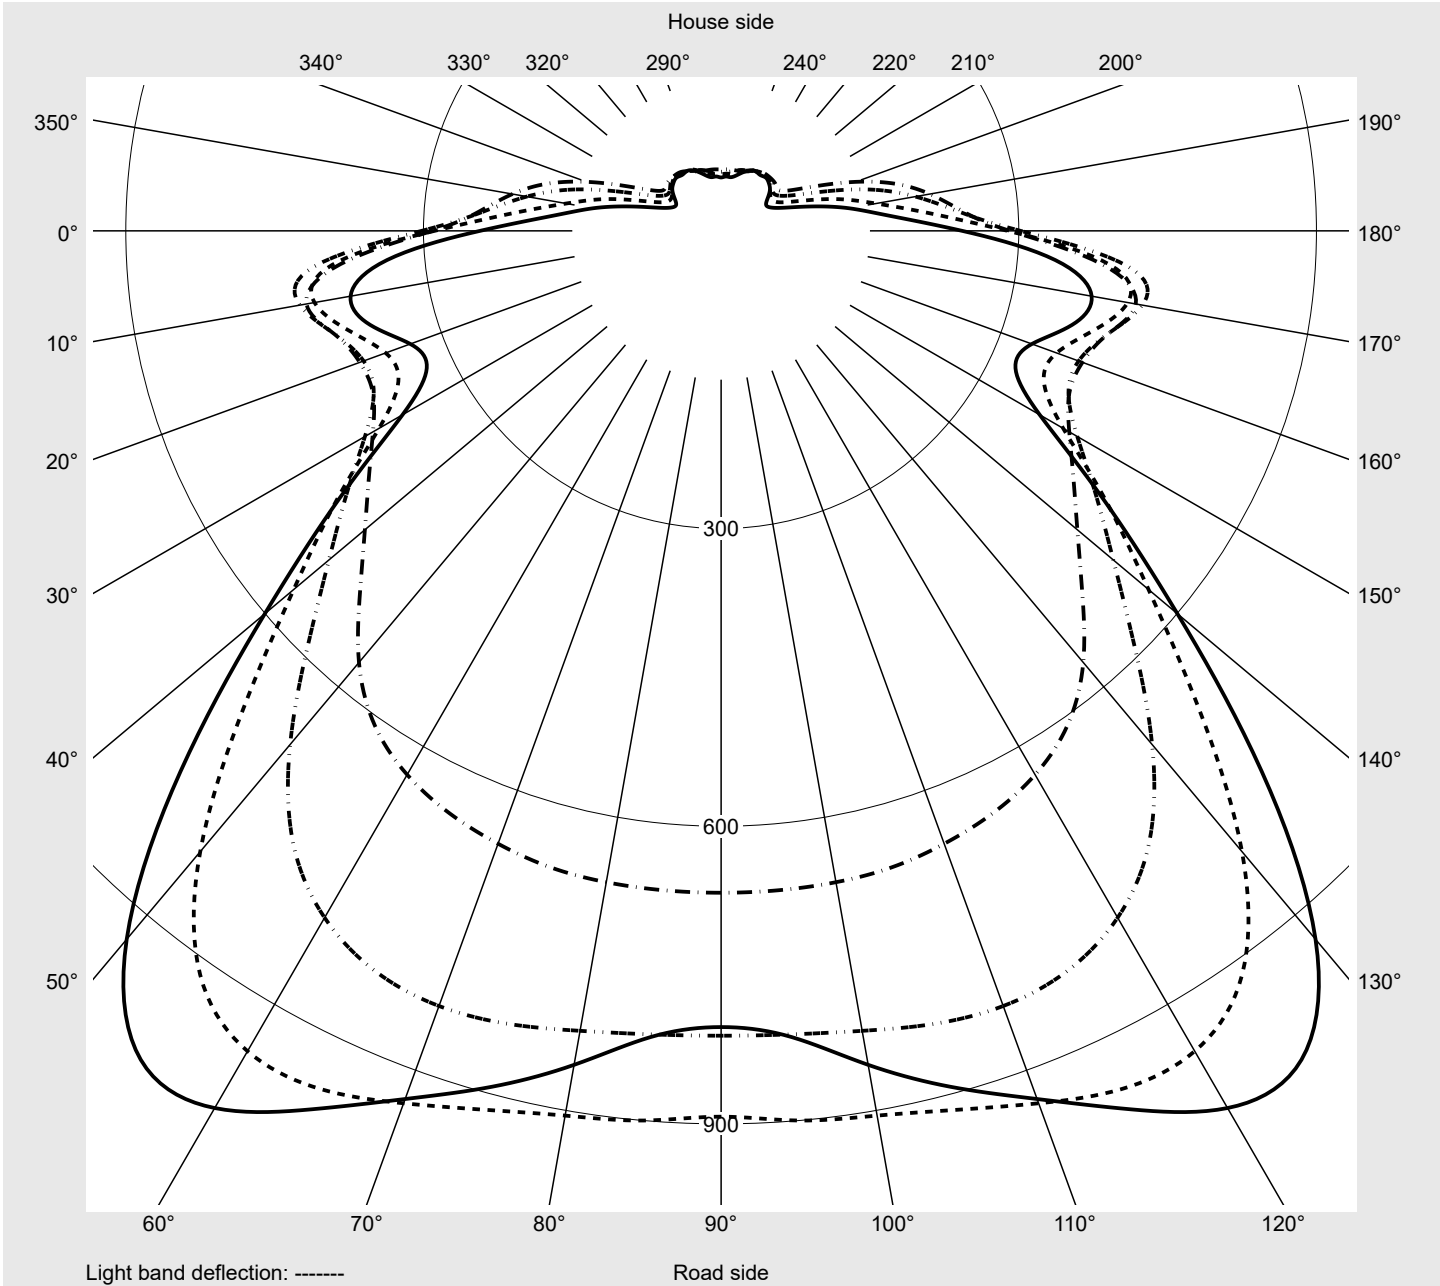

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
---	--	------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	119.5	120.9	122.4	124.1	125.8	127.4	129.0	130.6	132.2	133.6	134.9	135.9	137.0
5,0°	122.3	125.8	129.6	133.3	137.2	141.3	145.4	149.9	154.6	159.2	163.8	168.3	172.8
7,5°	126.5	132.0	138.1	144.5	151.3	159.4	168.6	179.1	190.2	200.5	209.2	215.6	220.2
10,0°	130.9	139.0	147.4	156.8	168.5	183.1	199.3	214.0	224.2	229.7	232.4	232.6	231.8
12,5°	136.3	146.7	157.8	172.0	191.1	212.1	226.7	234.2	236.2	234.5	231.6	228.3	225.3
15,0°	141.0	154.0	168.5	188.5	213.0	230.0	237.6	237.6	233.7	229.4	225.5	221.7	218.7
17,5°	147.6	162.6	180.1	207.1	229.0	239.2	238.8	234.4	229.6	225.5	221.6	218.4	215.9
20,0°	153.4	170.9	193.3	221.5	238.9	242.1	238.4	233.8	229.7	225.5	221.5	218.1	215.5
22,5°	160.5	179.7	207.1	234.4	245.6	244.2	241.1	237.7	233.5	228.3	223.1	218.8	215.5
25,0°	164.8	186.8	218.2	242.9	249.2	248.8	248.2	245.4	239.9	233.1	226.3	220.8	217.3
27,5°	169.6	194.1	227.7	248.3	253.8	257.5	259.1	255.6	248.6	240.1	232.1	226.6	223.3
30,0°	175.1	202.7	236.8	254.3	261.8	269.1	271.2	266.8	258.7	250.0	243.1	237.3	233.0
32,5°	185.6	216.2	250.3	266.9	276.4	284.4	285.7	279.4	271.3	265.4	260.3	255.3	254.0
35,0°	198.0	233.3	269.0	286.5	299.5	305.4	301.8	293.4	289.7	288.9	288.0	288.1	288.1
37,5°	215.2	255.7	292.3	314.0	330.8	328.0	314.6	310.7	315.3	321.3	326.6	328.3	328.4
40,0°	230.8	280.3	323.6	349.8	357.7	344.6	332.6	335.8	347.0	361.7	372.5	376.1	375.0
42,5°	249.1	308.5	362.0	378.6	371.0	360.8	358.1	365.9	384.0	406.1	425.1	432.5	430.8
45,0°	267.0	343.3	395.4	393.0	380.0	376.1	384.1	400.6	425.2	456.4	489.1	508.7	514.6
47,5°	290.9	385.2	424.4	403.1	387.5	387.2	405.2	433.4	468.7	514.7	567.8	608.5	632.9
50,0°	301.8	411.6	431.0	402.8	383.5	386.3	414.5	460.4	516.0	588.4	675.8	752.3	799.3
52,5°	288.8	393.5	416.1	388.3	359.8	358.9	398.1	473.0	562.4	681.0	816.7	915.4	954.6
55,0°	242.9	338.1	379.2	366.2	333.3	327.3	370.8	469.1	600.3	770.6	932.0	1019.8	1020.8
57,5°	203.2	264.4	322.8	325.6	307.1	308.2	353.7	473.3	645.9	816.0	952.7	1011.0	967.8
60,0°	176.9	218.8	282.7	301.7	302.6	320.1	369.6	512.6	680.9	794.2	870.1	863.1	772.6
62,5°	100.6	147.9	213.6	250.4	276.8	321.6	416.7	580.8	682.3	701.5	658.3	589.3	526.4
65,0°	52.2	75.3	126.0	166.1	202.5	264.7	379.0	503.6	557.9	482.0	403.1	361.8	327.9
67,5°	33.4	45.5	77.7	114.5	140.6	173.8	233.5	302.4	314.1	261.9	219.3	214.6	215.7
70,0°	28.7	34.1	45.8	69.0	93.0	107.1	129.9	149.4	153.2	125.9	115.4	137.6	158.5
72,5°	25.2	28.2	29.2	34.1	48.0	59.5	67.5	60.0	40.3	46.0	63.2	93.8	115.2
75,0°	20.6	22.2	23.2	28.6	30.2	39.7	42.5	26.8	29.1	36.0	44.1	60.6	76.0
77,5°	14.1	15.7	16.9	21.3	23.0	28.4	27.9	21.0	21.6	26.1	29.9	41.2	49.7
80,0°	9.2	10.0	12.2	14.4	17.3	18.2	18.2	15.6	14.4	17.4	17.5	22.6	24.0
82,5°	5.5	6.1	8.1	9.6	11.7	12.6	11.7	10.1	8.6	9.8	9.7	9.9	10.0
85,0°	2.5	3.0	4.2	5.3	6.0	6.3	5.6	4.6	3.6	2.8	2.7	2.8	3.0
87,5°	0.9	1.1	1.3	1.4	1.5	1.4	1.2	1.0	0.9	0.8	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	138.0	138.7	139.3	140.0	140.8	140.9	117.9	116.5	115.3	114.2	113.1	112.3	111.5
5,0°	176.8	180.1	183.0	185.2	187.0	187.5	119.2	116.4	114.1	112.2	110.6	109.4	108.5
7,5°	223.1	225.2	226.1	226.7	227.2	227.5	121.5	117.5	114.4	112.0	110.5	109.5	108.6
10,0°	230.2	228.7	227.2	226.2	225.6	225.7	124.0	118.8	115.2	113.0	111.5	110.5	109.9
12,5°	222.6	220.6	218.9	217.8	217.0	217.1	127.0	120.4	116.4	114.3	113.1	113.5	115.7
15,0°	216.5	215.1	214.1	213.3	212.9	213.3	129.6	121.8	117.7	115.8	116.6	119.5	120.5
17,5°	214.4	213.4	212.7	212.3	212.1	212.5	133.2	124.3	119.9	119.3	122.7	123.3	120.9
20,0°	214.1	213.6	213.2	213.0	213.1	213.3	137.1	127.4	123.4	126.6	126.9	123.9	116.6
22,5°	214.3	214.4	214.7	215.0	215.1	215.5	141.6	131.5	130.1	133.5	129.8	121.1	112.4
25,0°	216.2	216.9	218.0	218.7	219.0	219.2	144.8	135.6	139.1	137.9	129.9	118.0	107.7
27,5°	221.4	221.4	222.7	224.2	224.9	225.3	148.8	141.1	148.2	141.8	128.2	114.5	99.6
30,0°	231.3	233.0	236.6	240.1	242.2	243.1	154.8	149.7	156.9	144.7	125.6	108.0	89.9
32,5°	254.6	257.7	262.7	267.4	270.4	271.7	164.4	162.0	166.2	147.7	123.8	99.9	84.5
35,0°	289.2	292.3	297.4	302.4	305.8	307.3	176.3	176.8	173.6	149.1	120.8	94.1	82.0
37,5°	329.5	331.1	334.3	338.5	341.3	342.6	189.7	187.5	178.7	151.6	120.7	94.9	82.2
40,0°	373.3	373.3	375.2	378.3	380.7	381.9	201.5	195.6	181.9	155.8	121.6	97.2	83.0
42,5°	427.9	427.5	429.7	432.8	434.9	435.9	213.0	203.0	186.2	161.1	124.4	97.5	82.2
45,0°	515.9	516.7	519.4	522.7	524.5	524.6	228.5	211.1	186.6	157.6	119.9	91.7	77.6
47,5°	647.7	657.3	664.1	666.6	667.1	667.1	241.9	213.6	182.8	144.4	107.2	82.1	71.3
50,0°	823.6	831.4	827.5	818.7	812.9	811.2	237.2	198.9	160.0	117.9	86.6	70.6	65.1
52,5°	954.4	935.7	917.1	905.4	900.0	892.7	208.7	158.6	123.3	89.3	68.1	60.6	60.6
55,0°	976.9	931.1	893.0	853.5	815.6	802.4	171.6	131.0	95.0	68.3	55.6	52.4	57.3
57,5°	866.1	761.2	674.8	597.6	539.1	514.3	155.1	115.7	79.1	56.8	48.7	47.5	53.9
60,0°	657.6	553.5	435.7	331.3	258.5	238.3	137.5	95.3	65.7	50.4	43.4	44.7	50.5
62,5°	454.3	354.9	248.8	185.2	174.2	172.9	91.7	61.1	55.6	46.0	39.3	39.9	45.7
65,0°	283.3	224.2	165.4	154.7	151.8	150.6	55.4	44.9	47.1	42.1	36.8	36.0	39.7
67,5°	203.8	163.6	142.4	137.1	134.0	131.8	39.2	38.4	38.9	37.8	35.3	33.6	35.9
70,0°	154.3	127.7	119.4	113.4	105.6	101.9	29.8	33.0	35.2	34.9	32.9	30.9	33.4
72,5°	107.0	89.2	82.5	76.1	68.1	64.5	24.7	26.7	29.6	29.3	27.7	26.7	28.3
75,0°	73.6	60.1	54.2	53.5	49.0	46.2	21.4	23.0	23.8	23.4	22.6	21.8	21.8
77,5°	43.5	36.8	35.5	41.0	40.5	37.4	15.8	17.8	17.7	16.9	17.1	16.0	15.3
80,0°	22.6	21.6	21.1	23.7	20.1	17.7	10.0	11.6	11.6	11.4	11.2	10.3	9.6
82,5°	9.7	9.3	9.3	9.6	7.9	7.0	5.9	6.6	7.0	7.0	6.5	5.9	5.5
85,0°	2.9	2.8	2.5	2.4	2.3	2.3	2.8	3.2	3.6	3.2	3.0	2.9	2.6
87,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	0.2	0.2
2,5°	110.8	110.2	109.6	109.2	108.8	108.5	108.3	108.2	108.1	107.7	107.7	1.5	1.6
5,0°	107.8	107.2	106.7	106.4	106.0	105.7	105.5	105.4	105.2	105.0	104.9	3.2	4.8
7,5°	107.8	107.1	106.8	106.9	107.4	107.9	108.5	109.0	109.3	109.4	109.3	5.4	10.2
10,0°	110.4	111.9	113.3	113.9	114.3	114.1	113.5	112.9	112.3	111.8	111.4	7.6	17.8
12,5°	117.2	117.6	116.5	114.2	111.2	108.5	106.4	104.7	103.5	102.6	102.2	9.6	27.4
15,0°	119.4	115.6	111.1	107.2	103.5	100.3	97.6	95.5	93.8	92.6	92.0	11.4	38.8
17,5°	115.0	109.5	104.3	99.2	93.8	88.0	82.5	78.0	75.0	73.3	72.6	13.1	51.9
20,0°	109.9	103.3	95.5	86.2	78.0	72.9	70.2	68.6	67.6	67.0	66.7	14.9	66.8
22,5°	104.0	93.0	81.4	74.7	71.6	69.7	68.3	67.3	66.5	66.0	65.8	16.7	83.5
25,0°	94.5	81.7	75.5	72.3	70.4	69.0	68.0	67.2	66.6	66.1	65.9	18.7	102.3
27,5°	85.0	77.8	73.8	71.4	70.0	69.2	68.6	67.9	67.4	67.0	66.8	20.9	123.1
30,0°	80.9	76.0	72.9	71.0	70.0	69.5	69.1	68.5	68.0	67.6	67.6	23.4	146.5
32,5°	78.2	74.6	72.3	71.0	70.5	70.3	69.7	68.9	68.2	67.7	67.5	26.6	173.1
35,0°	76.1	73.5	72.5	72.4	72.0	71.2	70.0	68.6	67.5	66.7	66.3	30.5	203.6
37,5°	75.6	73.3	73.4	73.8	73.0	71.1	69.0	67.1	65.5	64.6	64.3	35.1	238.7
40,0°	76.1	74.0	73.9	74.0	72.1	69.3	66.7	64.3	62.8	62.1	61.7	40.2	279.0
42,5°	76.9	74.8	73.9	72.8	70.4	67.2	64.6	62.9	61.7	61.1	60.9	46.2	325.2
45,0°	75.7	74.6	73.0	72.0	69.6	66.4	63.8	62.4	61.3	60.7	60.5	53.7	378.9
47,5°	72.1	72.9	72.8	72.1	69.5	66.2	63.7	62.7	62.6	62.2	61.9	63.4	442.3
50,0°	67.2	71.2	72.5	71.6	69.5	66.6	65.2	63.1	60.8	59.8	59.6	73.9	516.3
52,5°	64.4	69.3	71.6	70.8	69.2	68.2	63.9	60.6	58.3	57.8	57.1	81.7	597.9
55,0°	64.2	68.0	70.0	68.7	69.4	67.3	62.5	57.6	54.9	55.0	53.8	83.2	681.1
57,5°	62.3	67.1	67.2	66.0	66.6	65.8	60.2	55.2	52.9	52.6	51.1	76.1	757.2
60,0°	57.3	64.1	64.3	62.2	63.1	63.2	58.7	54.8	53.1	55.2	56.2	65.5	822.7
62,5°	51.2	57.8	61.2	58.7	58.9	59.2	57.8	56.8	62.8	70.0	69.3	53.9	876.6
65,0°	46.0	50.6	55.4	54.9	54.3	55.7	57.4	66.3	66.7	59.9	56.9	40.4	917.0
67,5°	39.9	43.1	46.6	48.3	49.4	51.9	60.8	65.3	58.0	53.0	50.7	28.1	945.1
70,0°	33.8	34.3	37.9	40.4	42.2	47.5	59.1	60.1	51.6	47.0	45.7	19.5	964.6
72,5°	26.5	26.0	26.8	30.1	34.3	41.5	47.9	49.8	43.4	38.3	37.0	12.6	977.3
75,0°	20.0	17.9	19.3	21.6	25.3	33.0	36.3	36.9	34.0	30.0	28.4	9.1	986.4
77,5°	13.7	12.6	13.0	14.9	17.2	22.7	24.4	24.6	24.0	21.6	19.8	6.5	992.8
80,0°	8.4	8.1	8.4	9.3	10.4	12.2	13.9	14.2	14.0	13.2	12.2	3.9	996.8
82,5°	4.9	4.6	4.7	5.2	5.6	6.0	6.8	6.8	6.5	6.2	5.7	2.1	998.9
85,0°	2.4	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	0.8	999.7
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
----------------------------------	--	-----------------------------

sITeco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	219062	1527.5
95	238	252	209413	1440.4
90	223	249	198666	1348.1
85	208	247	187696	1256.4
80	193	244	176250	1164.9
75	179	241	165662	1079.7
70	165	238	154399	995.4
65	151	235	142855	911.1
60	138	232	131919	833.2
55	125	228	120805	755.7
50	113	224	110184	684.0
45	101	220	99405	613.2
40	89	216	88390	542.5
35	77	210	77136	472.2
30	66	205	66421	407.7
25	54	197	54888	337.2
20	43	189	44076	274.4
15	32	178	33266	213.5
10	21	163	21873	145.7
5	10	136	10729	76.6
1	3	91	3061	32.4

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
97	244	253	208138	1467.4
95	237	252	203503	1424.3
90	221	249	192597	1326.4
85	206	246	182082	1234.9
80	191	244	171038	1144.2
75	177	241	160870	1059.5
70	163	238	149899	975.6
65	149	235	138823	891.8
60	136	231	128170	814.6
55	123	228	117277	737.8
50	111	224	106916	666.6
45	99	220	96390	596.1
40	87	215	85537	525.9
35	75	209	74572	456.2
30	64	204	64013	392.7
25	53	197	53501	328.5
20	42	188	42870	266.3
15	31	177	32106	206.1
10	21	163	21785	144.2
5	10	136	10701	75.8
1	3	92	3056	32.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127V01AA EAN: 4058352927168	LP number 59472_2
----------------------------------	--	-----------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	220410.0	1540.1
25.0	207030.0	1456.4