



## Photometric test report

<b>Family</b> <b>Licross® 11 Protected</b>	<b>Order number: 51TD1BMN49XG</b> <b>EAN: 4058352928981</b>	<b>LP number</b> <b>58522_254</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Protected	<b>Order number: 51TD1BMN49XG</b> <b>EAN: 4058352928981</b>	<b>LP number</b> 58522_254
--	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.0	22.6	21.3	22.9	23.2	22.8	24.5	23.2	24.8	25.1
	3H	22.1	23.6	22.5	23.9	24.3	23.9	25.3	24.2	25.7	26.0
	4H	22.8	24.2	23.2	24.6	24.9	24.2	25.6	24.6	25.9	26.3
	6H	23.6	24.9	24.0	25.2	25.6	24.5	25.7	24.9	26.1	26.5
	8H	24.0	25.2	24.4	25.6	26.0	24.6	25.8	25.0	26.1	26.5
	12H	24.4	25.5	24.8	25.9	26.3	24.6	25.7	25.0	26.1	26.5
4H	2H	21.8	23.2	22.2	23.5	23.9	23.3	24.7	23.7	25.0	25.4
	3H	23.2	24.3	23.6	24.7	25.1	24.6	25.7	25.0	26.1	26.5
	4H	24.0	25.0	24.4	25.4	25.9	25.1	26.1	25.5	26.5	27.0
	6H	24.9	25.8	25.3	26.2	26.7	25.4	26.3	25.9	26.8	27.2
	8H	25.3	26.2	25.8	26.6	27.1	25.5	26.4	26.0	26.8	27.3
	12H	25.8	26.6	26.3	27.0	27.5	25.6	26.4	26.1	26.9	27.3
8H	4H	24.4	25.2	24.8	25.7	26.1	25.3	26.2	25.8	26.6	27.1
	6H	25.5	26.2	25.9	26.6	27.1	25.9	26.6	26.3	27.0	27.5
	8H	26.1	26.7	26.5	27.2	27.7	26.1	26.7	26.6	27.2	27.7
	12H	26.7	27.2	27.2	27.7	28.3	26.2	26.8	26.7	27.3	27.8
12H	4H	24.5	25.2	24.9	25.7	26.2	25.4	26.2	25.9	26.6	27.1
	6H	25.6	26.2	26.1	26.7	27.2	26.0	26.6	26.5	27.1	27.6
	8H	26.2	26.8	26.8	27.3	27.8	26.2	26.8	26.8	27.3	27.8

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 13</b>	<b>H(C180) = 13</b>
			<b>B = 78</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		17180.2	18082.5	20710.4	24728.9	27480.9	26520.3	25778.3	
50°		14650.8	15371.3	17487.2	20939.9	24073.7	24682.7	24617.4	
55°		12691.7	13344.6	15345.4	18283.4	20907.8	21940.8	22791.1	
60°		11275.8	11780.4	13511.7	16364.9	18307.2	18944.2	20206.1	
65°		10604.8	10944.0	12149.4	14694.3	16270.8	16212.5	17325.2	
70°		10586.0	10764.8	11337.5	13218.7	14581.4	13855.2	14704.3	
75°		11000.9	11046.6	11073.2	12086.2	12983.9	11767.9	12371.4	
80°		11651.2	11590.7	11337.1	11415.9	11597.8	10113.0	10263.0	
85°		12578.0	12509.8	12168.7	11720.7	10982.3	8994.7	8531.5	


# Photometric test report

<b>Family</b> <b>Licross® 11 Protected</b>	<b>Order number: 51TD1BMN49XG</b> <b>EAN: 4058352928981</b>	<b>LP number</b> <b>58522_254</b>
---	--	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°    
   $\gamma$  70°    
   $\gamma$  75°    
   $\gamma$  80°    
   $\gamma$  85°

**siteco**

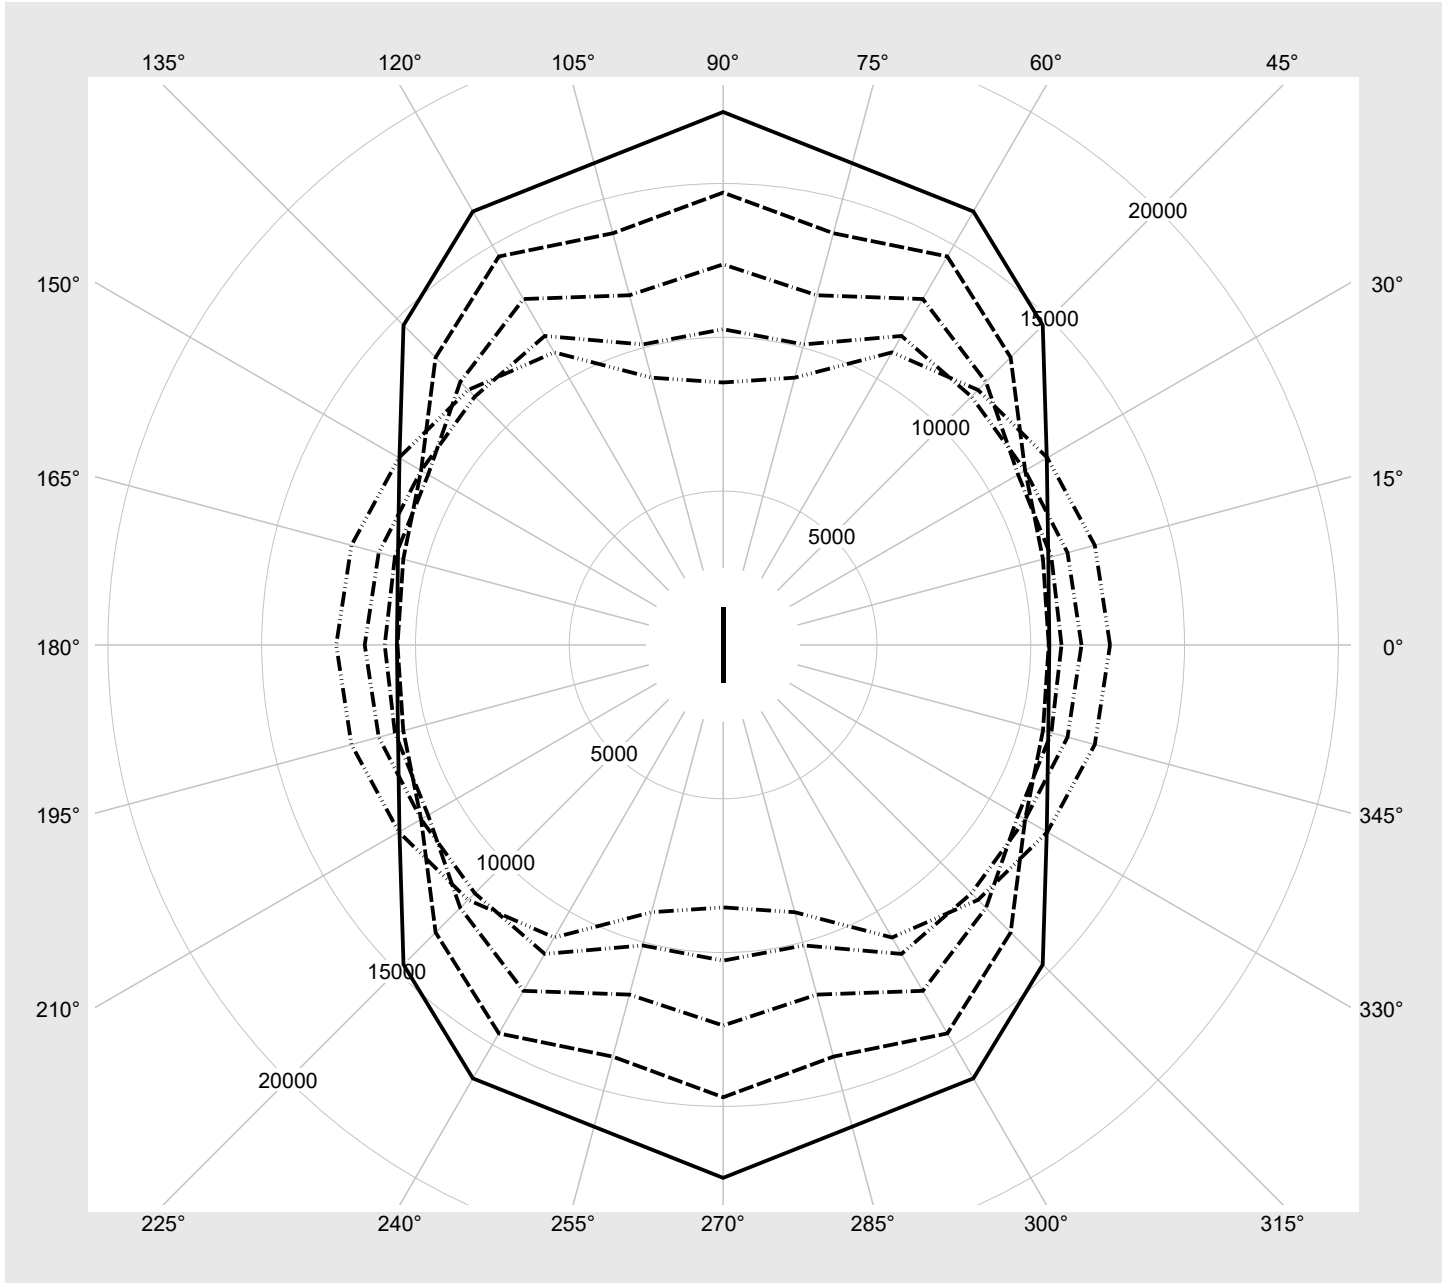

## Photometric test report

Family <b>Licross® 11 Protected</b>	Order number: <b>51TD1BMN49XG</b> EAN: <b>4058352928981</b>	LP number <b>58522_254</b>
--	--	-------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	9410	55.3
2	A	C	F	8931	52.1
3	A	D	E	8516	49.4
4	A	D	F	8026	46.3
5	B	C	E	7526	43.1
6	B	C	F	7111	40.5
7	B	D	E	6600	37.4
8	B	D	F	6163	34.7