

## Photometric test report

Family  
DL® 20 LED

Order number: 5XA512836R008P  
EAN: 4069025024732

LP number  
59488\_31



**Version** post-top mounting  
**Optic** asymmetric, extremely wide distribution (P1.0a)  
**Cover** toughened safety glass  
**Lamps** LED 2700 K | CRI ≥ 70  
**Controlgear** ECG Plus  
**Rated values** Net luminous flux = 4220 lm  
Power consumption = 40.6 W  
Luminous efficacy = 103.9 lm/W

serial  
documentation  
07.12.2023

siteco

Luminous intensity in cd/klm


**C180-0**

**C190-10**

**C195-15**

**C270-90**

**Imax: 427 cd/klm**

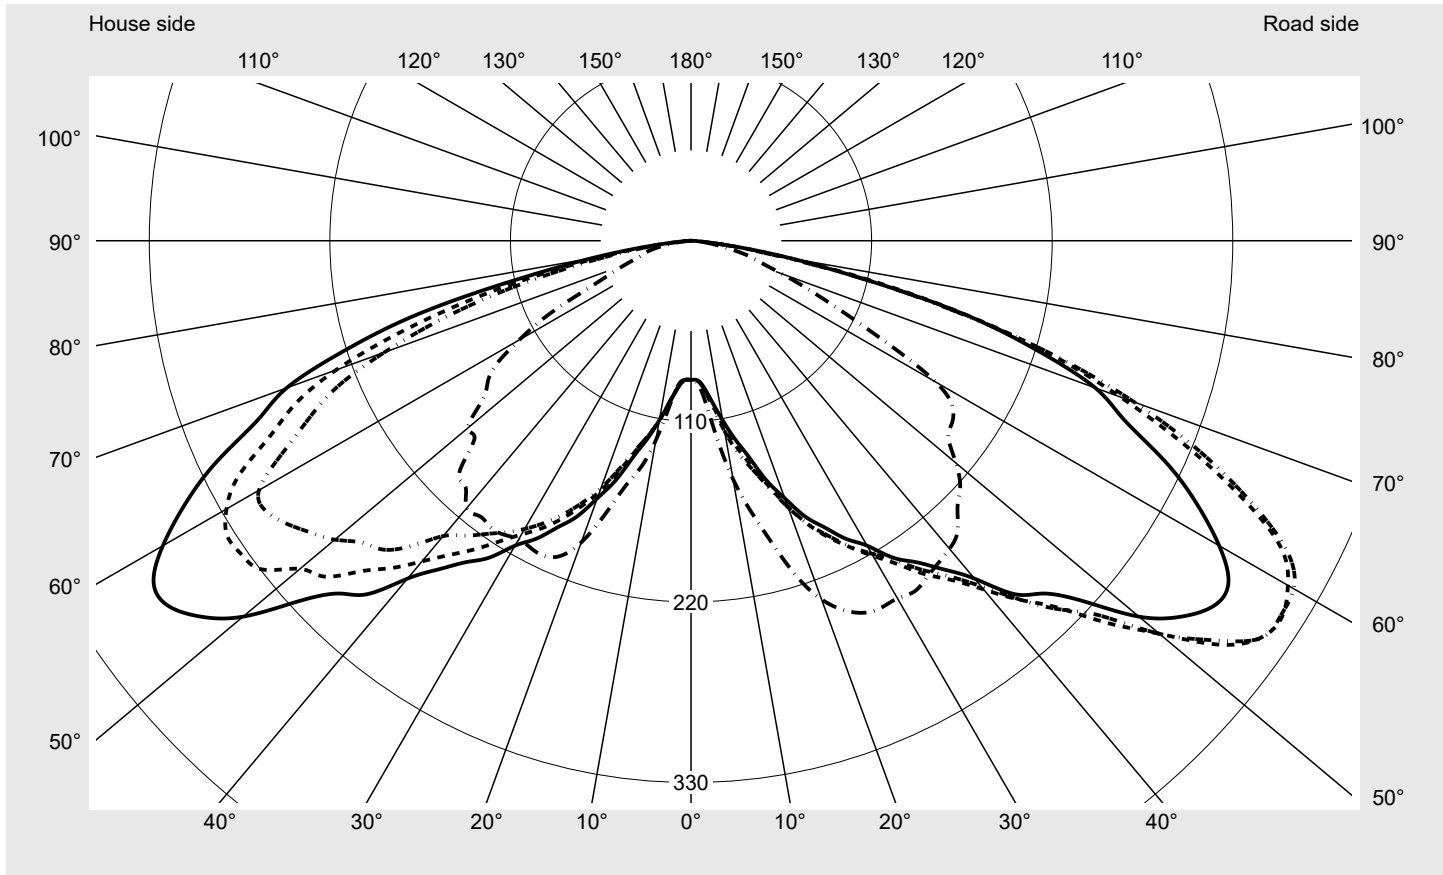

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G6
Imax 70°	291.0
Imax 80°	62.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512836R008P</b> <b>EAN: 4069025024732</b>	<b>LP number</b> <b>59488_31</b>
------------------------------------	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**    **KMK 50°**      **siteco**

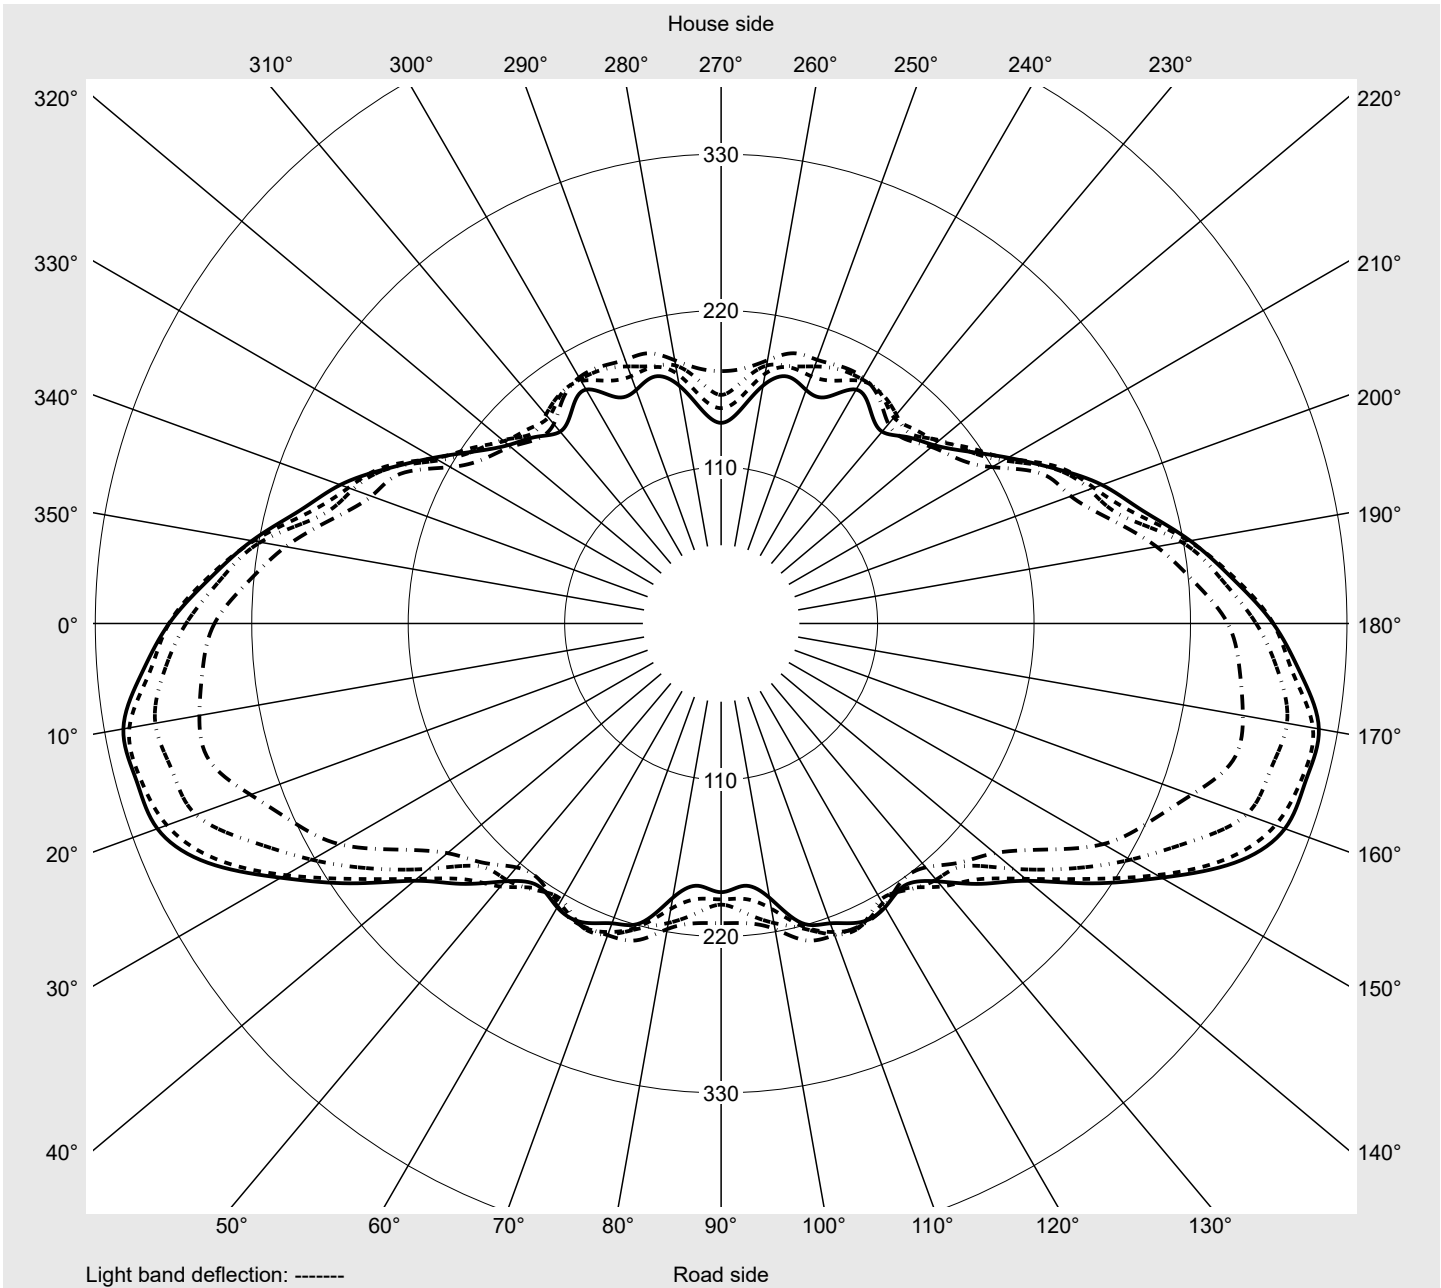

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512836R008P</b> <b>EAN: 4069025024732</b>	<b>LP number</b> <b>59488_31</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	85.0	85.0	85.0	85.2	85.3	85.2	85.4	85.5	85.6	85.8	85.9	85.9	86.3
5,0°	89.6	90.0	90.3	90.7	91.2	91.5	92.1	92.8	93.3	94.0	94.6	95.0	95.9
7,5°	99.2	100.0	100.9	102.4	103.9	105.3	107.1	108.9	110.4	112.3	113.5	114.8	116.5
10,0°	111.0	113.0	115.1	117.8	120.6	123.2	126.3	128.3	130.1	132.8	133.7	135.2	138.1
12,5°	123.8	126.0	128.8	132.2	135.0	137.9	141.4	142.9	144.3	146.7	147.1	148.7	152.2
15,0°	136.5	139.0	141.6	144.0	145.8	149.2	153.2	155.7	158.6	162.2	163.6	166.4	170.9
17,5°	153.2	154.7	156.3	157.7	160.1	164.8	170.0	174.1	178.6	183.3	186.6	191.1	196.4
20,0°	166.9	170.5	172.1	172.8	175.4	180.4	185.2	188.7	191.6	194.3	199.1	205.0	210.5
22,5°	181.9	185.6	187.3	187.0	189.0	192.2	195.0	197.4	198.3	199.7	205.0	211.5	217.2
25,0°	192.7	198.4	199.6	198.4	199.5	200.0	201.1	203.7	203.4	203.7	209.1	215.5	221.9
27,5°	204.8	209.3	210.6	209.9	209.4	206.7	206.3	208.8	209.1	208.8	212.2	219.0	227.0
30,0°	214.5	219.4	221.7	220.0	216.5	213.4	211.2	212.8	215.2	212.8	216.1	223.7	231.4
32,5°	228.9	232.4	233.4	230.7	227.6	223.1	216.4	218.2	222.3	218.5	219.7	227.9	235.4
35,0°	239.0	245.8	247.9	244.5	242.1	232.3	225.2	226.8	229.3	223.7	222.1	228.7	235.2
37,5°	252.2	260.1	260.4	257.5	258.2	248.8	237.4	237.1	234.5	227.7	226.7	231.0	235.0
40,0°	268.7	277.0	277.2	274.7	277.0	262.4	250.3	247.3	240.1	233.8	232.7	234.4	239.7
42,5°	292.0	292.6	296.7	296.4	294.2	278.8	260.6	251.5	243.8	233.0	234.0	234.8	237.4
45,0°	303.9	311.1	316.0	317.5	313.1	292.9	276.4	260.2	246.0	232.1	231.5	233.3	235.5
47,5°	325.4	337.3	344.8	337.9	328.1	311.5	289.8	267.6	245.4	230.2	228.4	226.4	229.5
50,0°	356.2	365.9	372.5	372.5	352.0	331.3	310.2	277.1	251.2	237.6	223.8	221.2	229.8
52,5°	376.2	393.3	404.0	399.6	393.0	363.4	332.2	300.3	268.3	241.3	235.1	228.6	224.3
55,0°	388.2	403.7	422.5	422.6	414.7	391.8	353.8	313.1	279.3	254.5	241.3	227.2	227.0
57,5°	388.1	409.2	426.7	425.7	421.8	398.1	357.5	318.5	281.4	258.8	236.7	224.9	230.4
60,0°	371.5	398.9	419.8	423.9	418.9	391.5	349.4	304.2	268.0	244.3	218.8	215.6	225.7
62,5°	347.5	376.5	405.2	409.3	399.8	375.5	330.2	279.9	244.1	213.1	188.6	193.0	198.9
65,0°	319.1	340.2	370.3	376.1	367.6	347.2	308.8	252.6	215.5	183.9	160.5	170.1	162.8
67,5°	285.9	303.0	326.3	335.6	331.5	310.6	275.2	221.8	195.7	160.5	130.9	142.4	125.7
70,0°	262.1	266.9	278.4	287.3	291.0	272.8	233.9	190.1	169.6	132.3	99.9	110.8	95.1
72,5°	219.8	223.5	229.2	231.6	238.8	229.8	187.3	155.5	138.1	105.1	82.1	80.2	68.6
75,0°	171.0	169.4	171.8	167.8	172.9	173.4	139.2	116.0	108.9	84.3	63.9	56.5	52.5
77,5°	107.7	114.4	112.8	108.2	107.3	109.5	86.8	71.4	76.7	57.3	44.4	39.5	37.5
80,0°	61.9	62.7	61.1	54.6	54.0	59.6	39.6	34.0	43.6	27.7	22.9	22.2	22.8
82,5°	27.6	27.0	26.5	24.1	22.0	27.1	15.6	14.5	22.1	10.9	10.3	11.0	12.2
85,0°	8.1	7.4	6.9	6.6	6.3	9.8	6.0	5.4	9.0	4.8	4.5	4.6	4.9
87,5°	2.2	2.1	2.1	2.0	2.0	2.2	1.8	1.8	2.0	1.6	1.6	1.6	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA512836R008P</b> <b>EAN: 4069025024732</b>	<b>LP number</b> <b>59488_31</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	86.4	86.4	86.7	86.7	86.7	86.8	84.8	84.8	84.9	84.8	84.7	84.8	84.6
5,0°	96.3	96.6	97.3	97.2	97.5	97.9	89.6	89.5	89.4	89.1	89.1	89.1	88.9
7,5°	117.4	118.4	119.8	119.9	120.4	121.4	98.8	98.7	98.8	99.0	99.4	99.7	100.2
10,0°	139.0	140.9	143.9	144.6	146.0	147.5	110.7	110.8	111.1	111.6	112.6	114.0	115.4
12,5°	153.7	156.9	162.1	164.1	166.6	169.1	122.7	122.2	122.2	122.4	123.3	125.1	126.6
15,0°	173.0	177.0	182.5	184.8	187.8	190.7	135.3	133.6	132.5	131.8	132.5	134.7	136.5
17,5°	199.9	204.5	209.3	211.2	213.0	214.6	150.5	148.1	146.0	145.5	147.5	150.7	152.8
20,0°	216.7	222.7	227.0	230.6	232.2	232.5	165.4	162.4	160.3	160.5	162.6	165.8	167.2
22,5°	225.4	232.4	237.2	242.2	244.1	243.6	178.4	175.3	172.6	172.5	173.0	173.6	174.6
25,0°	231.4	237.6	241.5	247.2	250.0	250.0	190.2	187.1	183.8	182.3	179.6	178.8	180.8
27,5°	236.4	240.6	243.5	250.0	253.2	251.7	200.9	197.6	193.9	190.7	185.4	183.9	184.8
30,0°	239.3	241.7	244.2	250.1	252.8	251.6	211.6	206.6	202.7	197.8	193.1	189.9	188.4
32,5°	240.5	244.3	245.8	248.2	252.1	253.3	223.2	217.1	210.6	205.6	199.9	194.5	189.5
35,0°	242.0	245.8	245.8	245.5	248.1	250.4	236.4	229.4	218.1	212.5	205.7	196.8	191.8
37,5°	240.8	243.3	242.8	243.9	245.7	247.5	247.4	241.1	226.4	218.5	214.8	203.6	197.9
40,0°	243.0	242.9	241.3	243.1	244.3	244.9	261.9	255.0	234.8	228.5	223.3	210.2	207.7
42,5°	242.3	243.5	242.7	241.5	242.8	240.3	281.1	270.4	252.1	239.3	232.4	212.9	206.9
45,0°	241.1	241.5	237.4	239.2	235.1	229.6	294.1	284.8	265.9	246.2	233.5	216.3	200.5
47,5°	243.2	235.3	231.2	233.6	225.9	222.4	314.7	302.8	272.1	255.9	241.4	216.3	199.9
50,0°	233.9	233.2	230.6	218.2	211.6	210.7	334.0	310.9	283.3	261.7	248.9	219.8	202.4
52,5°	234.1	232.7	222.0	213.8	204.7	197.7	353.3	329.0	292.0	275.6	257.8	229.3	211.7
55,0°	234.0	230.8	220.2	203.7	194.5	194.0	362.8	333.8	300.6	278.9	260.8	232.3	214.8
57,5°	231.7	224.3	217.9	195.8	185.1	188.9	361.1	334.9	306.7	284.9	258.2	233.1	211.0
60,0°	217.5	209.8	211.0	180.9	164.1	172.2	349.9	326.7	303.9	279.1	249.8	222.2	196.9
62,5°	193.3	185.0	177.2	155.6	136.2	133.9	331.1	310.9	280.8	253.3	227.8	197.5	169.3
65,0°	160.7	156.3	135.0	118.7	107.7	101.0	305.6	283.8	257.2	230.6	203.7	173.9	146.0
67,5°	124.5	131.5	97.5	88.5	87.9	77.4	277.9	261.6	233.8	209.2	186.1	154.9	127.6
70,0°	87.1	97.6	70.5	67.2	69.1	58.9	247.4	230.1	198.8	177.6	161.3	133.7	108.4
72,5°	60.3	63.7	51.4	50.1	50.1	45.1	206.9	186.0	159.9	143.6	134.8	108.6	85.2
75,0°	46.9	44.6	41.7	40.4	36.9	37.2	154.2	138.8	118.3	105.8	102.4	79.7	60.4
77,5°	34.8	31.9	32.1	30.5	28.3	26.8	102.4	91.8	76.9	70.0	71.0	51.1	38.7
80,0°	22.4	21.2	21.6	21.1	19.0	17.3	56.8	52.6	44.7	39.6	42.9	23.7	20.2
82,5°	12.3	11.6	12.2	11.8	10.7	10.3	25.8	24.7	21.0	18.6	22.1	11.7	9.3
85,0°	5.1	5.0	5.0	5.0	4.7	4.7	7.4	7.3	6.5	6.3	8.4	5.0	4.0
87,5°	1.6	1.5	1.6	1.5	1.4	1.4	2.2	2.2	2.1	2.0	2.1	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL® 20 LED</b>	Order number: <b>5XA512836R008P</b> EAN: <b>4069025024732</b>	LP number <b>59488_31</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	0.1	0.1
2,5°	84.6	84.6	84.6	84.5	84.6	84.6	84.5	84.7	84.6	84.5	84.8	1.0	1.1
5,0°	89.0	88.8	88.7	88.5	88.4	88.2	88.0	88.0	87.8	87.8	88.1	2.2	3.3
7,5°	100.8	101.2	101.5	101.8	102.1	102.0	102.0	102.1	101.8	101.8	102.1	3.8	7.1
10,0°	116.9	118.3	119.2	120.2	121.8	122.0	122.2	123.0	122.4	122.4	123.3	5.9	13.0
12,5°	128.2	130.5	131.7	133.5	136.3	136.6	137.5	140.0	139.9	140.4	141.4	8.2	21.2
15,0°	137.6	140.2	141.8	143.8	147.4	148.5	150.0	152.9	153.0	153.6	154.9	10.8	32.0
17,5°	153.6	155.4	157.5	160.0	164.8	167.2	169.4	172.7	173.5	174.0	175.1	14.1	46.1
20,0°	167.3	167.9	170.0	173.7	179.3	183.5	186.8	190.7	193.5	195.0	195.5	17.5	63.6
22,5°	174.8	174.7	177.2	182.0	186.7	192.1	197.8	201.7	206.1	207.7	207.8	20.6	84.2
25,0°	179.9	178.4	182.3	187.5	191.3	197.2	203.4	207.7	211.9	212.9	211.9	23.6	107.8
27,5°	182.1	181.5	187.1	192.0	193.6	200.1	208.0	212.2	217.6	216.3	211.1	26.5	134.2
30,0°	184.4	184.0	190.7	193.8	194.9	201.6	209.0	216.0	221.5	216.5	209.9	29.3	163.5
32,5°	185.6	187.1	193.6	195.0	197.3	202.3	210.2	217.7	221.3	217.0	212.3	32.2	195.7
35,0°	189.4	191.3	197.1	196.9	200.2	202.8	210.3	217.0	219.5	215.4	213.0	35.1	230.8
37,5°	195.1	196.5	197.6	198.7	202.4	205.4	210.6	217.3	217.0	213.1	211.5	38.1	268.8
40,0°	201.9	193.2	195.9	198.5	203.8	207.5	213.6	219.6	218.8	214.9	212.8	41.4	310.2
42,5°	196.5	191.5	193.9	196.4	203.0	208.2	210.4	217.9	212.7	208.0	203.3	44.3	354.5
45,0°	189.1	187.4	186.8	190.8	200.7	204.8	203.1	209.4	205.5	200.9	199.6	46.8	401.3
47,5°	190.3	182.9	185.2	190.8	196.7	200.7	200.7	198.1	201.3	190.2	179.0	49.5	450.8
50,0°	193.1	183.3	183.1	193.5	199.7	199.4	197.3	196.7	187.9	180.0	177.4	52.5	503.3
52,5°	200.5	188.5	191.6	197.2	198.2	197.0	192.3	187.4	184.1	170.9	160.7	56.2	559.5
55,0°	199.4	192.8	189.0	196.5	196.9	188.3	185.0	186.4	178.3	159.7	151.4	59.0	618.5
57,5°	195.1	185.3	176.1	183.0	189.9	175.7	174.7	179.8	169.8	150.2	141.0	60.2	678.6
60,0°	180.8	174.5	161.1	169.4	176.8	161.4	161.1	163.6	151.7	128.5	120.8	58.9	737.6
62,5°	155.4	148.2	135.0	146.4	149.8	136.7	145.6	139.5	120.9	102.7	98.8	54.5	792.1
65,0°	137.5	125.2	108.7	112.1	107.6	103.9	116.2	104.2	87.5	76.1	70.6	48.4	840.5
67,5°	124.8	105.1	87.0	87.7	79.7	79.3	91.9	76.6	57.6	55.2	53.7	42.5	883.0
70,0°	105.0	84.0	64.3	68.2	53.1	55.2	67.3	55.8	44.5	42.9	42.8	36.0	919.0
72,5°	81.5	66.9	46.6	44.5	37.3	37.1	46.8	40.8	37.2	35.0	33.9	29.1	948.1
75,0°	62.9	52.4	34.8	29.8	29.2	29.8	31.9	32.3	32.5	29.9	29.4	22.2	970.3
77,5°	45.9	34.6	22.1	21.7	21.9	22.9	23.3	25.7	26.7	24.3	23.7	15.1	985.3
80,0°	26.9	17.1	13.5	14.1	15.2	16.0	16.1	17.6	18.4	16.9	16.1	8.6	993.9
82,5°	13.3	7.7	7.0	7.7	9.1	9.2	9.2	9.9	10.4	9.6	9.3	4.1	998.0
85,0°	6.4	3.7	3.5	3.7	4.0	4.1	4.0	4.1	4.2	4.0	3.9	1.5	999.5
87,5°	2.0	1.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA512836R008P</b> <b>EAN: 4069025024732</b>	<b>LP number</b> 59488_31
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4220	40.6	41.8	41.2
95	240	4004	38.4	39.4	38.9
90	227	3801	36.2	37.2	36.7
85	213	3580	34.0	34.9	34.4
80	200	3374	32.0	32.8	32.4
75	187	3167	29.9	30.7	30.3
70	174	2958	27.9	28.6	28.2
65	161	2746	25.8	26.5	26.2
60	148	2534	23.8	24.5	24.2
55	135	2319	21.8	22.4	22.1
50	122	2103	19.9	20.4	20.2
45	110	1902	18.1	18.6	18.4
40	97	1682	16.1	16.5	16.3
35	85	1478	14.4	14.8	14.6
30	73	1272	12.7	13.0	12.8
25	60	1048	10.9	11.1	11.0
20	48	839	9.2	9.4	9.3
15	36	629	7.5	7.6	7.6
12	29	504	6.5	6.6	6.6