

Photometric test report

Family
DL® 20 LED

Order number: 5XA512836S008
EAN: 4069025024756

LP number
59489_22



Version post-top mounting
Optic symmetric, wide distribution (PL1.2s)
Cover toughened safety glass
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG Plus
Rated values Net luminous flux = 3050 lm
Power consumption = 28.6 W
Luminous efficacy = 106.6 lm/W

serial
documentation
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 324 cd/klm

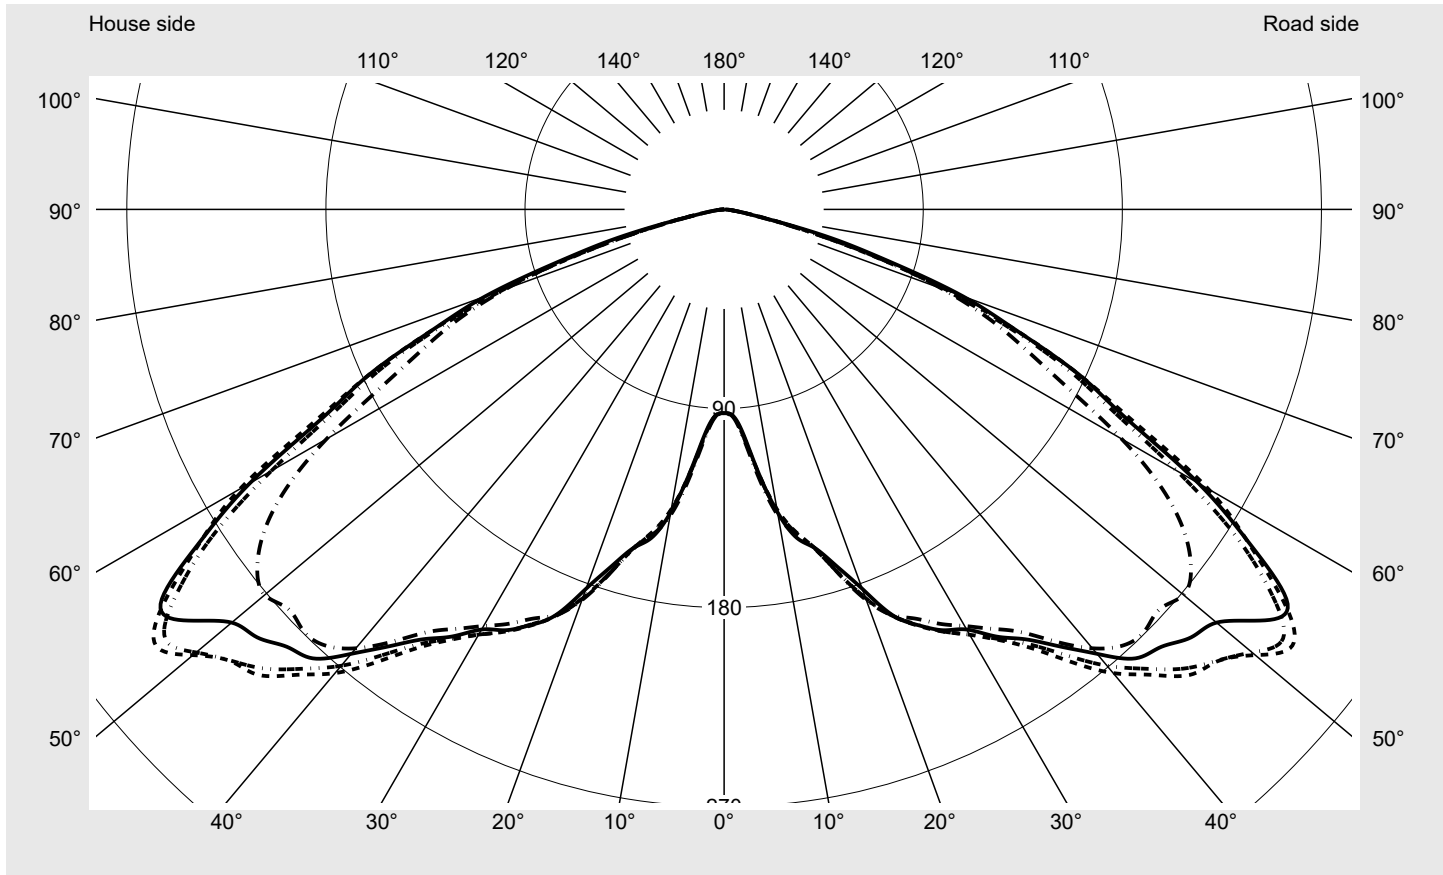

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	119.6
Imax 80°	10.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA512836S008 EAN: 4069025024756	LP number 59489_22
------------------------------------	---	-------------------------------------

Envelope curve in cd/klm **KMK 52.5°** **KMK 50°** **KMK 47.5°** **KMK 45°** **siteco**

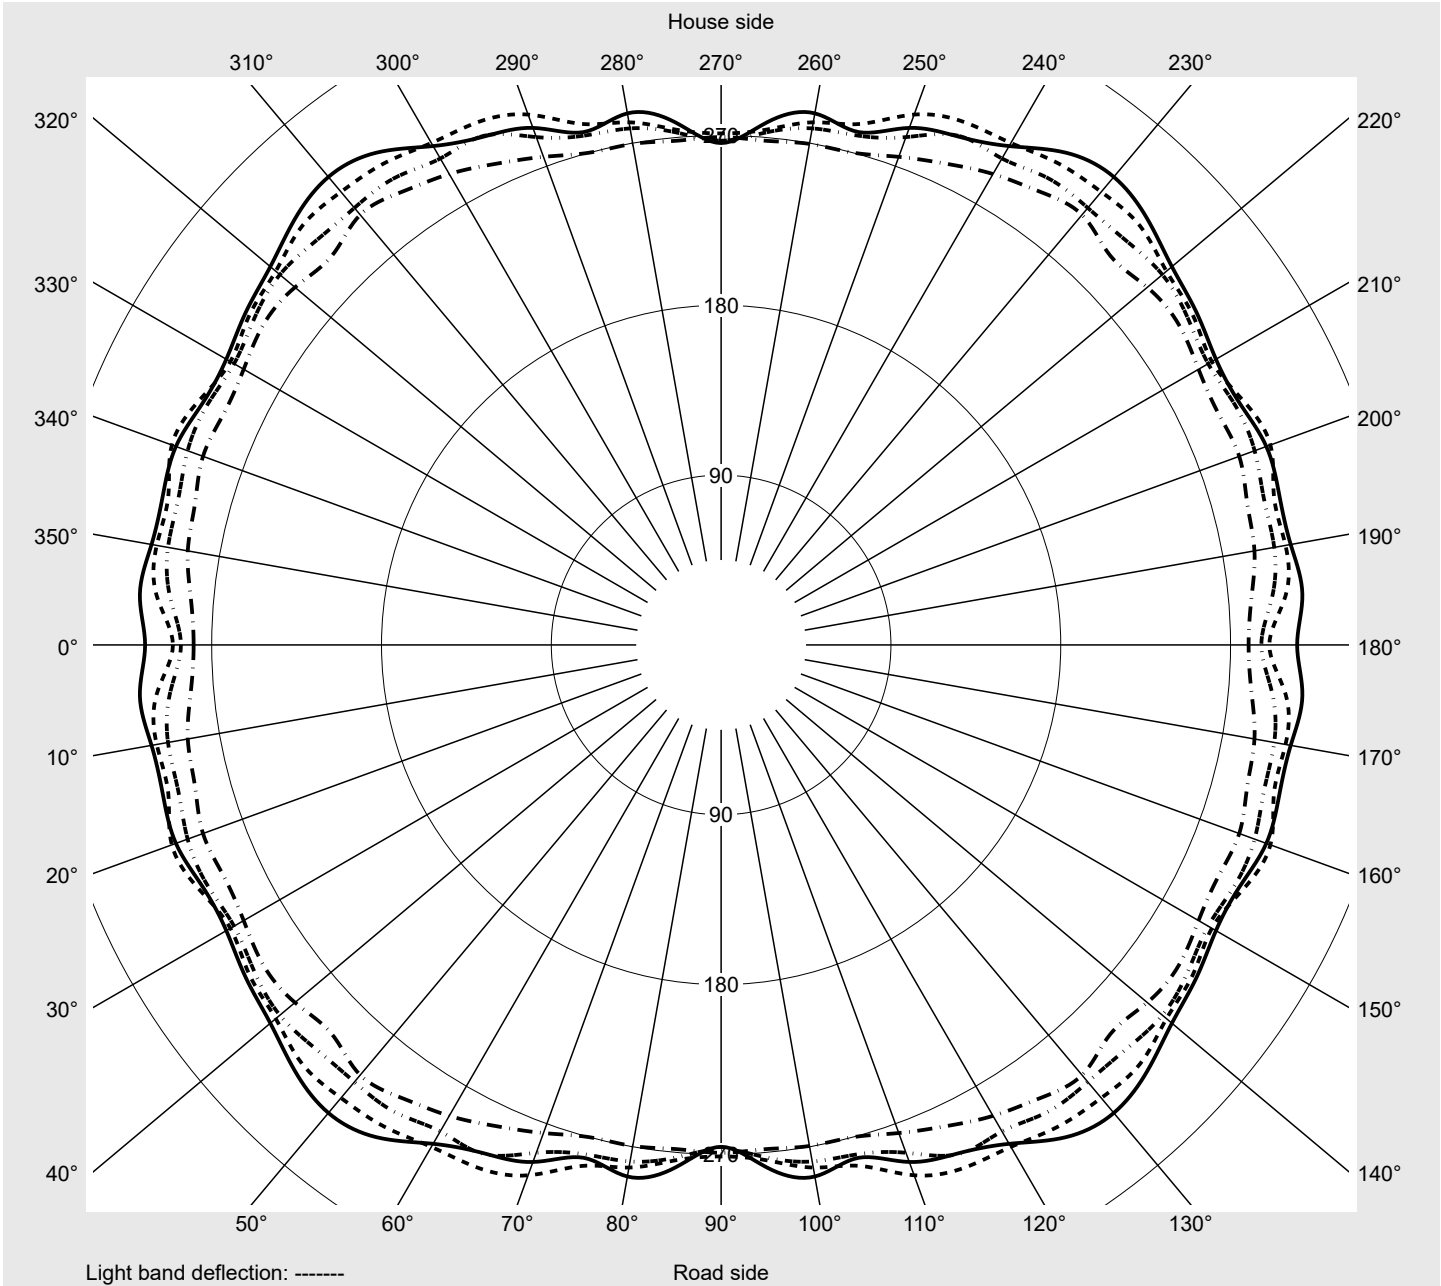

Photometric test report

Family DL® 20 LED	Order number: 5XA512836S008 EAN: 4069025024756	LP number 59489_22
------------------------------------	---	-------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
2,5°	93.4	93.2	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.5
5,0°	102.6	102.9	102.9	103.0	102.9	102.9	103.0	103.0	103.1	103.3
7,5°	120.6	120.2	120.1	120.1	119.8	119.6	119.7	119.6	119.8	120.3
10,0°	139.0	139.1	138.5	138.4	137.3	136.8	136.8	136.3	136.6	137.5
12,5°	152.1	151.2	150.5	150.5	149.0	148.4	148.7	147.7	147.9	149.4
15,0°	158.5	157.9	157.9	158.4	157.4	157.4	158.2	157.5	157.6	159.0
17,5°	169.1	168.6	169.4	170.4	170.6	171.4	172.2	172.4	172.1	172.5
20,0°	182.5	183.9	185.1	185.3	186.6	187.2	186.8	186.8	186.6	186.5
22,5°	198.4	198.7	199.5	198.7	200.2	200.0	198.4	199.1	198.5	197.4
25,0°	207.3	209.4	209.1	207.0	208.7	208.9	206.7	207.5	207.4	205.9
27,5°	214.5	216.3	216.8	214.4	215.4	215.5	214.3	214.7	214.1	213.5
30,0°	219.3	221.6	223.0	220.8	221.0	222.5	222.0	220.9	220.0	219.9
32,5°	228.9	230.3	232.4	230.1	228.5	229.7	230.3	229.4	230.0	229.4
35,0°	237.2	241.2	242.0	238.8	237.4	239.3	241.5	239.9	239.5	240.8
37,5°	248.9	251.0	250.2	248.6	251.3	252.2	253.8	251.9	252.2	254.2
40,0°	262.2	264.6	262.5	260.0	264.5	267.0	266.1	268.6	268.1	269.8
42,5°	275.2	277.3	275.3	277.1	278.3	279.3	279.4	282.4	282.6	279.4
45,0°	279.6	282.1	287.0	288.7	292.2	290.7	292.2	296.1	294.8	291.7
47,5°	286.3	293.2	297.7	297.9	300.9	300.6	298.1	302.0	305.3	303.3
50,0°	290.6	300.3	303.8	303.4	309.8	305.6	300.3	305.1	308.1	314.0
52,5°	305.3	309.2	306.5	306.3	307.5	303.2	302.8	307.5	311.9	319.4
55,0°	311.0	305.4	298.9	300.0	292.0	289.0	292.6	299.2	298.2	304.3
57,5°	282.2	276.7	270.3	271.8	266.1	264.4	268.1	272.4	272.2	276.3
60,0°	247.6	245.5	244.2	239.0	236.3	232.0	232.9	238.4	241.6	244.4
62,5°	205.4	209.1	210.1	207.7	204.4	198.0	200.9	206.1	205.1	205.5
65,0°	177.5	177.6	176.7	178.2	173.4	171.3	172.2	176.4	174.3	174.3
67,5°	143.2	143.6	143.1	145.0	143.3	140.0	143.1	149.0	147.3	144.4
70,0°	114.9	113.5	112.8	112.7	112.4	110.9	112.3	119.6	115.8	111.4
72,5°	78.2	80.5	81.1	78.8	75.5	76.3	77.9	81.3	79.6	74.4
75,0°	50.1	48.6	45.8	43.9	43.4	42.5	42.2	43.8	44.5	42.1
77,5°	21.0	22.0	20.5	20.2	21.3	21.4	20.6	22.0	22.3	21.2
80,0°	9.7	9.8	9.3	9.1	9.7	10.1	9.8	10.2	9.9	9.2
82,5°	4.6	4.9	4.8	4.7	4.8	4.9	4.7	4.9	4.9	4.8
85,0°	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.4	2.3
87,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512836S008 EAN: 4069025024756	LP number 59489_22
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	0.1	0.1
2,5°	93.6	93.6	93.8	93.7	93.8	93.9	94.0	94.0	94.0	1.1	1.3
5,0°	103.5	103.8	104.1	104.3	104.4	104.7	104.7	104.8	104.8	2.5	3.7
7,5°	120.8	121.4	122.0	122.4	122.6	123.0	123.1	123.2	123.3	4.3	8.1
10,0°	137.7	138.2	139.0	139.1	139.5	140.3	140.0	140.2	140.7	6.6	14.7
12,5°	149.2	149.7	150.7	150.0	150.0	150.8	150.0	149.8	150.7	8.9	23.5
15,0°	158.8	159.0	159.7	158.5	158.3	159.1	158.1	157.8	158.5	11.2	34.8
17,5°	172.6	172.6	172.5	172.3	172.4	172.6	172.5	172.7	172.9	14.2	48.9
20,0°	187.2	186.9	186.0	186.5	187.0	186.8	187.9	188.4	188.0	17.5	66.4
22,5°	198.9	198.8	197.2	198.1	198.3	197.6	199.7	199.8	198.5	20.8	87.3
25,0°	207.7	207.1	204.7	205.8	206.0	204.4	206.4	206.2	204.0	24.0	111.2
27,5°	215.2	215.1	211.4	213.0	213.8	212.2	213.4	213.2	211.2	27.1	138.3
30,0°	222.0	221.9	217.5	218.7	221.0	221.0	221.2	219.6	217.4	30.3	168.6
32,5°	230.7	230.2	225.0	226.1	228.5	226.7	226.4	226.4	224.8	33.7	202.3
35,0°	242.1	239.9	236.9	238.1	238.4	235.2	234.4	234.3	233.1	37.5	239.8
37,5°	257.9	254.0	251.8	253.1	250.1	245.3	243.6	245.6	246.2	41.9	281.6
40,0°	273.6	269.3	265.8	265.6	261.7	256.1	255.0	256.8	259.0	46.6	328.2
42,5°	285.3	281.6	279.0	274.3	269.2	263.3	265.7	264.5	267.2	51.1	379.3
45,0°	297.6	293.5	288.2	281.5	275.3	270.1	269.7	268.3	269.2	55.3	434.6
47,5°	302.4	302.0	297.7	297.7	286.4	279.5	278.0	272.6	267.2	59.4	494.0
50,0°	313.4	311.6	307.2	305.6	299.1	285.9	281.3	274.1	271.1	63.1	557.1
52,5°	323.8	318.5	305.3	297.3	291.6	281.4	286.1	278.0	266.0	65.8	622.9
55,0°	308.6	301.6	284.6	267.9	262.8	266.7	273.7	261.2	253.9	64.7	687.6
57,5°	281.4	273.7	260.4	243.6	239.6	241.8	248.4	242.0	234.7	60.7	748.3
60,0°	252.7	236.3	225.6	218.2	209.4	207.3	215.1	212.9	207.5	54.9	803.2
62,5°	210.3	199.3	188.5	191.6	187.9	180.1	183.3	184.8	175.8	48.1	851.3
65,0°	177.5	172.0	164.5	167.2	167.2	158.3	157.6	157.0	151.2	42.2	893.6
67,5°	143.0	139.2	137.6	142.5	139.9	135.1	129.6	129.7	130.3	35.6	929.2
70,0°	108.8	106.6	108.9	113.6	113.6	108.1	104.3	105.9	104.6	28.6	957.8
72,5°	72.6	73.7	76.1	79.3	78.8	76.0	73.7	73.5	74.9	20.1	977.9
75,0°	42.7	43.0	42.7	43.6	43.1	44.3	40.7	40.8	41.6	11.5	989.5
77,5°	21.9	21.5	21.5	22.1	20.4	19.9	19.5	19.9	19.4	5.6	995.1
80,0°	9.5	9.8	9.7	10.1	9.8	9.4	9.7	9.9	9.3	2.6	997.7
82,5°	4.9	5.0	4.9	5.3	5.0	4.8	5.1	5.2	4.9	1.3	999.0
85,0°	2.4	2.4	2.4	2.4	2.4	2.3	2.5	2.4	2.3	0.6	999.7
87,5°	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.2	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512836S008 EAN: 4069025024756	LP number 59489_22
-----------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	3050	28.6	29.3	29.0
95	241	2902	27.2	27.8	27.5
90	227	2740	25.6	26.3	26.0
85	214	2590	24.2	24.9	24.5
80	201	2438	22.8	23.4	23.1
75	188	2287	21.4	21.9	21.6
70	175	2134	20.0	20.5	20.2
65	162	1980	18.7	19.1	18.9
60	149	1825	17.3	17.7	17.5
55	137	1681	16.0	16.4	16.2
50	124	1524	14.7	15.1	14.9
45	111	1367	13.4	13.7	13.6
40	99	1221	12.2	12.5	12.4
35	86	1062	10.9	11.2	11.0
30	74	915	9.8	9.9	9.9
25	62	767	8.6	8.7	8.6
20	49	605	7.2	7.4	7.3
17	41	504	6.5	6.6	6.6