

Photometric test report

Family
DL® 20 LED

Order number: 5XA51283NS008P
EAN: 4058352271865

LP number
59489_21



Version post-top mounting
Optic symmetric, wide distribution (PL1.2s)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG Plus
Rated values Net luminous flux = 5400 lm
Power consumption = 41.9 W
Luminous efficacy = 128.9 lm/W

serial
documentation
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 324 cd/klm

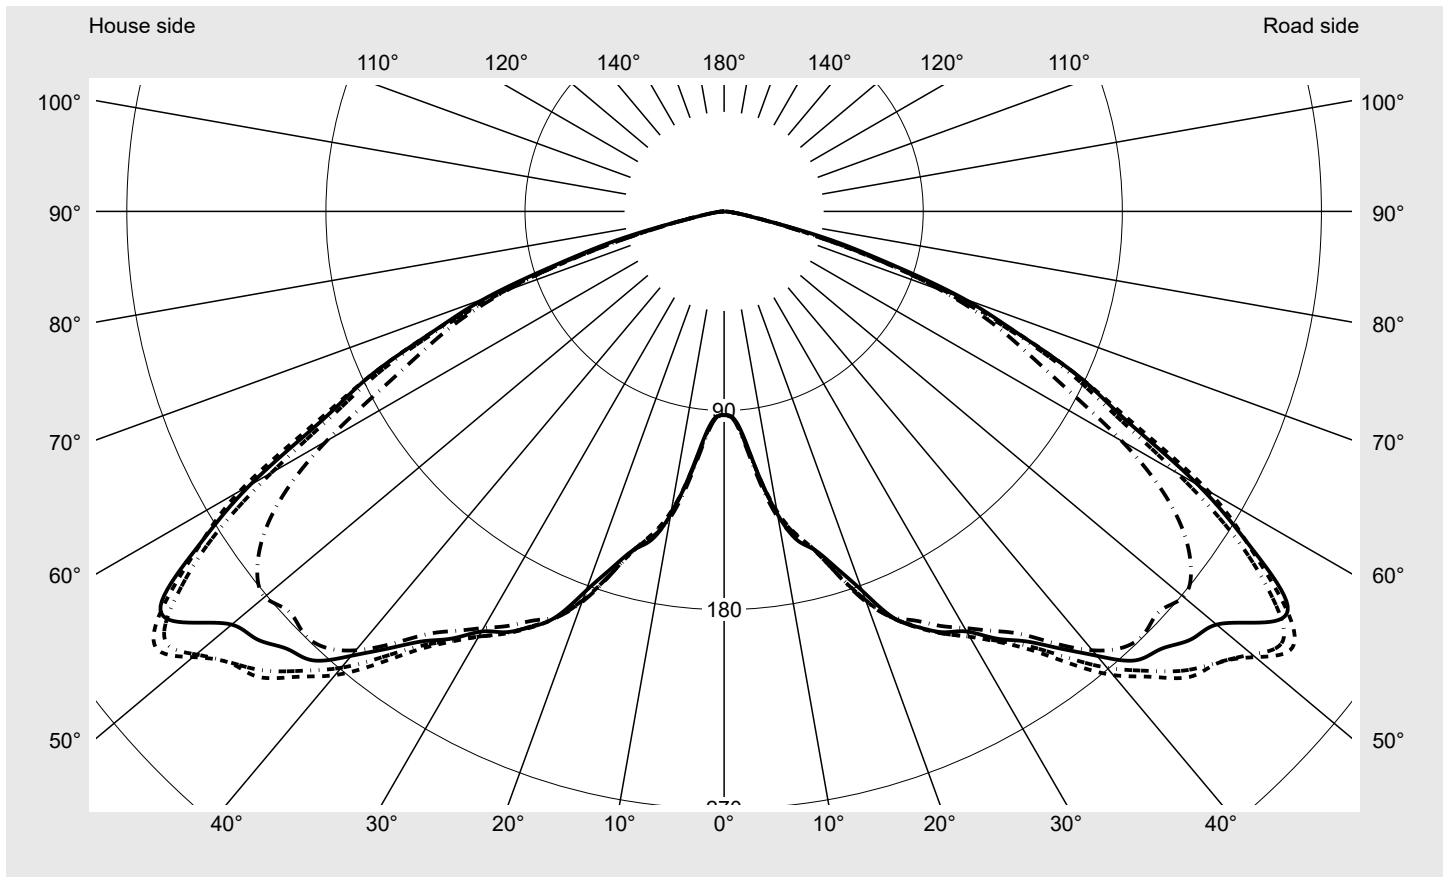

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	119.6
Imax 80°	10.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008P EAN: 4058352271865	LP number 59489_21
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 52.5°** **KMK 50°** **KMK 47.5°** **KMK 45°** **siteco**

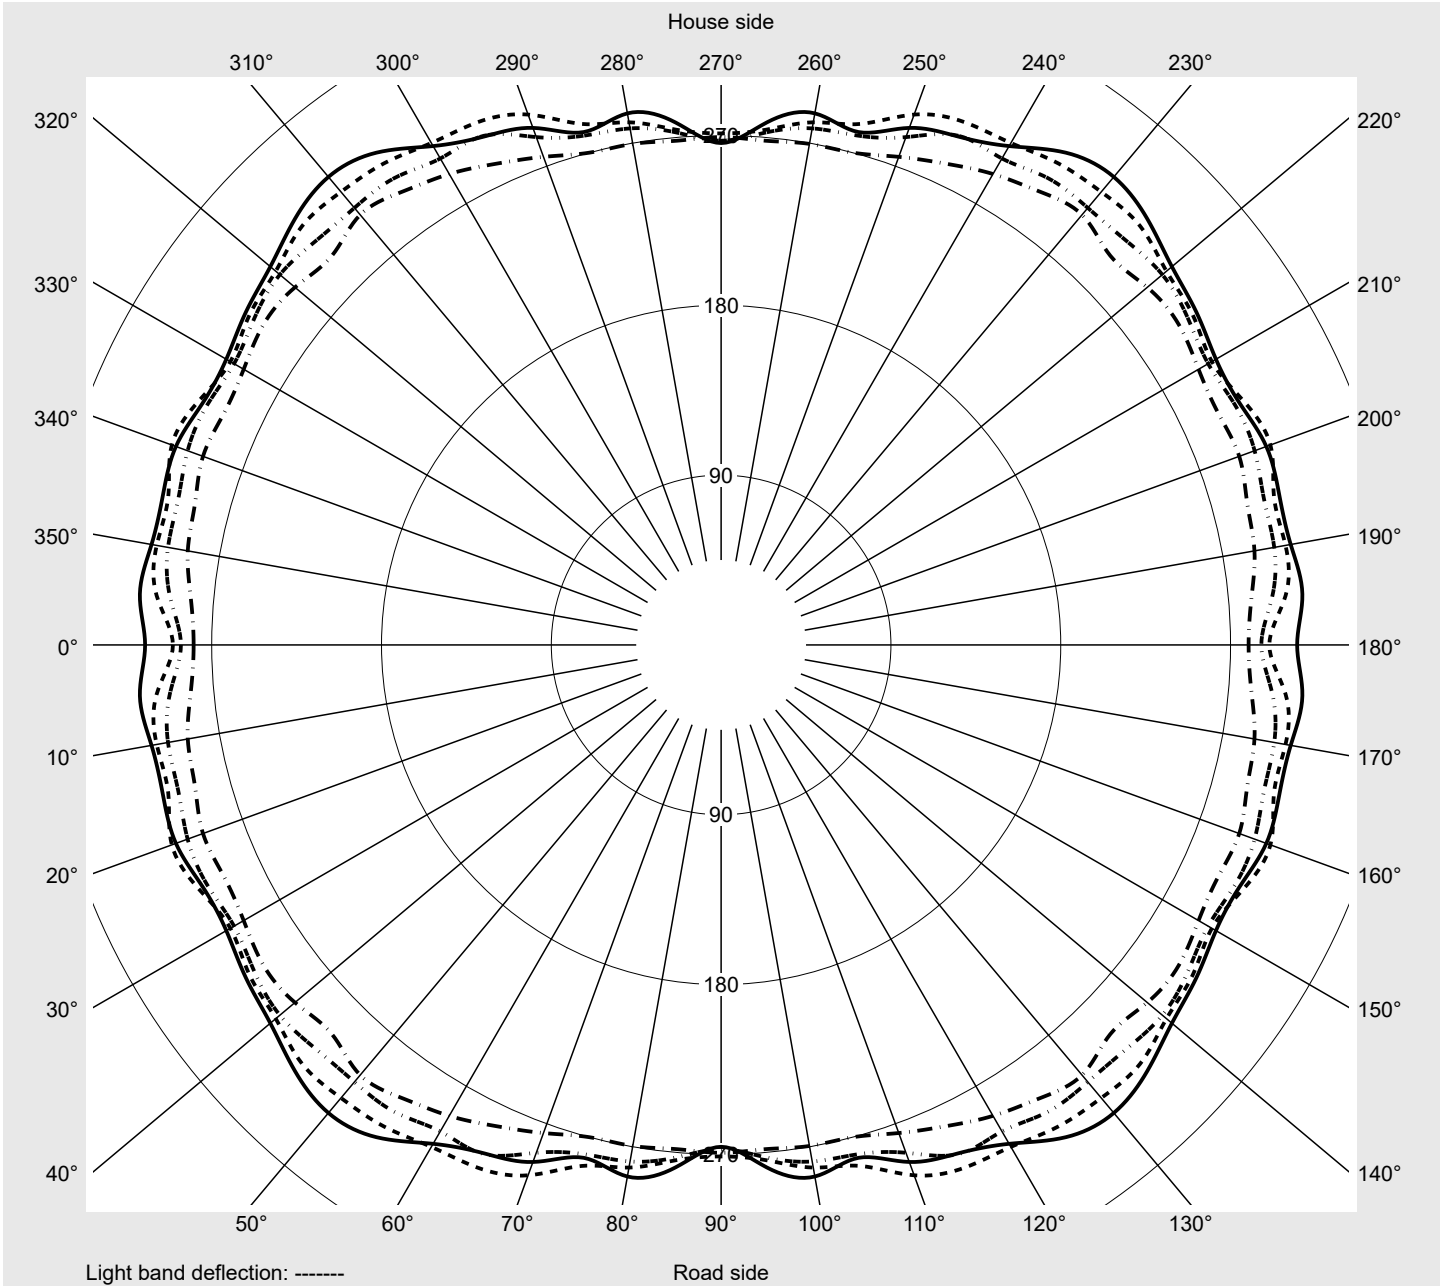

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008P EAN: 4058352271865	LP number 59489_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
2,5°	93.4	93.2	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.5
5,0°	102.6	102.9	102.9	103.0	102.9	102.9	103.0	103.0	103.1	103.3
7,5°	120.6	120.2	120.1	120.1	119.8	119.6	119.7	119.6	119.8	120.3
10,0°	139.0	139.1	138.5	138.4	137.3	136.8	136.8	136.3	136.6	137.5
12,5°	152.1	151.2	150.5	150.5	149.0	148.4	148.7	147.7	147.9	149.4
15,0°	158.5	157.9	157.9	158.4	157.4	157.4	158.2	157.5	157.6	159.0
17,5°	169.1	168.6	169.4	170.4	170.6	171.4	172.2	172.4	172.1	172.5
20,0°	182.5	183.9	185.1	185.3	186.6	187.2	186.8	186.8	186.6	186.5
22,5°	198.4	198.7	199.5	198.7	200.2	200.0	198.4	199.1	198.5	197.4
25,0°	207.3	209.4	209.1	207.0	208.7	208.9	206.7	207.5	207.4	205.9
27,5°	214.5	216.3	216.8	214.4	215.4	215.5	214.3	214.7	214.1	213.5
30,0°	219.3	221.6	223.0	220.8	221.0	222.5	222.0	220.9	220.0	219.9
32,5°	228.9	230.3	232.4	230.1	228.5	229.7	230.3	229.4	230.0	229.4
35,0°	237.2	241.2	242.0	238.8	237.4	239.3	241.5	239.9	239.5	240.8
37,5°	248.9	251.0	250.2	248.6	251.3	252.2	253.8	251.9	252.2	254.2
40,0°	262.2	264.6	262.5	260.0	264.5	267.0	266.1	268.6	268.1	269.8
42,5°	275.2	277.3	275.3	277.1	278.3	279.3	279.4	282.4	282.6	279.4
45,0°	279.6	282.1	287.0	288.7	292.2	290.7	292.2	296.1	294.8	291.7
47,5°	286.3	293.2	297.7	297.9	300.9	300.6	298.1	302.0	305.3	303.3
50,0°	290.6	300.3	303.8	303.4	309.8	305.6	300.3	305.1	308.1	314.0
52,5°	305.3	309.2	306.5	306.3	307.5	303.2	302.8	307.5	311.9	319.4
55,0°	311.0	305.4	298.9	300.0	292.0	289.0	292.6	299.2	298.2	304.3
57,5°	282.2	276.7	270.3	271.8	266.1	264.4	268.1	272.4	272.2	276.3
60,0°	247.6	245.5	244.2	239.0	236.3	232.0	232.9	238.4	241.6	244.4
62,5°	205.4	209.1	210.1	207.7	204.4	198.0	200.9	206.1	205.1	205.5
65,0°	177.5	177.6	176.7	178.2	173.4	171.3	172.2	176.4	174.3	174.3
67,5°	143.2	143.6	143.1	145.0	143.3	140.0	143.1	149.0	147.3	144.4
70,0°	114.9	113.5	112.8	112.7	112.4	110.9	112.3	119.6	115.8	111.4
72,5°	78.2	80.5	81.1	78.8	75.5	76.3	77.9	81.3	79.6	74.4
75,0°	50.1	48.6	45.8	43.9	43.4	42.5	42.2	43.8	44.5	42.1
77,5°	21.0	22.0	20.5	20.2	21.3	21.4	20.6	22.0	22.3	21.2
80,0°	9.7	9.8	9.3	9.1	9.7	10.1	9.8	10.2	9.9	9.2
82,5°	4.6	4.9	4.8	4.7	4.8	4.9	4.7	4.9	4.9	4.8
85,0°	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.4	2.3
87,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008P EAN: 4058352271865	LP number 59489_21
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	0.1	0.1
2,5°	93.6	93.6	93.8	93.7	93.8	93.9	94.0	94.0	94.0	1.1	1.3
5,0°	103.5	103.8	104.1	104.3	104.4	104.7	104.7	104.8	104.8	2.5	3.7
7,5°	120.8	121.4	122.0	122.4	122.6	123.0	123.1	123.2	123.3	4.3	8.1
10,0°	137.7	138.2	139.0	139.1	139.5	140.3	140.0	140.2	140.7	6.6	14.7
12,5°	149.2	149.7	150.7	150.0	150.0	150.8	150.0	149.8	150.7	8.9	23.5
15,0°	158.8	159.0	159.7	158.5	158.3	159.1	158.1	157.8	158.5	11.2	34.8
17,5°	172.6	172.6	172.5	172.3	172.4	172.6	172.5	172.7	172.9	14.2	48.9
20,0°	187.2	186.9	186.0	186.5	187.0	186.8	187.9	188.4	188.0	17.5	66.4
22,5°	198.9	198.8	197.2	198.1	198.3	197.6	199.7	199.8	198.5	20.8	87.3
25,0°	207.7	207.1	204.7	205.8	206.0	204.4	206.4	206.2	204.0	24.0	111.2
27,5°	215.2	215.1	211.4	213.0	213.8	212.2	213.4	213.2	211.2	27.1	138.3
30,0°	222.0	221.9	217.5	218.7	221.0	221.0	221.2	219.6	217.4	30.3	168.6
32,5°	230.7	230.2	225.0	226.1	228.5	226.7	226.4	226.4	224.8	33.7	202.3
35,0°	242.1	239.9	236.9	238.1	238.4	235.2	234.4	234.3	233.1	37.5	239.8
37,5°	257.9	254.0	251.8	253.1	250.1	245.3	243.6	245.6	246.2	41.9	281.6
40,0°	273.6	269.3	265.8	265.6	261.7	256.1	255.0	256.8	259.0	46.6	328.2
42,5°	285.3	281.6	279.0	274.3	269.2	263.3	265.7	264.5	267.2	51.1	379.3
45,0°	297.6	293.5	288.2	281.5	275.3	270.1	269.7	268.3	269.2	55.3	434.6
47,5°	302.4	302.0	297.7	297.7	286.4	279.5	278.0	272.6	267.2	59.4	494.0
50,0°	313.4	311.6	307.2	305.6	299.1	285.9	281.3	274.1	271.1	63.1	557.1
52,5°	323.8	318.5	305.3	297.3	291.6	281.4	286.1	278.0	266.0	65.8	622.9
55,0°	308.6	301.6	284.6	267.9	262.8	266.7	273.7	261.2	253.9	64.7	687.6
57,5°	281.4	273.7	260.4	243.6	239.6	241.8	248.4	242.0	234.7	60.7	748.3
60,0°	252.7	236.3	225.6	218.2	209.4	207.3	215.1	212.9	207.5	54.9	803.2
62,5°	210.3	199.3	188.5	191.6	187.9	180.1	183.3	184.8	175.8	48.1	851.3
65,0°	177.5	172.0	164.5	167.2	167.2	158.3	157.6	157.0	151.2	42.2	893.6
67,5°	143.0	139.2	137.6	142.5	139.9	135.1	129.6	129.7	130.3	35.6	929.2
70,0°	108.8	106.6	108.9	113.6	113.6	108.1	104.3	105.9	104.6	28.6	957.8
72,5°	72.6	73.7	76.1	79.3	78.8	76.0	73.7	73.5	74.9	20.1	977.9
75,0°	42.7	43.0	42.7	43.6	43.1	44.3	40.7	40.8	41.6	11.5	989.5
77,5°	21.9	21.5	21.5	22.1	20.4	19.9	19.5	19.9	19.4	5.6	995.1
80,0°	9.5	9.8	9.7	10.1	9.8	9.4	9.7	9.9	9.3	2.6	997.7
82,5°	4.9	5.0	4.9	5.3	5.0	4.8	5.1	5.2	4.9	1.3	999.0
85,0°	2.4	2.4	2.4	2.4	2.4	2.3	2.5	2.4	2.3	0.6	999.7
87,5°	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.2	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA51283NS008P EAN: 4058352271865	LP number 59489_21
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	5400	41.9	43.0	42.4
95	240	5123	39.5	40.5	40.0
90	227	4864	37.3	38.4	37.8
85	213	4582	35.0	35.9	35.4
80	200	4318	32.9	33.8	33.3
75	187	4052	30.7	31.6	31.2
70	174	3786	28.7	29.4	29.0
65	161	3516	26.6	27.3	27.0
60	148	3243	24.5	25.2	24.8
55	135	2969	22.5	23.1	22.8
50	122	2692	20.4	21.0	20.7
45	110	2435	18.6	19.0	18.8
40	97	2154	16.6	17.0	16.8
35	85	1892	14.8	15.1	15.0
30	73	1629	13.0	13.3	13.2
25	60	1342	11.1	11.4	11.2
20	48	1075	9.4	9.6	9.5
15	36	805	7.6	7.8	7.7
12	28	624	6.5	6.6	6.6