

## Photometric test report

Family  
DL® 20 LED

Order number: 5XA51283WR008  
EAN: 4058352271926

LP number  
59488\_26



Version	post-top mounting
Optic	asymmetric, extremely wide distribution (P1.0a)
Cover	toughened safety glass
Lamps	LED 3000 K   CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 3060 lm Power consumption = 24.6 W Luminous efficacy = 124.4 lm/W

serial  
documentation  
07.12.2023

siteco

Luminous intensity in cd/klm


**C180-0**

C190-10

C195-15

C270-90

Imax: 427 cd/klm

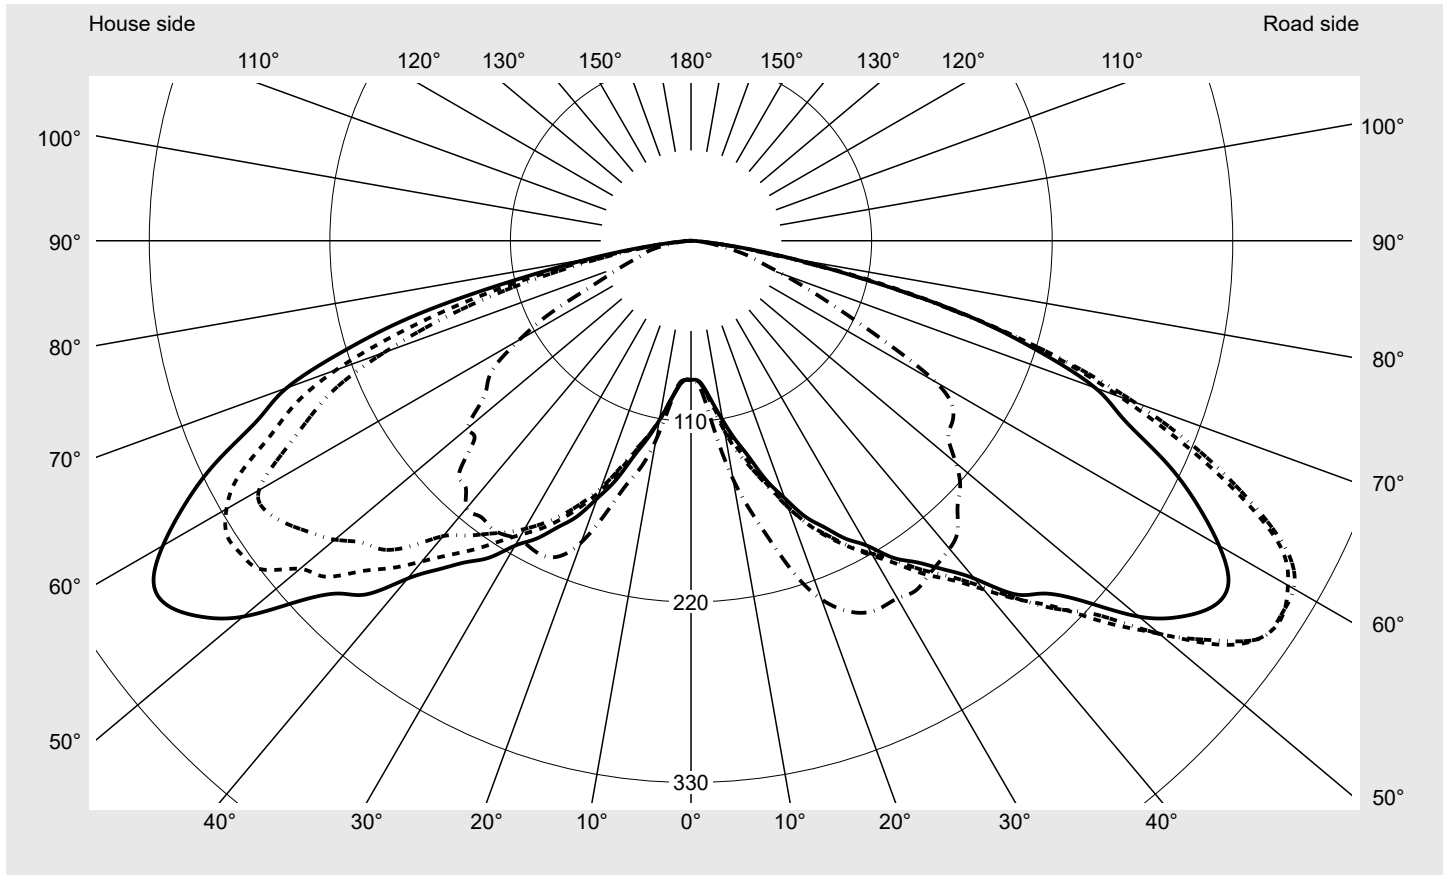

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	291.0
Imax 80°	62.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

# Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WR008</b> <b>EAN: 4058352271926</b>	<b>LP number</b> <b>59488_26</b>
------------------------------------	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 57.5°**   **KMK 55°**   **KMK 52.5°**   **KMK 50°**      **siteco**

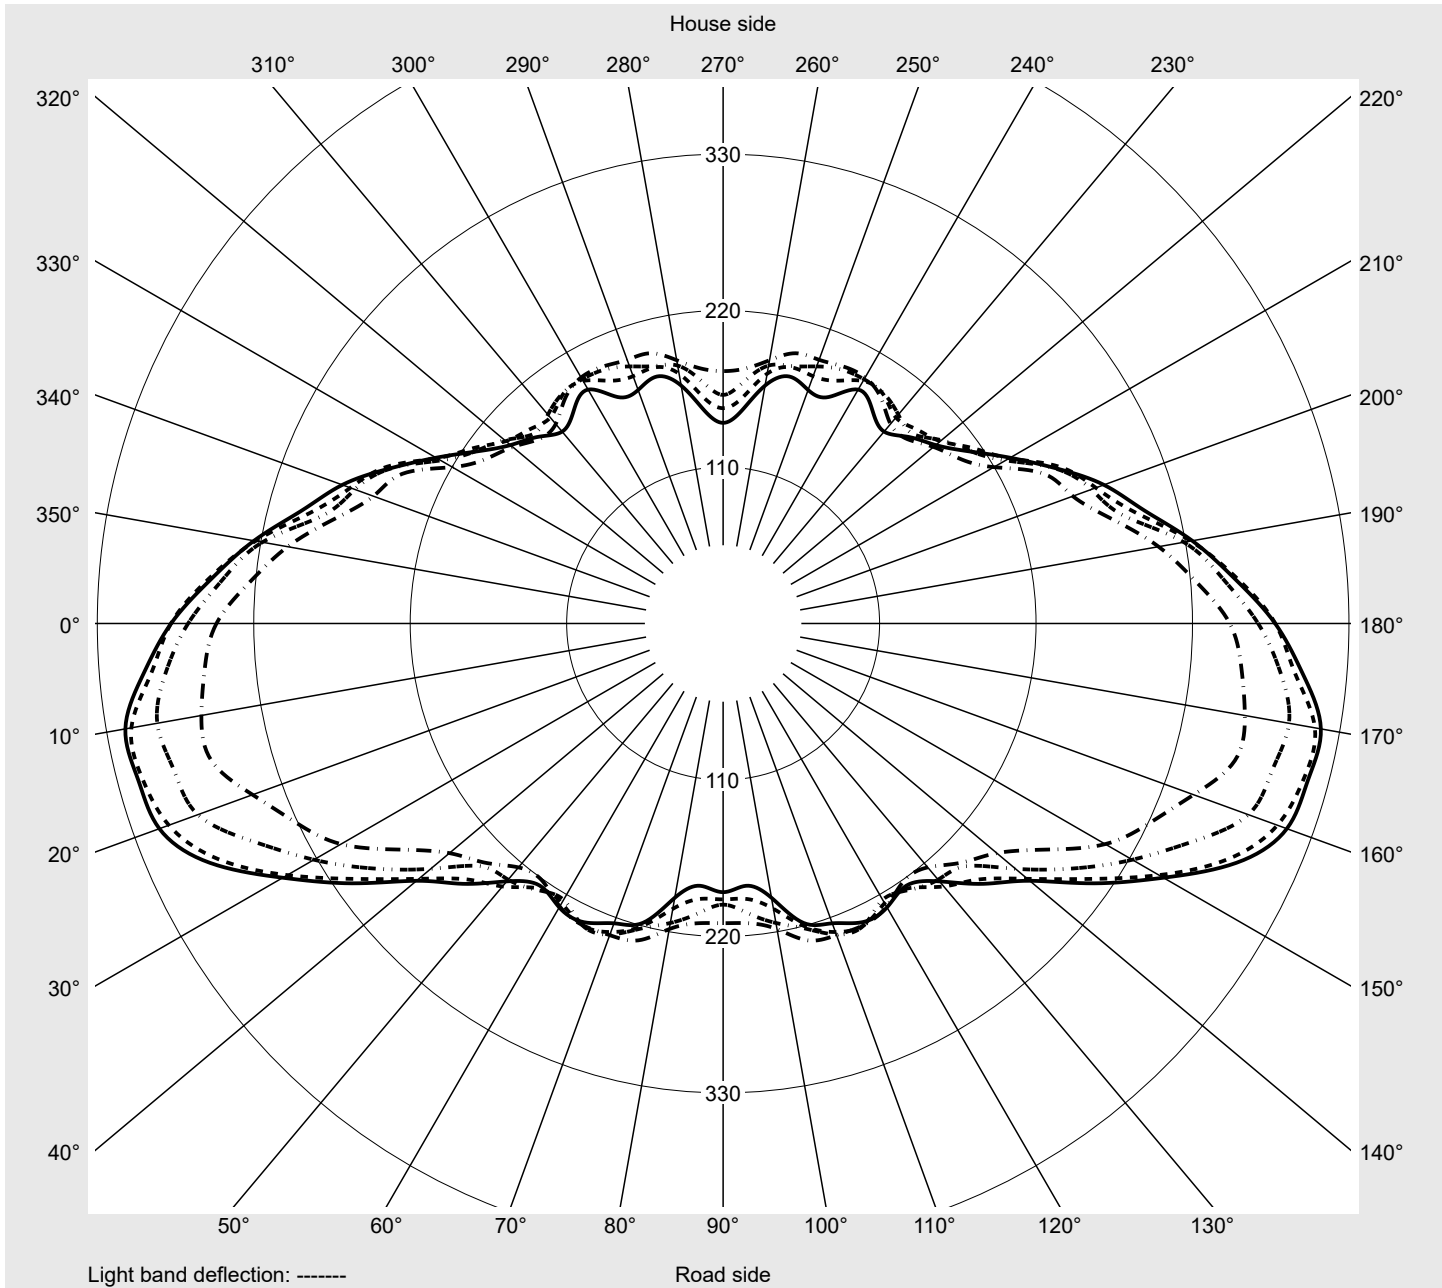

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WR008</b> <b>EAN: 4058352271926</b>	<b>LP number</b> <b>59488_26</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	85.0	85.0	85.0	85.2	85.3	85.2	85.4	85.5	85.6	85.8	85.9	85.9	86.3
5,0°	89.6	90.0	90.3	90.7	91.2	91.5	92.1	92.8	93.3	94.0	94.6	95.0	95.9
7,5°	99.2	100.0	100.9	102.4	103.9	105.3	107.1	108.9	110.4	112.3	113.5	114.8	116.5
10,0°	111.0	113.0	115.1	117.8	120.6	123.2	126.3	128.3	130.1	132.8	133.7	135.2	138.1
12,5°	123.8	126.0	128.8	132.2	135.0	137.9	141.4	142.9	144.3	146.7	147.1	148.7	152.2
15,0°	136.5	139.0	141.6	144.0	145.8	149.2	153.2	155.7	158.6	162.2	163.6	166.4	170.9
17,5°	153.2	154.7	156.3	157.7	160.1	164.8	170.0	174.1	178.6	183.3	186.6	191.1	196.4
20,0°	166.9	170.5	172.1	172.8	175.4	180.4	185.2	188.7	191.6	194.3	199.1	205.0	210.5
22,5°	181.9	185.6	187.3	187.0	189.0	192.2	195.0	197.4	198.3	199.7	205.0	211.5	217.2
25,0°	192.7	198.4	199.6	198.4	199.5	200.0	201.1	203.7	203.4	203.7	209.1	215.5	221.9
27,5°	204.8	209.3	210.6	209.9	209.4	206.7	206.3	208.8	209.1	208.8	212.2	219.0	227.0
30,0°	214.5	219.4	221.7	220.0	216.5	213.4	211.2	212.8	215.2	212.8	216.1	223.7	231.4
32,5°	228.9	232.4	233.4	230.7	227.6	223.1	216.4	218.2	222.3	218.5	219.7	227.9	235.4
35,0°	239.0	245.8	247.9	244.5	242.1	232.3	225.2	226.8	229.3	223.7	222.1	228.7	235.2
37,5°	252.2	260.1	260.4	257.5	258.2	248.8	237.4	237.1	234.5	227.7	226.7	231.0	235.0
40,0°	268.7	277.0	277.2	274.7	277.0	262.4	250.3	247.3	240.1	233.8	232.7	234.4	239.7
42,5°	292.0	292.6	296.7	296.4	294.2	278.8	260.6	251.5	243.8	233.0	234.0	234.8	237.4
45,0°	303.9	311.1	316.0	317.5	313.1	292.9	276.4	260.2	246.0	232.1	231.5	233.3	235.5
47,5°	325.4	337.3	344.8	337.9	328.1	311.5	289.8	267.6	245.4	230.2	228.4	226.4	229.5
50,0°	356.2	365.9	372.5	372.5	352.0	331.3	310.2	277.1	251.2	237.6	223.8	221.2	229.8
52,5°	376.2	393.3	404.0	399.6	393.0	363.4	332.2	300.3	268.3	241.3	235.1	228.6	224.3
55,0°	388.2	403.7	422.5	422.6	414.7	391.8	353.8	313.1	279.3	254.5	241.3	227.2	227.0
57,5°	388.1	409.2	426.7	425.7	421.8	398.1	357.5	318.5	281.4	258.8	236.7	224.9	230.4
60,0°	371.5	398.9	419.8	423.9	418.9	391.5	349.4	304.2	268.0	244.3	218.8	215.6	225.7
62,5°	347.5	376.5	405.2	409.3	399.8	375.5	330.2	279.9	244.1	213.1	188.6	193.0	198.9
65,0°	319.1	340.2	370.3	376.1	367.6	347.2	308.8	252.6	215.5	183.9	160.5	170.1	162.8
67,5°	285.9	303.0	326.3	335.6	331.5	310.6	275.2	221.8	195.7	160.5	130.9	142.4	125.7
70,0°	262.1	266.9	278.4	287.3	291.0	272.8	233.9	190.1	169.6	132.3	99.9	110.8	95.1
72,5°	219.8	223.5	229.2	231.6	238.8	229.8	187.3	155.5	138.1	105.1	82.1	80.2	68.6
75,0°	171.0	169.4	171.8	167.8	172.9	173.4	139.2	116.0	108.9	84.3	63.9	56.5	52.5
77,5°	107.7	114.4	112.8	108.2	107.3	109.5	86.8	71.4	76.7	57.3	44.4	39.5	37.5
80,0°	61.9	62.7	61.1	54.6	54.0	59.6	39.6	34.0	43.6	27.7	22.9	22.2	22.8
82,5°	27.6	27.0	26.5	24.1	22.0	27.1	15.6	14.5	22.1	10.9	10.3	11.0	12.2
85,0°	8.1	7.4	6.9	6.6	6.3	9.8	6.0	5.4	9.0	4.8	4.5	4.6	4.9
87,5°	2.2	2.1	2.1	2.0	2.0	2.2	1.8	1.8	2.0	1.6	1.6	1.6	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL® 20 LED</b>	<b>Order number: 5XA51283WR008</b> <b>EAN: 4058352271926</b>	<b>LP number</b> <b>59488_26</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
2,5°	86.4	86.4	86.7	86.7	86.7	86.8	84.8	84.8	84.9	84.8	84.7	84.8	84.6
5,0°	96.3	96.6	97.3	97.2	97.5	97.9	89.6	89.5	89.4	89.1	89.1	89.1	88.9
7,5°	117.4	118.4	119.8	119.9	120.4	121.4	98.8	98.7	98.8	99.0	99.4	99.7	100.2
10,0°	139.0	140.9	143.9	144.6	146.0	147.5	110.7	110.8	111.1	111.6	112.6	114.0	115.4
12,5°	153.7	156.9	162.1	164.1	166.6	169.1	122.7	122.2	122.2	122.4	123.3	125.1	126.6
15,0°	173.0	177.0	182.5	184.8	187.8	190.7	135.3	133.6	132.5	131.8	132.5	134.7	136.5
17,5°	199.9	204.5	209.3	211.2	213.0	214.6	150.5	148.1	146.0	145.5	147.5	150.7	152.8
20,0°	216.7	222.7	227.0	230.6	232.2	232.5	165.4	162.4	160.3	160.5	162.6	165.8	167.2
22,5°	225.4	232.4	237.2	242.2	244.1	243.6	178.4	175.3	172.6	172.5	173.0	173.6	174.6
25,0°	231.4	237.6	241.5	247.2	250.0	250.0	190.2	187.1	183.8	182.3	179.6	178.8	180.8
27,5°	236.4	240.6	243.5	250.0	253.2	251.7	200.9	197.6	193.9	190.7	185.4	183.9	184.8
30,0°	239.3	241.7	244.2	250.1	252.8	251.6	211.6	206.6	202.7	197.8	193.1	189.9	188.4
32,5°	240.5	244.3	245.8	248.2	252.1	253.3	223.2	217.1	210.6	205.6	199.9	194.5	189.5
35,0°	242.0	245.8	245.8	245.5	248.1	250.4	236.4	229.4	218.1	212.5	205.7	196.8	191.8
37,5°	240.8	243.3	242.8	243.9	245.7	247.5	247.4	241.1	226.4	218.5	214.8	203.6	197.9
40,0°	243.0	242.9	241.3	243.1	244.3	244.9	261.9	255.0	234.8	228.5	223.3	210.2	207.7
42,5°	242.3	243.5	242.7	241.5	242.8	240.3	281.1	270.4	252.1	239.3	232.4	212.9	206.9
45,0°	241.1	241.5	237.4	239.2	235.1	229.6	294.1	284.8	265.9	246.2	233.5	216.3	200.5
47,5°	243.2	235.3	231.2	233.6	225.9	222.4	314.7	302.8	272.1	255.9	241.4	216.3	199.9
50,0°	233.9	233.2	230.6	218.2	211.6	210.7	334.0	310.9	283.3	261.7	248.9	219.8	202.4
52,5°	234.1	232.7	222.0	213.8	204.7	197.7	353.3	329.0	292.0	275.6	257.8	229.3	211.7
55,0°	234.0	230.8	220.2	203.7	194.5	194.0	362.8	333.8	300.6	278.9	260.8	232.3	214.8
57,5°	231.7	224.3	217.9	195.8	185.1	188.9	361.1	334.9	306.7	284.9	258.2	233.1	211.0
60,0°	217.5	209.8	211.0	180.9	164.1	172.2	349.9	326.7	303.9	279.1	249.8	222.2	196.9
62,5°	193.3	185.0	177.2	155.6	136.2	133.9	331.1	310.9	280.8	253.3	227.8	197.5	169.3
65,0°	160.7	156.3	135.0	118.7	107.7	101.0	305.6	283.8	257.2	230.6	203.7	173.9	146.0
67,5°	124.5	131.5	97.5	88.5	87.9	77.4	277.9	261.6	233.8	209.2	186.1	154.9	127.6
70,0°	87.1	97.6	70.5	67.2	69.1	58.9	247.4	230.1	198.8	177.6	161.3	133.7	108.4
72,5°	60.3	63.7	51.4	50.1	50.1	45.1	206.9	186.0	159.9	143.6	134.8	108.6	85.2
75,0°	46.9	44.6	41.7	40.4	36.9	37.2	154.2	138.8	118.3	105.8	102.4	79.7	60.4
77,5°	34.8	31.9	32.1	30.5	28.3	26.8	102.4	91.8	76.9	70.0	71.0	51.1	38.7
80,0°	22.4	21.2	21.6	21.1	19.0	17.3	56.8	52.6	44.7	39.6	42.9	23.7	20.2
82,5°	12.3	11.6	12.2	11.8	10.7	10.3	25.8	24.7	21.0	18.6	22.1	11.7	9.3
85,0°	5.1	5.0	5.0	5.0	4.7	4.7	7.4	7.3	6.5	6.3	8.4	5.0	4.0
87,5°	1.6	1.5	1.6	1.5	1.4	1.4	2.2	2.2	2.1	2.0	2.1	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL® 20 LED</b>	Order number: <b>5XA51283WR008</b> EAN: <b>4058352271926</b>	LP number <b>59488_26</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	0.1	0.1
2,5°	84.6	84.6	84.6	84.5	84.6	84.6	84.5	84.7	84.6	84.5	84.8	1.0	1.1
5,0°	89.0	88.8	88.7	88.5	88.4	88.2	88.0	88.0	87.8	87.8	88.1	2.2	3.3
7,5°	100.8	101.2	101.5	101.8	102.1	102.0	102.0	102.1	101.8	101.8	102.1	3.8	7.1
10,0°	116.9	118.3	119.2	120.2	121.8	122.0	122.2	123.0	122.4	122.4	123.3	5.9	13.0
12,5°	128.2	130.5	131.7	133.5	136.3	136.6	137.5	140.0	139.9	140.4	141.4	8.2	21.2
15,0°	137.6	140.2	141.8	143.8	147.4	148.5	150.0	152.9	153.0	153.6	154.9	10.8	32.0
17,5°	153.6	155.4	157.5	160.0	164.8	167.2	169.4	172.7	173.5	174.0	175.1	14.1	46.1
20,0°	167.3	167.9	170.0	173.7	179.3	183.5	186.8	190.7	193.5	195.0	195.5	17.5	63.6
22,5°	174.8	174.7	177.2	182.0	186.7	192.1	197.8	201.7	206.1	207.7	207.8	20.6	84.2
25,0°	179.9	178.4	182.3	187.5	191.3	197.2	203.4	207.7	211.9	212.9	211.9	23.6	107.8
27,5°	182.1	181.5	187.1	192.0	193.6	200.1	208.0	212.2	217.6	216.3	211.1	26.5	134.2
30,0°	184.4	184.0	190.7	193.8	194.9	201.6	209.0	216.0	221.5	216.5	209.9	29.3	163.5
32,5°	185.6	187.1	193.6	195.0	197.3	202.3	210.2	217.7	221.3	217.0	212.3	32.2	195.7
35,0°	189.4	191.3	197.1	196.9	200.2	202.8	210.3	217.0	219.5	215.4	213.0	35.1	230.8
37,5°	195.1	196.5	197.6	198.7	202.4	205.4	210.6	217.3	217.0	213.1	211.5	38.1	268.8
40,0°	201.9	193.2	195.9	198.5	203.8	207.5	213.6	219.6	218.8	214.9	212.8	41.4	310.2
42,5°	196.5	191.5	193.9	196.4	203.0	208.2	210.4	217.9	212.7	208.0	203.3	44.3	354.5
45,0°	189.1	187.4	186.8	190.8	200.7	204.8	203.1	209.4	205.5	200.9	199.6	46.8	401.3
47,5°	190.3	182.9	185.2	190.8	196.7	200.7	200.7	198.1	201.3	190.2	179.0	49.5	450.8
50,0°	193.1	183.3	183.1	193.5	199.7	199.4	197.3	196.7	187.9	180.0	177.4	52.5	503.3
52,5°	200.5	188.5	191.6	197.2	198.2	197.0	192.3	187.4	184.1	170.9	160.7	56.2	559.5
55,0°	199.4	192.8	189.0	196.5	196.9	188.3	185.0	186.4	178.3	159.7	151.4	59.0	618.5
57,5°	195.1	185.3	176.1	183.0	189.9	175.7	174.7	179.8	169.8	150.2	141.0	60.2	678.6
60,0°	180.8	174.5	161.1	169.4	176.8	161.4	161.1	163.6	151.7	128.5	120.8	58.9	737.6
62,5°	155.4	148.2	135.0	146.4	149.8	136.7	145.6	139.5	120.9	102.7	98.8	54.5	792.1
65,0°	137.5	125.2	108.7	112.1	107.6	103.9	116.2	104.2	87.5	76.1	70.6	48.4	840.5
67,5°	124.8	105.1	87.0	87.7	79.7	79.3	91.9	76.6	57.6	55.2	53.7	42.5	883.0
70,0°	105.0	84.0	64.3	68.2	53.1	55.2	67.3	55.8	44.5	42.9	42.8	36.0	919.0
72,5°	81.5	66.9	46.6	44.5	37.3	37.1	46.8	40.8	37.2	35.0	33.9	29.1	948.1
75,0°	62.9	52.4	34.8	29.8	29.2	29.8	31.9	32.3	32.5	29.9	29.4	22.2	970.3
77,5°	45.9	34.6	22.1	21.7	21.9	22.9	23.3	25.7	26.7	24.3	23.7	15.1	985.3
80,0°	26.9	17.1	13.5	14.1	15.2	16.0	16.1	17.6	18.4	16.9	16.1	8.6	993.9
82,5°	13.3	7.7	7.0	7.7	9.1	9.2	9.2	9.9	10.4	9.6	9.3	4.1	998.0
85,0°	6.4	3.7	3.5	3.7	4.0	4.1	4.0	4.1	4.2	4.0	3.9	1.5	999.5
87,5°	2.0	1.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> DL® 20 LED	<b>Order number: 5XA51283WR008</b> <b>EAN: 4058352271926</b>	<b>LP number</b> 59488_26
-----------------------------	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	3060	24.6	25.2	24.9
95	241	2909	23.4	23.9	23.6
90	228	2759	22.2	22.7	22.4
85	215	2606	21.0	21.4	21.2
80	202	2454	19.8	20.2	20.0
75	189	2301	18.6	19.1	18.8
70	176	2147	17.5	17.8	17.6
65	163	1991	16.3	16.6	16.5
60	150	1835	15.2	15.4	15.3
55	137	1679	14.0	14.3	14.2
50	125	1534	13.0	13.2	13.1
45	112	1376	11.9	12.1	12.0
40	100	1230	10.9	11.1	11.0
35	87	1071	9.8	9.9	9.9
30	75	924	8.8	8.9	8.9
25	62	763	7.7	7.8	7.8
20	50	613	6.6	6.7	6.6
19	48	588	6.5	6.6	6.6