




# Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL1DDN46XG</b> <b>EAN: 4058352049792</b>	<b>LP number</b> <b>59520_132</b>
	<b>Version</b> cover, opal, direct-/ indirect distribution, diffuse <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 6320 lm Power consumption = 35.2 W Luminous efficacy = 179.5 lm/W	<b>serial documentation</b> <b>18.01.2024</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 294 cd/klm**

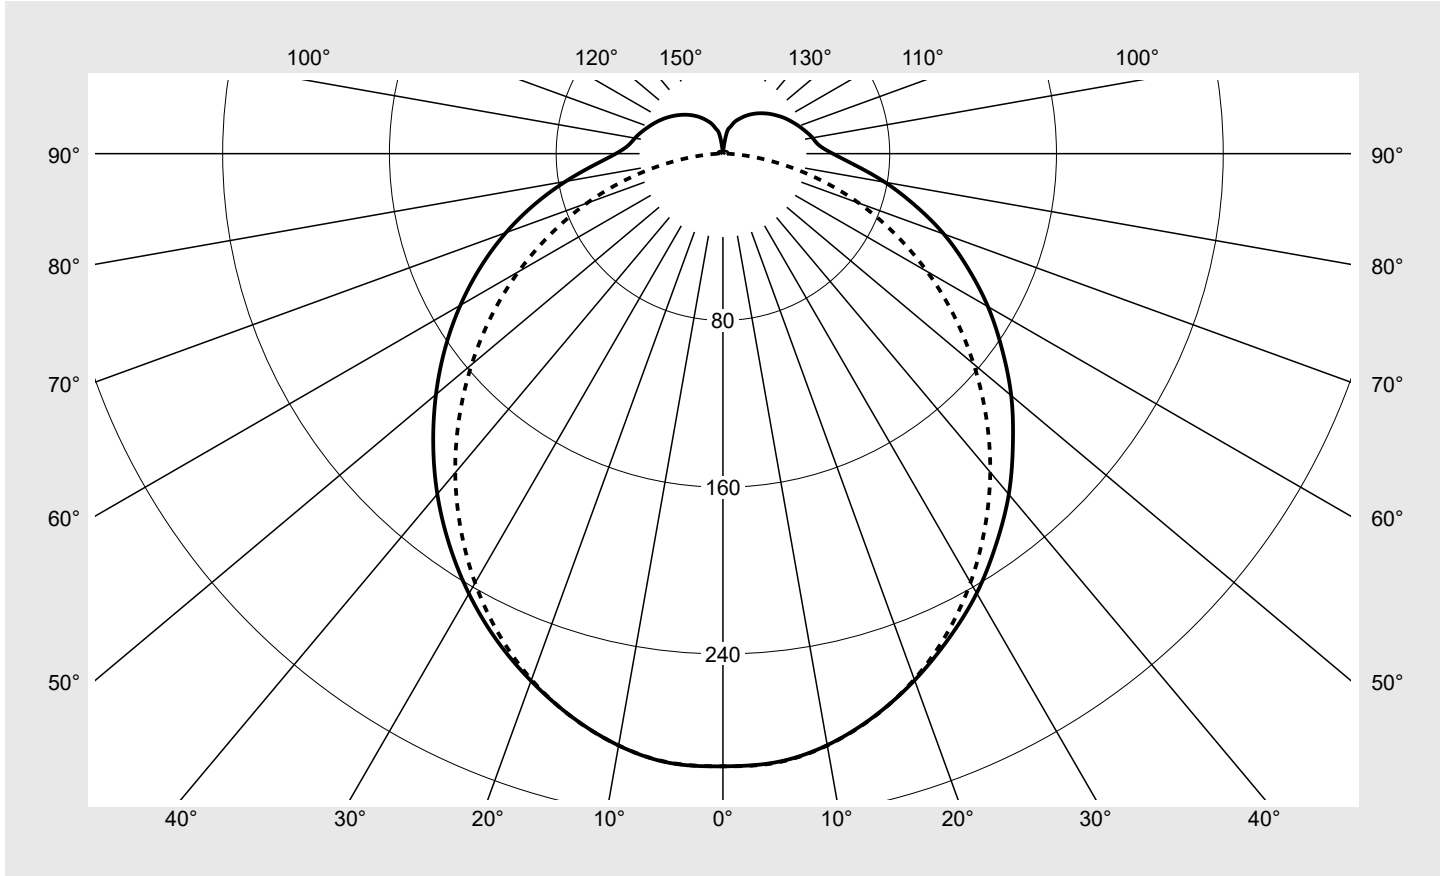

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	87.4%
$\phi_o$	12.6%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL1DDN46XG</b> <b>EAN: 4058352049792</b>	<b>LP number</b> <b>59520_132</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
$\gamma$	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL1DDN46XG</b> <b>EAN: 4058352049792</b>	<b>LP number</b> <b>59520_132</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL1DDN46XG</b> <b>EAN: 4058352049792</b>	<b>LP number</b> 59520_132
---------------------------------------	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	23.0	24.1	24.7
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7
4H	2H	20.8	22.2	21.4	22.7	23.2	20.5	21.8	21.1	22.3	22.9
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.6
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7
8H	4H	24.2	25.0	24.8	25.7	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.4	26.1	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0
	8H	25.9	26.6	26.6	27.2	27.9	24.3	24.9	24.9	25.5	26.3
	12H	26.5	27.0	27.2	27.7	28.5	24.4	24.9	25.1	25.6	26.4
12H	4H	24.2	24.9	24.8	25.6	26.3	23.4	24.1	24.0	24.7	25.4
	6H	25.4	26.0	26.1	26.7	27.4	24.1	24.7	24.8	25.4	26.1
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1500</b>	<b>H(C0) = 25</b>	<b>H(C180) = 25</b>							
			<b>B = 76</b>	<b>H(C90) = 25</b>	<b>H(C270) = 25</b>							
<b>C-planes</b>	<b>0°</b>	<b>30°</b>	<b>60°</b>	<b>90°</b>	<b>120°</b>	<b>150°</b>	<b>180°</b>	<b>210°</b>	<b>240°</b>	<b>270°</b>	<b>300°</b>	<b>330°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>											
45°	11605.7	11592.5	12026.7	13771.0	12075.2	11602.3	11596.2	11587.5	12037.5	13796.0	12080.6	11617.0
50°	11184.5	11144.0	11479.4	13278.9	11496.7	11112.9	11134.4	11118.1	11473.6	13306.3	11514.0	11138.8
55°	10746.8	10708.3	10909.3	12766.3	10915.5	10636.6	10698.8	10658.7	10896.8	12789.2	10946.7	10691.8
60°	10369.8	10277.3	10335.5	12189.1	10321.8	10170.0	10272.6	10199.8	10294.3	12206.6	10369.8	10241.5
65°	9965.2	9846.8	9762.9	11523.8	9724.5	9703.2	9852.9	9748.8	9693.8	11534.1	9786.0	9807.6
70°	9602.6	9368.4	9122.0	10762.2	9060.3	9179.2	9430.2	9230.1	9016.3	10762.2	9139.6	9295.6
75°	9154.0	8825.5	8328.3	9677.4	8231.6	8626.5	8974.9	8659.7	8185.7	9662.7	8346.0	8784.0
80°	8792.2	8324.8	7448.2	8155.9	7264.6	8120.9	8530.4	8111.2	7257.0	8125.0	7389.1	8286.0
85°	8507.1	7989.9	6555.3	6021.6	6392.8	7687.9	8267.9	7756.6	6340.3	5952.7	6538.4	7870.2

**Photometric test report**


**Family**  
Licross® 11 Recessed

**Order number: 51TL1DDN46XG**  
**EAN: 4058352049792**

**LP number**  
**59520\_132**

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

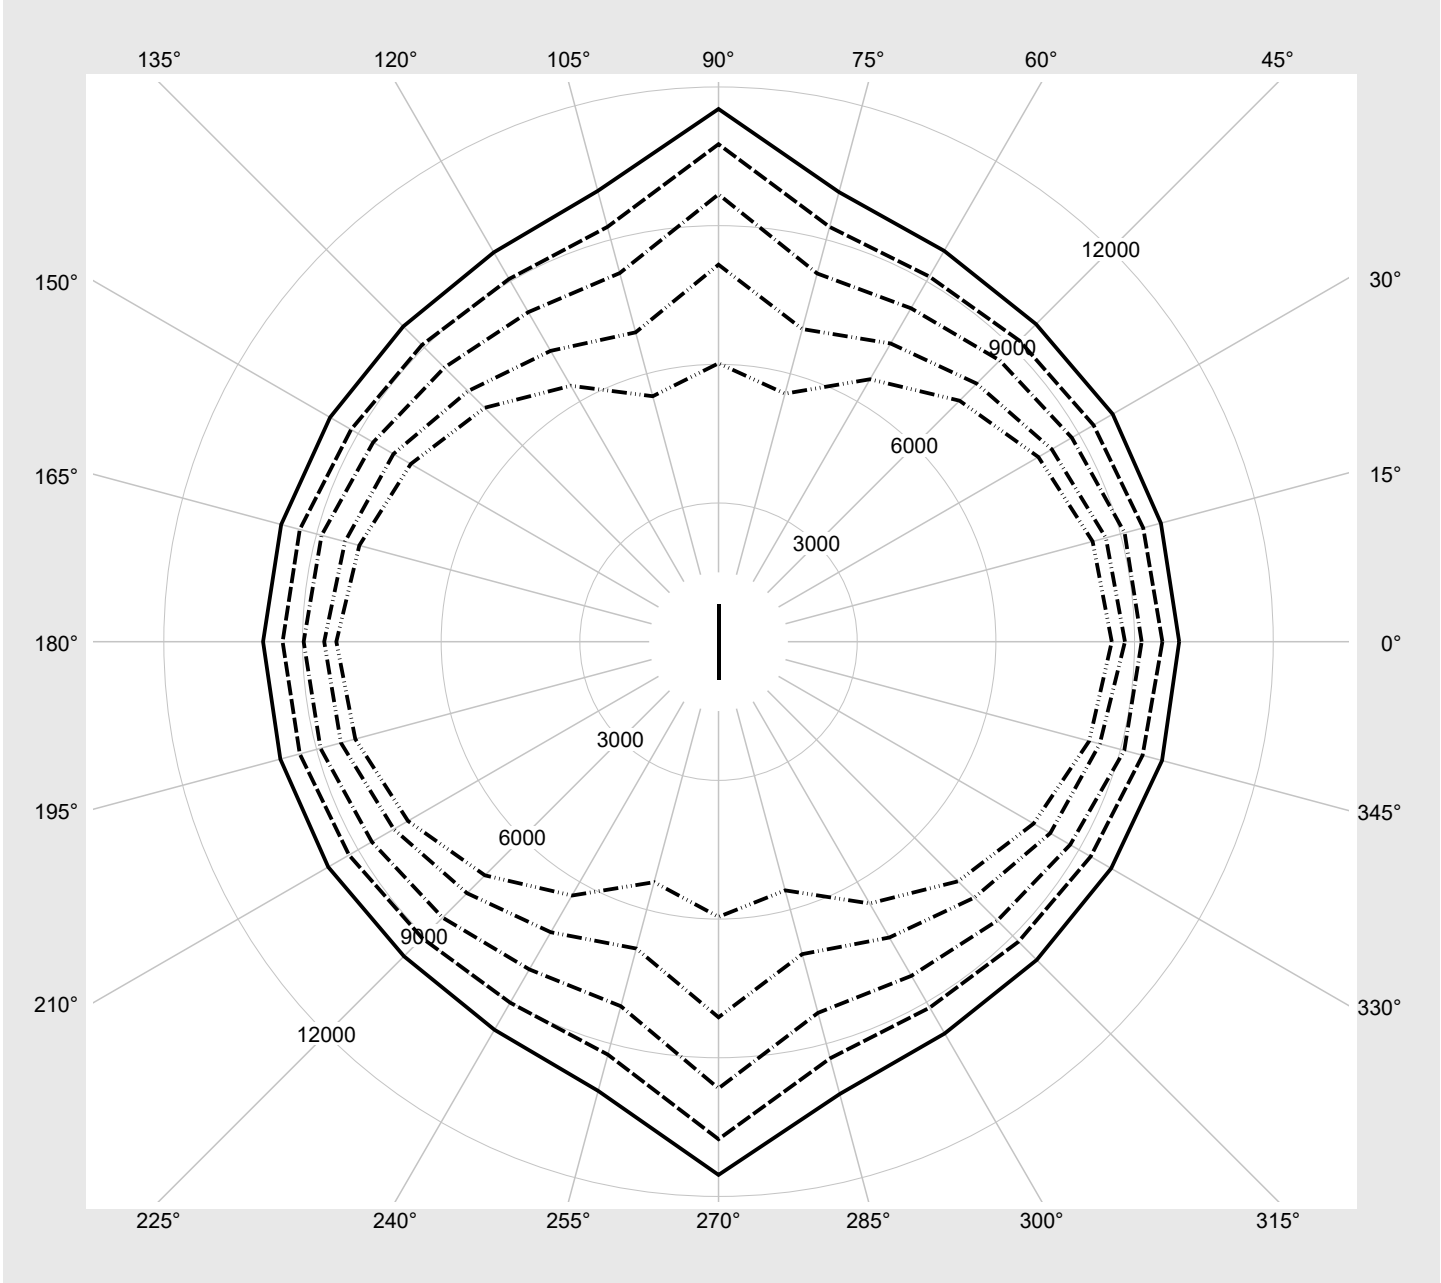

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL1DDN46XG</b> <b>EAN: 4058352049792</b>	<b>LP number</b> 59520_132
---------------------------------------	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6320	35.2
95	241	252	6014	33.4
90	227	250	5679	31.5
85	214	248	5369	29.7
80	201	245	5057	28.1
75	188	243	4744	26.5
70	175	240	4428	24.8
65	162	238	4109	23.1
60	149	234	3790	21.3
55	136	231	3469	19.7
50	124	228	3171	18.0
45	111	224	2846	16.2
40	98	219	2518	14.4
35	86	214	2214	12.7
30	73	208	1884	10.9
25	61	202	1578	9.3
20	49	194	1270	7.7
15	37	183	960	6.1
10	24	168	620	4.2
9	21	163	542	3.7