
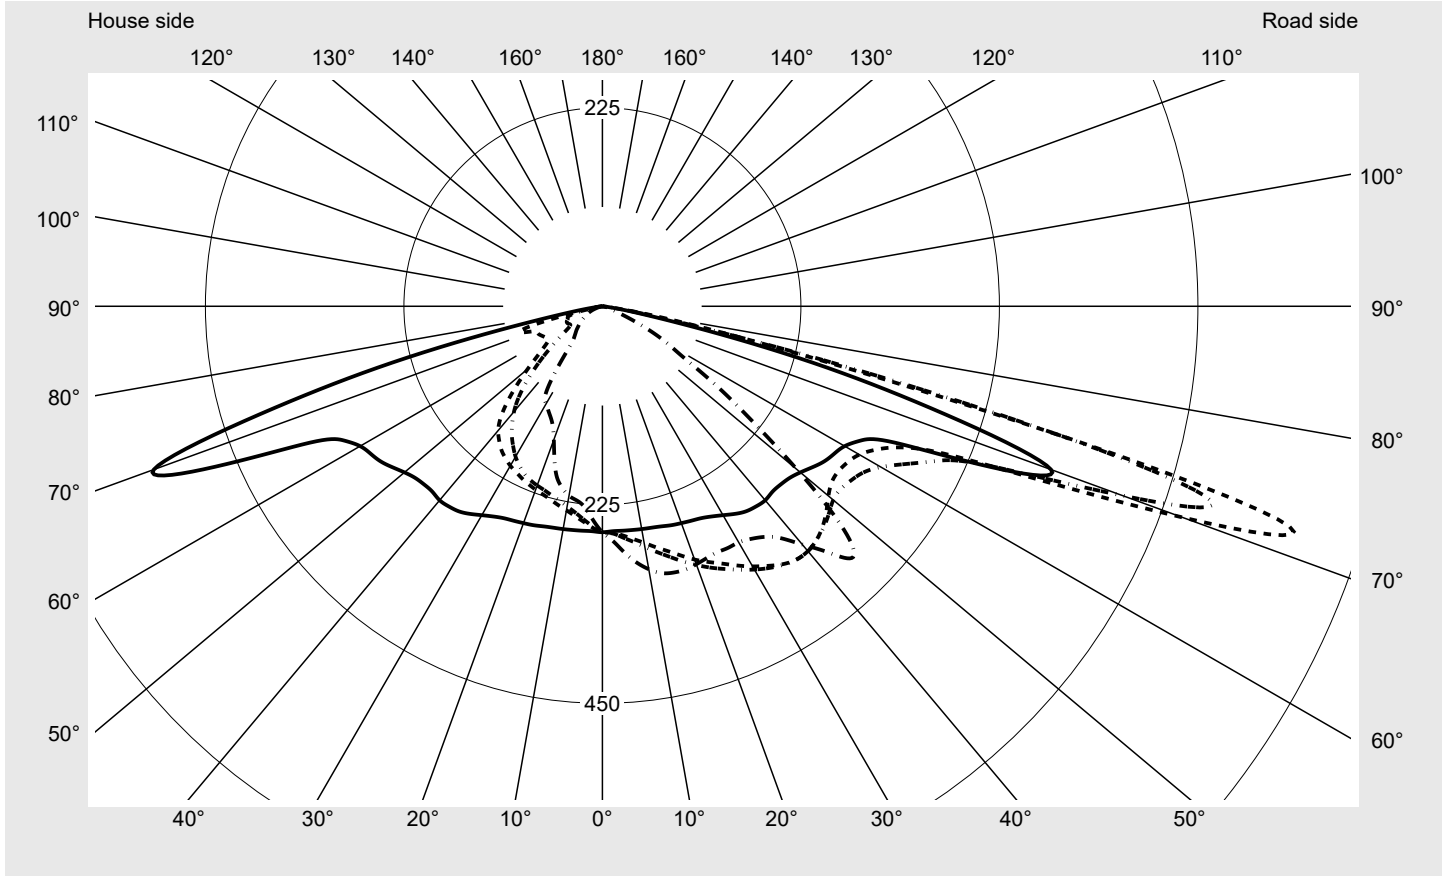


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
	Version post-top or side-entry mounting, Smart Interface up Optic asymmetric, extremely wide distribution (P0.8a G), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 18710 lm Power consumption = 136.6 W Luminous efficacy = 137 lm/W	serial documentation 18.01.2024



Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 802 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	699.8
Imax 80°	48.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°**

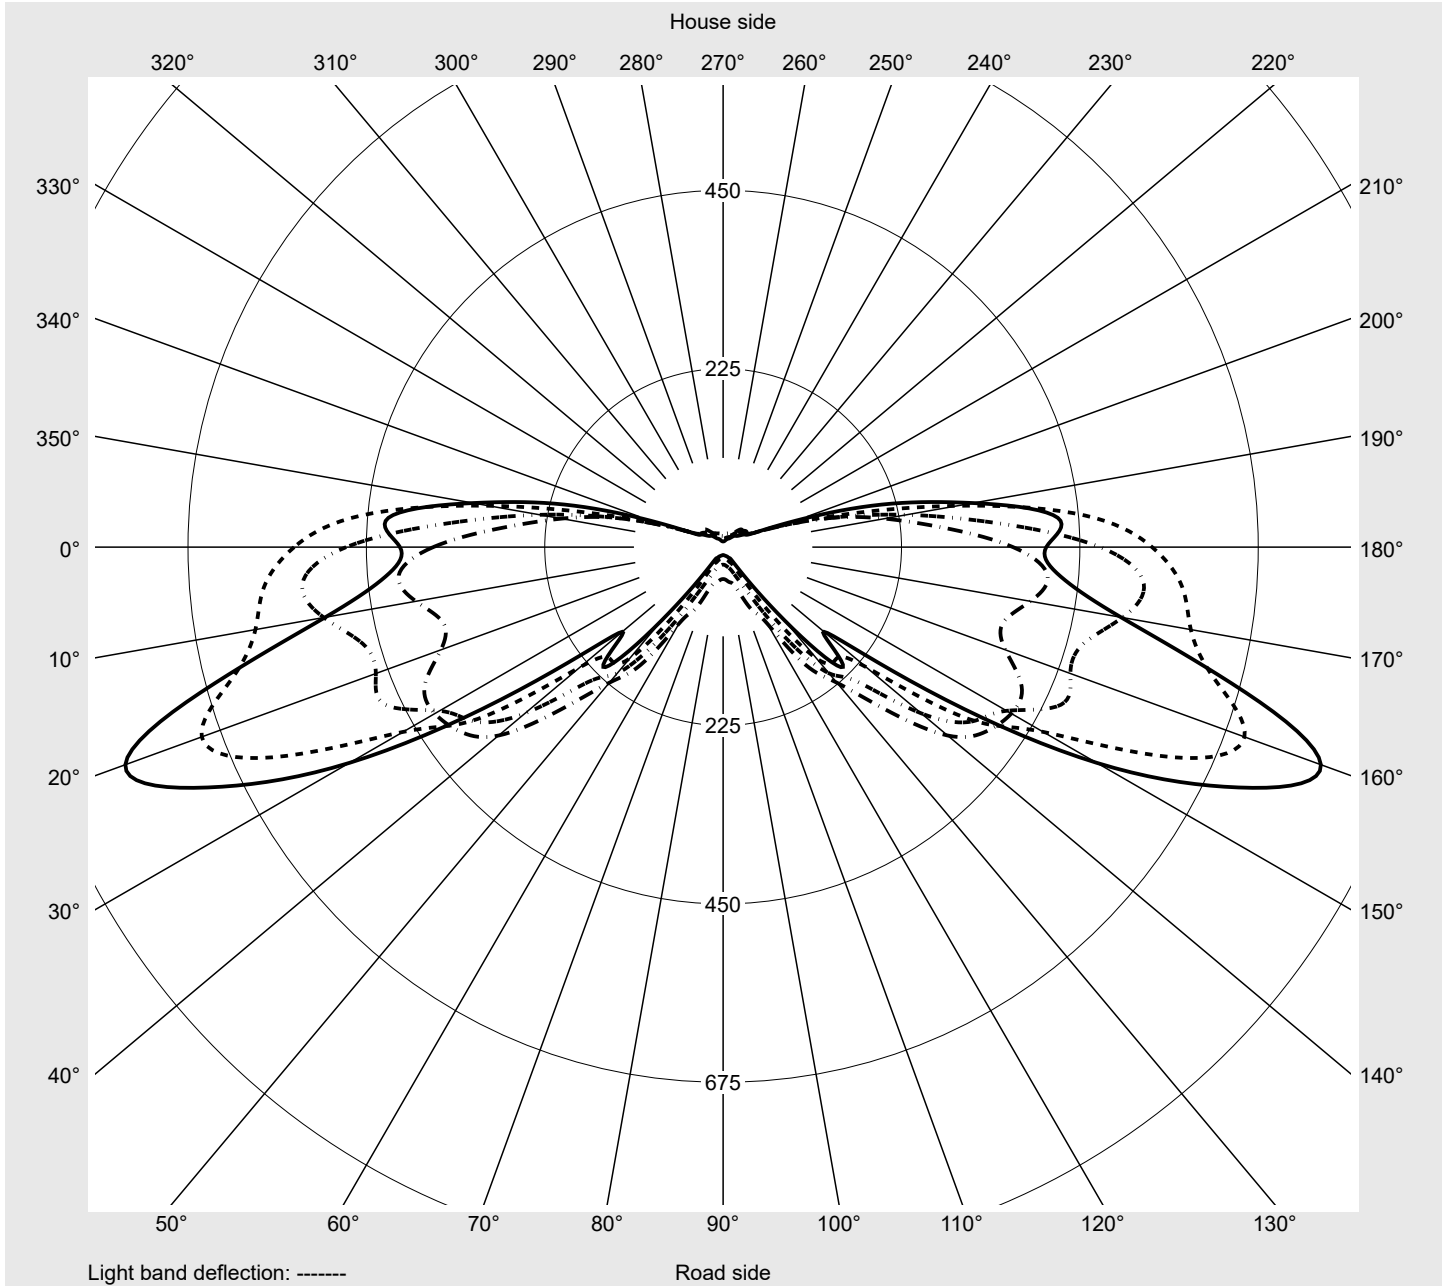

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
---	--	-------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	255.3	255.8	256.2	256.7	257.1	257.7	258.2	259.1	260.2	260.9	261.9	262.7	263.5
5,0°	255.4	256.0	256.7	258.2	260.6	263.0	265.0	267.2	269.2	270.8	272.6	274.1	275.5
7,5°	255.8	256.5	258.8	262.3	266.0	269.3	272.5	275.5	278.7	281.2	283.2	285.3	287.1
10,0°	256.4	258.2	262.5	267.4	272.2	277.0	280.9	284.5	288.5	291.7	293.9	296.0	297.8
12,5°	257.1	260.9	266.8	273.2	279.7	285.3	290.3	294.6	298.1	301.2	303.7	305.6	306.7
15,0°	258.3	264.2	271.8	280.0	287.4	293.9	299.5	303.5	306.9	309.1	310.8	311.9	312.4
17,5°	260.2	268.3	277.9	287.3	296.2	303.2	308.2	312.5	314.9	316.4	317.2	317.3	316.9
20,0°	261.6	272.9	284.4	295.3	305.5	312.0	317.0	319.8	321.2	321.9	321.7	320.7	318.8
22,5°	263.1	277.0	290.3	303.3	313.7	320.7	324.6	326.8	327.1	326.4	324.8	322.4	319.7
25,0°	265.0	281.9	297.1	311.8	321.9	328.6	332.3	333.7	333.0	330.6	327.4	324.0	320.7
27,5°	268.6	288.3	306.1	321.3	331.3	336.7	339.1	339.5	337.5	333.9	329.6	324.8	321.6
30,0°	273.4	296.2	316.3	331.6	340.5	344.6	345.4	344.5	341.6	337.2	332.0	327.5	323.8
32,5°	279.0	304.5	326.5	341.2	348.9	351.8	351.2	348.6	344.6	339.9	335.3	331.3	328.2
35,0°	283.7	312.2	336.3	351.1	356.8	357.7	355.9	351.8	347.5	343.8	340.9	338.8	336.1
37,5°	286.0	316.7	341.7	356.3	361.7	361.7	358.7	354.3	350.4	348.5	348.6	348.6	346.9
40,0°	287.0	320.2	345.2	358.6	362.5	362.3	359.1	356.2	355.0	355.8	360.4	364.2	362.1
42,5°	285.2	320.5	345.2	356.6	359.3	359.4	357.7	358.0	360.8	366.6	375.3	381.6	382.2
45,0°	285.7	320.8	343.5	351.3	353.0	354.6	355.8	360.2	369.0	380.9	393.4	402.6	408.6
47,5°	288.0	322.1	341.1	344.6	344.3	348.1	356.0	368.0	382.4	400.3	415.5	427.5	433.5
50,0°	292.9	325.0	338.7	336.5	334.5	341.6	358.1	378.1	396.9	417.8	434.4	441.6	427.3
52,5°	299.8	329.7	337.4	330.5	327.7	340.5	363.0	389.7	411.7	431.2	433.9	412.3	374.4
55,0°	306.7	334.2	337.1	326.9	326.4	344.1	371.1	403.3	424.1	433.0	402.1	355.6	306.8
57,5°	311.3	338.1	337.2	325.8	329.4	350.7	382.2	417.7	428.2	420.6	361.9	294.3	250.8
60,0°	317.1	344.9	339.9	328.5	336.3	364.5	398.6	425.7	422.2	393.2	312.0	249.9	207.3
62,5°	329.8	361.2	352.4	337.4	351.3	387.3	415.1	423.8	402.5	347.1	258.8	209.0	152.8
65,0°	365.7	410.8	393.4	366.1	378.8	415.5	419.8	405.2	369.7	289.8	223.3	181.2	111.5
67,5°	475.5	532.7	511.4	470.6	466.2	470.3	412.9	383.3	326.1	240.4	207.7	145.1	77.1
70,0°	541.1	581.5	599.1	641.5	699.8	627.4	466.2	377.8	235.4	200.6	183.3	93.1	32.6
72,5°	407.6	427.6	509.6	664.1	802.4	717.3	544.2	314.9	166.3	213.7	120.9	30.9	16.2
75,0°	246.2	264.5	277.6	328.6	402.1	429.8	318.1	215.1	231.4	176.6	43.4	14.0	11.6
77,5°	93.3	138.1	128.7	130.6	145.2	140.9	88.4	120.4	200.4	113.6	14.2	10.2	8.3
80,0°	29.0	40.6	45.8	48.4	48.9	39.2	14.5	19.3	31.3	15.5	8.5	6.2	5.1
82,5°	7.0	8.7	10.9	12.4	6.5	13.3	5.2	3.5	4.0	2.8	2.9	2.7	2.5
85,0°	2.5	2.4	2.2	2.0	2.0	2.0	1.6	1.5	1.3	1.3	1.3	1.0	1.0
87,5°	1.3	1.3	1.3	1.1	1.0	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1
2,5°	264.1	264.7	265.0	265.5	265.8	266.0	254.1	252.7	252.0	251.3	249.9	248.7	247.5
5,0°	276.5	277.4	278.2	279.0	279.4	279.6	252.9	250.3	247.5	245.1	242.6	240.3	238.0
7,5°	288.6	289.8	290.7	291.5	292.1	292.5	252.2	247.5	243.3	239.7	235.8	232.7	230.1
10,0°	299.2	300.1	301.2	302.0	302.6	302.6	251.6	245.2	239.6	234.8	230.3	226.7	224.1
12,5°	307.5	308.1	308.7	309.4	309.6	309.8	251.8	243.7	236.5	230.9	225.4	222.3	220.0
15,0°	312.3	312.0	312.2	312.5	312.5	312.5	252.3	242.2	234.1	226.9	221.9	218.5	216.3
17,5°	315.9	314.3	313.4	313.1	312.8	312.9	252.5	240.7	231.1	223.7	218.6	215.3	212.6
20,0°	316.9	314.9	313.3	311.8	311.3	311.2	252.9	239.7	228.7	221.2	216.2	212.2	207.6
22,5°	317.2	314.1	311.8	310.2	309.1	308.9	252.5	237.9	226.0	218.4	213.4	208.2	200.7
25,0°	317.2	314.4	311.8	309.4	307.8	307.7	252.2	235.8	223.1	215.4	209.5	201.4	194.1
27,5°	318.6	315.5	312.6	310.2	308.7	308.7	252.3	234.2	220.7	211.9	203.6	193.1	183.9
30,0°	320.9	318.1	314.3	311.1	309.3	308.9	254.6	234.1	218.7	208.7	196.9	183.9	171.6
32,5°	325.2	322.1	318.3	315.3	313.4	312.7	256.0	233.4	216.4	204.3	188.2	171.8	154.5
35,0°	333.0	329.2	325.4	322.1	319.9	319.2	258.1	233.4	214.1	199.3	179.0	157.4	134.1
37,5°	343.1	339.8	336.7	333.6	331.9	331.1	256.3	230.9	210.2	192.2	168.0	141.7	114.8
40,0°	360.0	358.4	357.7	354.8	353.2	352.5	254.2	226.4	204.5	183.7	155.9	124.9	99.4
42,5°	383.8	385.0	385.3	381.7	379.0	378.1	249.1	218.4	193.8	170.3	140.9	110.7	86.3
45,0°	412.5	413.9	412.7	407.8	403.4	402.0	244.4	208.8	179.6	151.5	122.7	97.5	74.3
47,5°	431.9	419.1	401.0	382.9	370.4	366.1	243.2	201.6	166.1	130.5	103.5	85.3	64.9
50,0°	396.5	359.5	329.9	307.1	292.2	288.0	247.0	199.5	154.8	110.5	84.9	72.4	57.4
52,5°	326.1	280.0	250.8	231.5	218.8	215.0	251.4	198.7	147.9	93.2	68.1	60.2	52.1
55,0°	257.8	216.1	191.0	175.0	163.6	160.6	257.4	200.1	143.2	80.9	54.9	50.5	49.7
57,5°	209.3	172.2	145.8	127.8	116.2	112.4	260.4	199.2	139.4	73.0	45.5	44.0	46.7
60,0°	162.7	129.1	107.8	95.3	88.6	87.0	260.2	198.1	139.8	72.6	42.0	38.5	42.9
62,5°	121.1	93.2	79.2	72.8	66.6	64.1	261.6	198.3	141.4	74.7	43.1	36.4	39.2
65,0°	88.5	62.5	47.9	44.8	41.5	40.3	279.6	207.0	143.0	77.4	44.2	35.7	35.2
67,5°	45.4	31.8	26.8	24.3	22.6	22.2	347.1	234.7	143.9	79.3	43.6	33.8	31.5
70,0°	21.6	17.7	16.0	15.3	14.5	14.2	458.1	300.3	160.0	82.8	41.8	33.2	28.4
72,5°	13.7	12.2	11.3	10.7	10.2	10.0	423.8	320.2	207.5	97.4	41.2	31.7	25.8
75,0°	10.1	9.0	8.1	7.7	7.2	7.2	209.9	193.5	168.4	77.5	35.6	28.6	23.1
77,5°	7.0	6.1	5.4	5.1	4.7	4.6	67.8	68.8	55.1	23.2	21.9	22.0	18.9
80,0°	4.1	3.7	3.2	2.9	2.8	2.8	19.2	18.9	14.7	9.8	10.9	12.8	12.6
82,5°	2.3	2.1	1.9	1.7	1.6	1.7	5.4	5.0	4.9	5.3	5.5	6.3	6.2
85,0°	1.0	1.0	0.9	0.8	0.8	0.8	2.5	2.6	2.7	2.7	2.7	2.5	2.3
87,5°	0.6	0.5	0.4	0.4	0.4	0.4	1.3	1.5	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	256.1	0.4	0.4
2,5°	246.5	245.9	245.1	244.3	243.7	243.5	243.2	242.8	242.7	242.6	242.6	3.0	3.4
5,0°	235.9	234.5	233.1	231.7	230.7	230.0	229.4	228.9	228.8	228.9	228.8	6.1	9.5
7,5°	227.6	226.1	224.9	223.7	222.9	222.6	222.1	222.1	222.1	222.1	222.1	9.1	18.6
10,0°	222.0	220.7	219.9	219.3	218.8	218.6	218.4	218.3	218.2	218.1	218.1	12.2	30.8
12,5°	218.2	217.1	216.1	215.2	214.2	213.1	211.9	211.4	211.0	210.6	210.7	15.3	46.1
15,0°	214.8	212.9	210.8	208.0	205.7	204.0	202.3	201.1	200.4	200.0	199.9	18.3	64.4
17,5°	209.5	205.5	202.2	199.0	195.7	192.5	188.9	185.6	183.2	181.5	180.9	21.2	85.6
20,0°	202.1	198.0	193.3	188.5	182.0	175.6	170.1	166.1	163.3	161.6	161.0	23.8	109.5
22,5°	194.9	188.8	182.1	173.1	165.0	158.5	153.6	150.5	148.6	147.4	147.0	26.4	135.8
25,0°	186.5	177.8	167.1	157.6	150.1	145.3	142.3	140.5	139.5	138.9	138.8	28.9	164.7
27,5°	174.2	161.1	149.5	141.3	136.2	133.3	132.5	132.7	132.9	132.8	132.9	31.3	196.0
30,0°	156.2	142.0	131.9	125.7	123.8	123.9	124.9	126.0	126.9	127.3	127.5	33.6	229.6
32,5°	135.4	121.4	112.6	109.8	110.7	114.2	118.5	121.7	121.8	121.3	121.0	35.8	265.4
35,0°	114.0	99.7	92.6	93.1	99.5	105.7	107.7	106.6	103.5	100.4	99.0	37.8	303.2
37,5°	94.9	80.9	76.9	81.3	86.7	87.6	84.6	80.5	76.5	73.4	72.1	39.4	342.6
40,0°	79.0	67.7	66.9	70.7	70.9	68.6	66.0	62.0	57.9	55.1	54.0	41.4	383.9
42,5°	67.7	60.7	61.9	61.8	61.0	59.2	55.0	51.3	49.1	47.7	47.2	43.6	427.6
45,0°	60.1	58.1	57.9	56.8	55.7	51.4	47.8	45.6	44.2	43.4	43.1	46.0	473.6
47,5°	56.2	56.3	54.5	54.0	50.0	45.6	43.0	41.3	40.4	39.9	39.7	47.5	521.1
50,0°	54.3	53.5	52.3	49.5	44.0	40.7	38.7	37.2	36.5	36.0	35.9	46.9	568.0
52,5°	53.7	50.6	49.0	44.4	39.0	36.3	34.6	33.7	33.1	32.8	32.8	45.3	613.2
55,0°	52.1	46.9	44.8	38.9	34.5	32.5	31.1	30.3	29.8	29.5	29.6	43.5	656.8
57,5°	46.5	42.6	39.5	33.8	30.7	28.8	27.2	26.5	26.2	25.9	26.0	41.9	698.7
60,0°	41.1	38.6	35.1	29.5	26.9	25.3	24.1	23.7	23.2	23.0	23.0	40.6	739.3
62,5°	36.4	35.1	30.1	25.4	23.4	22.0	21.3	20.8	20.3	20.1	20.1	39.5	778.8
65,0°	32.6	31.7	25.8	21.6	20.4	19.1	18.5	17.8	17.3	17.0	17.0	39.3	818.1
67,5°	28.8	27.9	22.6	18.5	17.3	16.3	15.5	14.9	14.3	14.0	13.9	42.2	860.3
70,0°	25.5	24.4	19.6	15.9	14.8	13.8	12.9	12.0	11.2	10.8	10.7	47.5	907.8
72,5°	21.9	20.1	16.4	13.5	12.2	10.9	9.5	8.3	7.6	7.2	7.2	45.6	953.4
75,0°	18.4	15.9	13.0	10.7	9.3	8.6	6.7	5.6	5.1	4.8	4.8	28.3	981.6
77,5°	14.5	11.7	9.1	7.2	6.3	6.0	4.2	3.4	2.9	2.7	2.7	12.7	994.3
80,0°	10.2	7.7	5.5	4.4	3.9	3.5	2.5	1.8	1.4	1.1	1.0	3.8	998.2
82,5°	5.4	4.1	3.0	2.3	1.8	1.6	1.3	1.0	0.8	0.6	0.4	1.2	999.3
85,0°	2.1	1.8	1.5	1.2	0.9	0.8	0.6	0.6	0.4	0.4	0.3	0.4	999.8
87,5°	1.1	1.0	0.9	0.8	0.6	0.6	0.5	0.4	0.4	0.3	0.3	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18710	136.6	143.6	140.1
95	241	252	17752	128.0	134.4	131.2
90	229	250	16868	120.3	126.2	123.2
85	216	248	15911	112.0	117.6	114.8
80	203	246	14953	104.0	109.1	106.6
75	190	243	13996	96.3	101.0	98.6
70	178	241	13112	89.3	93.7	91.5
65	165	238	12154	82.0	86.0	84.0
60	152	235	11197	74.8	78.5	76.6
55	140	232	10313	68.3	71.6	69.9
50	127	229	9355	61.4	64.3	62.8
45	114	225	8397	54.6	57.3	56.0
40	102	221	7513	48.5	50.8	49.6
35	89	216	6556	42.0	44.0	43.0
30	76	210	5598	35.7	37.3	36.5
25	63	203	4641	29.6	30.8	30.2
20	51	195	3757	23.9	25.0	24.4
15	38	184	2799	18.1	18.9	18.5
10	25	169	1842	12.3	12.8	12.6

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18720	133.6	138.1	135.8
95	241	252	17761	125.4	129.6	127.5
90	229	250	16877	118.0	122.0	120.0
85	216	248	15919	110.2	113.9	112.0
80	203	246	14961	102.6	106.0	104.3
75	191	244	14077	95.7	98.9	97.3
70	178	241	13118	88.5	91.3	89.9
65	165	238	12160	81.3	83.9	82.6
60	152	235	11202	74.3	76.7	75.5
55	140	232	10318	67.9	70.1	69.0
50	127	229	9360	61.2	63.1	62.2
45	114	225	8402	54.5	56.2	55.4
40	102	221	7517	48.5	50.1	49.3
35	89	216	6559	42.1	43.4	42.8
30	76	210	5601	35.7	36.9	36.3
25	64	204	4717	30.0	31.0	30.5
20	51	195	3759	24.0	24.8	24.4
15	38	184	2801	18.2	18.7	18.4
10	26	171	1916	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18720	134.8	140.4	137.6
95	241	252	17761	126.4	131.6	129.0
90	229	250	16877	118.8	123.7	121.2
85	216	248	15919	110.9	115.4	113.2
80	203	246	14961	103.1	107.3	105.2
75	191	244	14076	96.2	100.1	98.2
70	178	241	13118	88.8	92.3	90.6
65	165	238	12160	81.5	84.8	83.2
60	152	235	11202	74.5	77.4	76.0
55	140	232	10318	68.0	70.7	69.4
50	127	229	9360	61.2	63.6	62.4
45	114	225	8402	54.5	56.7	55.6
40	102	221	7517	48.5	50.4	49.4
35	89	216	6559	41.9	43.6	42.8
30	76	210	5601	35.7	37.0	36.4
25	64	204	4717	30.0	31.1	30.6
20	51	195	3759	24.0	24.9	24.4
15	38	184	2801	18.1	18.7	18.4
10	26	171	1916	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3R31V08NB EAN: 4069025150707	LP number 59538_24
--	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	18710.0	136.6
5.0	18720.0	133.6
15.0	18720.0	134.8