




Photometric test report

Family Lunis 21	Order number: 51DB17MF91C EAN: 4069025013132	LP number 59583_3
	Version	recessed luminaire, Combined lens and reflector optics, reflector, black, rotationally symmetrical wide distribution, adjustable color temperature: 3000K 4000K 6500K, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG Multilumen
	Setting	factory setting: DIP-Step=2, colour temperature 4000K
Rated values	Net luminous flux = 2120 lm Power consumption = 13.6 W Luminous efficacy = 155.9 lm/W	serial documentation 15.03.2024
		

Luminous intensity in cd/klm C180-0 **Imax: 1108 cd/klm**

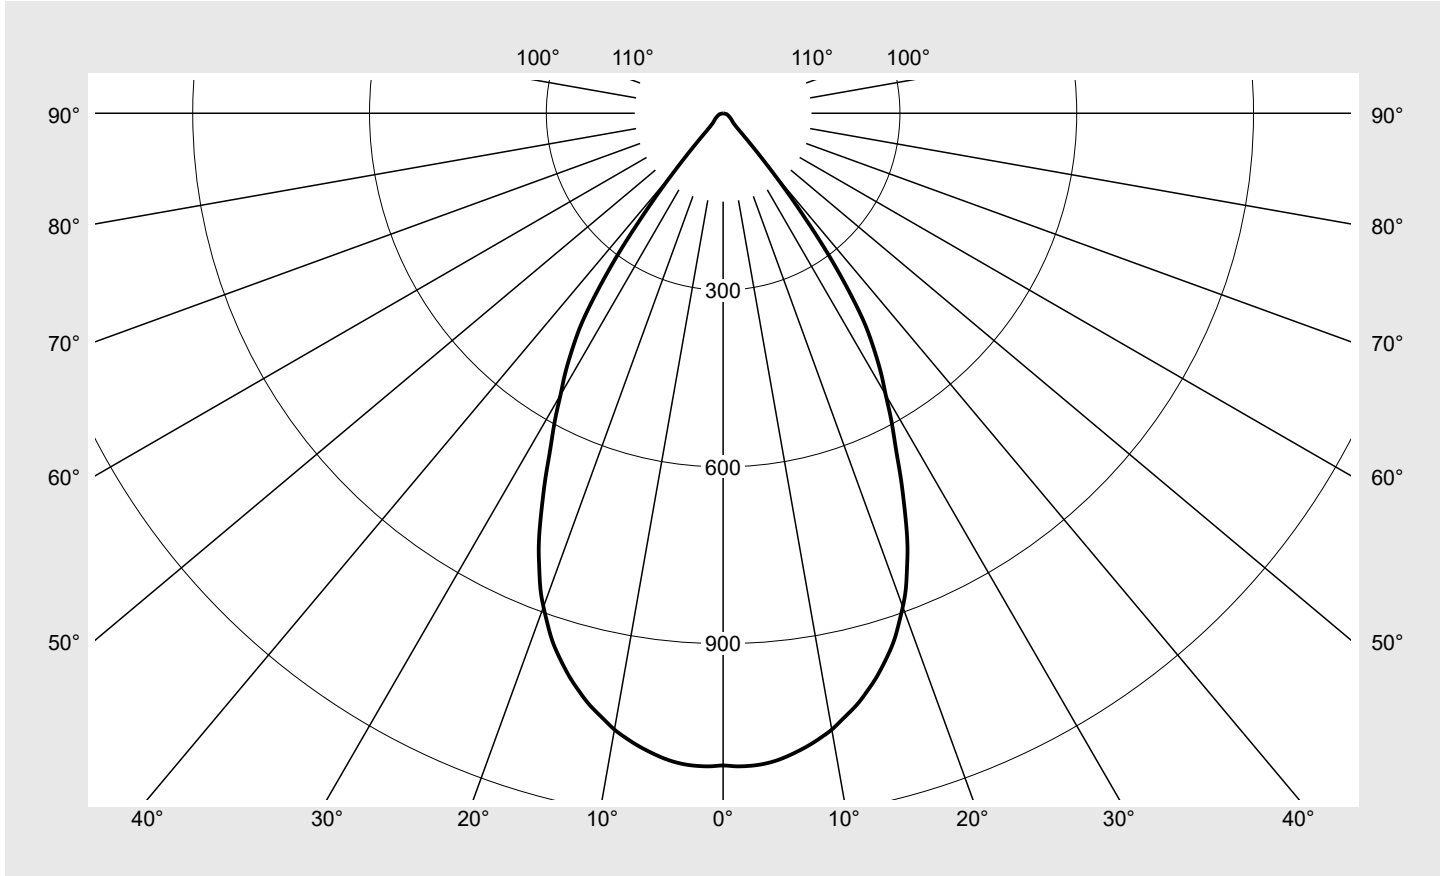

Classifications	
DIN 5040	A 7 0
CIE	N1=95 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Lunis 21	Order number: 51DB17MF91C EAN: 4069025013132	LP number 59583_3
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1106.7	0.3	0.3
1°	1108.2	2.1	2.4
2°	1108.4	4.2	6.6
3°	1107.5	6.4	13.0
4°	1104.9	8.5	21.4
5°	1100.5	10.5	32.0
6°	1094.6	12.5	44.5
7°	1087.7	14.5	59.0
8°	1080.1	16.5	75.5
9°	1071.4	18.4	93.9
10°	1061.9	20.2	114.1
11°	1049.8	22.0	136.1
12°	1037.9	23.7	159.8
13°	1025.4	25.3	185.1
14°	1010.5	26.8	211.9
15°	995.2	28.2	240.1
16°	977.9	29.6	269.7
17°	959.5	30.8	300.4
18°	939.6	31.8	332.3
19°	915.7	32.7	365.0
20°	891.3	33.4	398.4
21°	864.9	34.0	432.4
22°	832.9	34.2	466.6
23°	800.7	34.3	500.9
24°	763.6	34.1	535.0
25°	724.9	33.6	568.6
26°	687.3	33.0	601.6
27°	649.0	32.3	633.9
28°	616.2	31.7	665.6
29°	584.7	31.1	696.7
30°	551.8	30.3	727.0
31°	524.1	29.6	756.6
32°	494.0	28.7	785.3
33°	462.4	27.6	812.9
34°	428.1	26.2	839.1
35°	382.9	24.1	863.2
36°	333.6	21.5	884.7
37°	282.0	18.6	903.3
38°	226.4	15.3	918.6
39°	177.2	12.2	930.9
40°	130.6	9.2	940.1
41°	91.9	6.6	946.7
42°	63.0	4.6	951.3
43°	43.4	3.2	954.5
44°	33.3	2.5	957.1
45°	28.7	2.2	959.3
46°	25.4	2.0	961.3

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	23.4	1.9	963.2
48°	22.1	1.8	965.0
49°	20.8	1.7	966.7
50°	20.0	1.7	968.4
51°	19.1	1.6	970.0
52°	18.2	1.6	971.6
53°	17.5	1.5	973.1
54°	16.8	1.5	974.6
55°	15.9	1.4	976.0
56°	15.2	1.4	977.4
57°	14.5	1.3	978.7
58°	13.8	1.3	980.0
59°	13.1	1.2	981.3
60°	12.6	1.2	982.5
61°	11.9	1.1	983.6
62°	11.4	1.1	984.7
63°	10.9	1.1	985.8
64°	10.3	1.0	986.8
65°	9.9	1.0	987.8
66°	9.5	1.0	988.7
67°	9.0	0.9	989.6
68°	8.7	0.9	990.5
69°	8.3	0.8	991.4
70°	7.9	0.8	992.2
71°	7.5	0.8	993.0
72°	7.2	0.8	993.7
73°	6.8	0.7	994.4
74°	6.6	0.7	995.1
75°	6.2	0.7	995.8
76°	5.9	0.6	996.4
77°	5.5	0.6	997.0
78°	5.1	0.5	997.5
79°	4.6	0.5	998.0
80°	4.0	0.4	998.5
81°	3.3	0.4	998.8
82°	2.7	0.3	999.1
83°	2.2	0.2	999.3
84°	1.7	0.2	999.5
85°	1.4	0.2	999.7
86°	1.1	0.1	999.8
87°	0.9	0.1	999.9
88°	0.6	0.1	1000.0
89°	0.3	0.0	1000.0
90°	0.0	0.0	1000.0

Photometric test report

Family Lunis 21	Order number: 51DB17MF91C EAN: 4069025013132	LP number 59583_3
---------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.0	17.2	16.4	17.5	17.8	16.0	17.2	16.4	17.5	17.8
	3H	16.0	17.1	16.4	17.4	17.8	16.0	17.1	16.4	17.4	17.8
	4H	16.1	17.0	16.5	17.4	17.7	16.1	17.0	16.5	17.4	17.7
	6H	16.1	17.0	16.5	17.3	17.7	16.1	17.0	16.5	17.3	17.7
	8H	16.2	16.9	16.7	17.3	17.7	16.2	16.9	16.7	17.3	17.7
	12H	16.2	16.8	16.6	17.2	17.7	16.2	16.8	16.6	17.2	17.7
4H	2H	15.9	16.8	16.3	17.2	17.5	15.9	16.8	16.3	17.2	17.5
	3H	15.9	16.7	16.4	17.1	17.5	15.9	16.7	16.4	17.1	17.5
	4H	16.0	16.7	16.4	17.1	17.5	16.0	16.7	16.4	17.1	17.5
	6H	16.1	16.7	16.6	17.1	17.6	16.1	16.7	16.6	17.1	17.6
	8H	16.1	16.6	16.6	17.1	17.6	16.1	16.6	16.6	17.1	17.6
	12H	16.2	16.6	16.7	17.0	17.5	16.2	16.6	16.7	17.0	17.5
8H	4H	16.0	16.5	16.4	16.9	17.4	16.0	16.5	16.4	16.9	17.4
	6H	16.1	16.5	16.6	17.0	17.5	16.1	16.5	16.6	17.0	17.5
	8H	16.1	16.5	16.6	17.0	17.5	16.1	16.5	16.6	17.0	17.5
	12H	16.2	16.4	16.7	16.9	17.5	16.2	16.4	16.7	16.9	17.5
12H	4H	16.0	16.4	16.5	16.9	17.4	16.0	16.4	16.5	16.9	17.4
	6H	16.1	16.4	16.6	16.9	17.5	16.1	16.4	16.6	16.9	17.5
	8H	16.2	16.4	16.7	16.9	17.5	16.2	16.4	16.7	16.9	17.5


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 182
------------------------	---	--

C-planes	0°
γ	Luminance in cd/m²
45°	3305.2
50°	2533.1
55°	2252.0
60°	2054.4
65°	1907.8
70°	1877.5
75°	1954.3
80°	1876.2
85°	1322.1

Photometric test report

Family Lunis 21	Order number: 51DB17MF91C EAN: 4069025013132	LP number 59583_3
----------------------------------	---	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

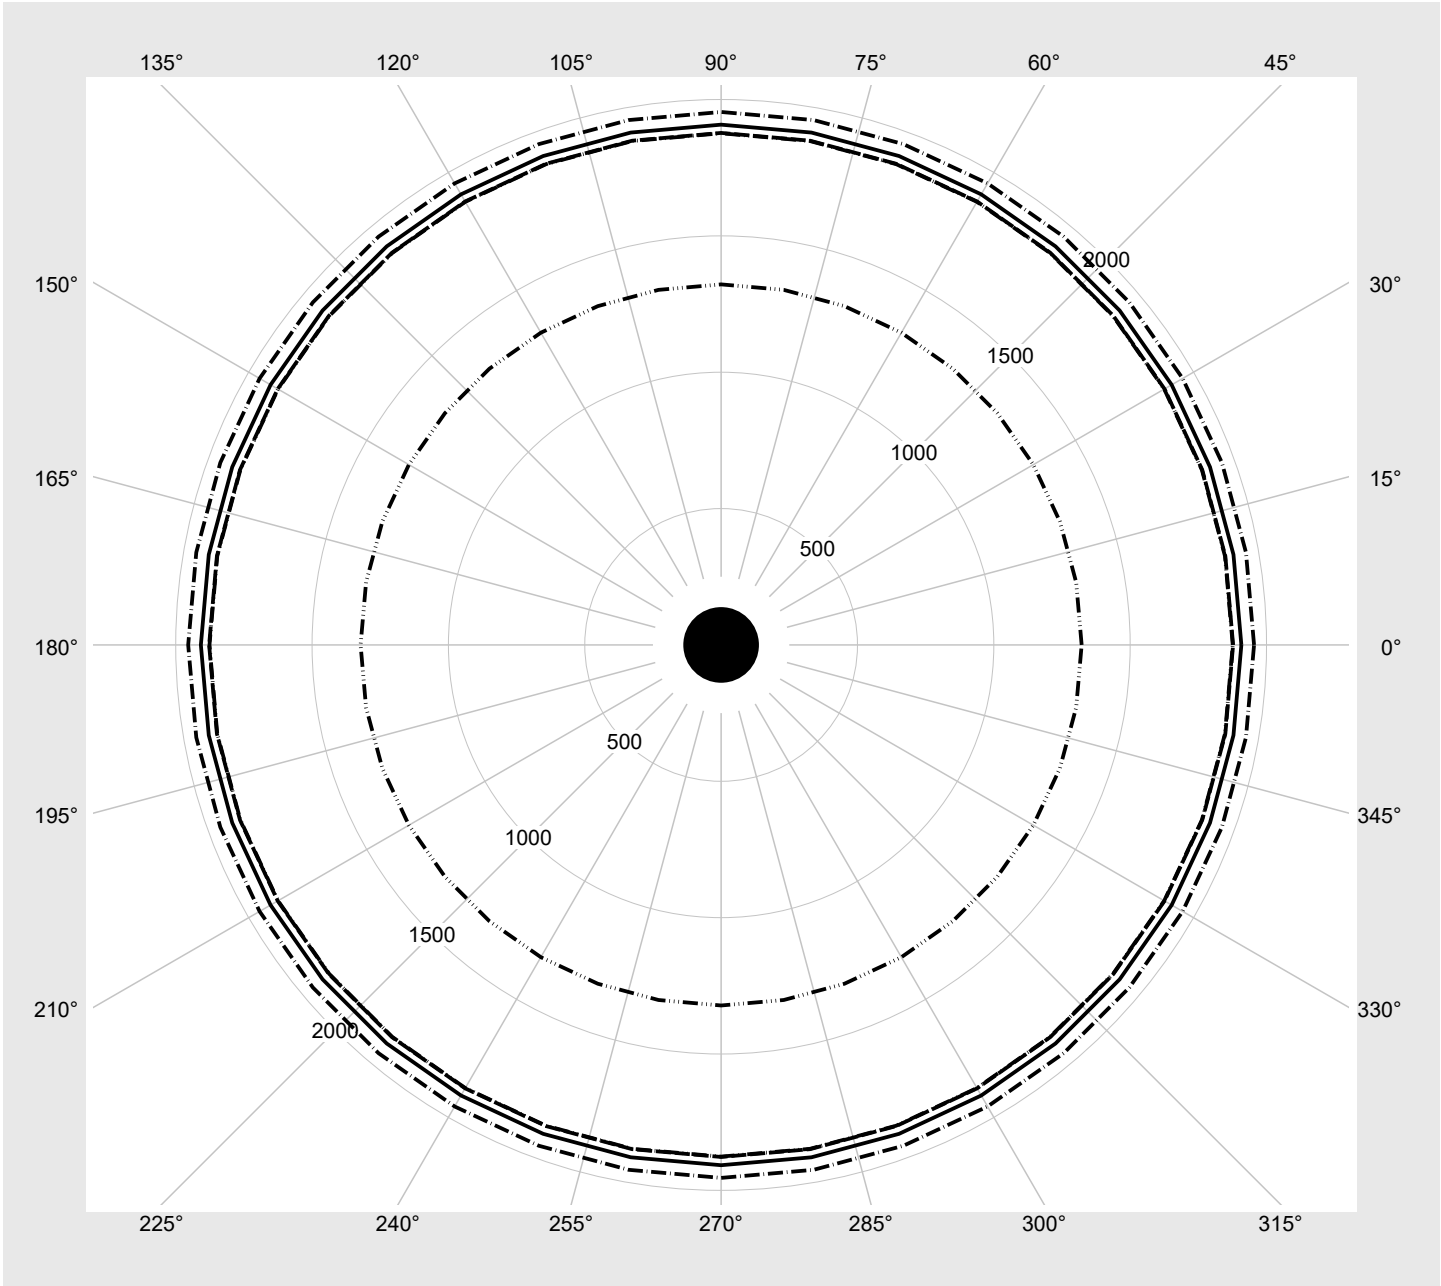

Photometric test report

Family
Lunis 21

Order number: 51DB17MF91C
EAN: 4069025013132

LP number
59583_3

Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
7	OFF	ON	ON	ON	3200	21.7
6	OFF	ON	ON	OFF	3050	20.6
5	OFF	ON	OFF	ON	2890	19.1
4	OFF	ON	OFF	OFF	2720	17.7
3	OFF	OFF	ON	ON	2380	15.3
2	OFF	OFF	ON	OFF	2120	13.6
1	OFF	OFF	OFF	ON	1890	12.1
0	OFF	OFF	OFF	OFF	1630	10.4