


# Photometric test report

<b>Family</b> <b>DL 11 iQ</b> 	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> <b>59425_103</b>
	<b>Version</b> post-top- or mounting to wall arm, shielding on building side, Smart Interface up <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 4770 lm Power consumption = 33.5 W Luminous efficacy = 142.4 lm/W	<b>serial documentation</b> <b>18.03.2024</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 729 cd/klm**

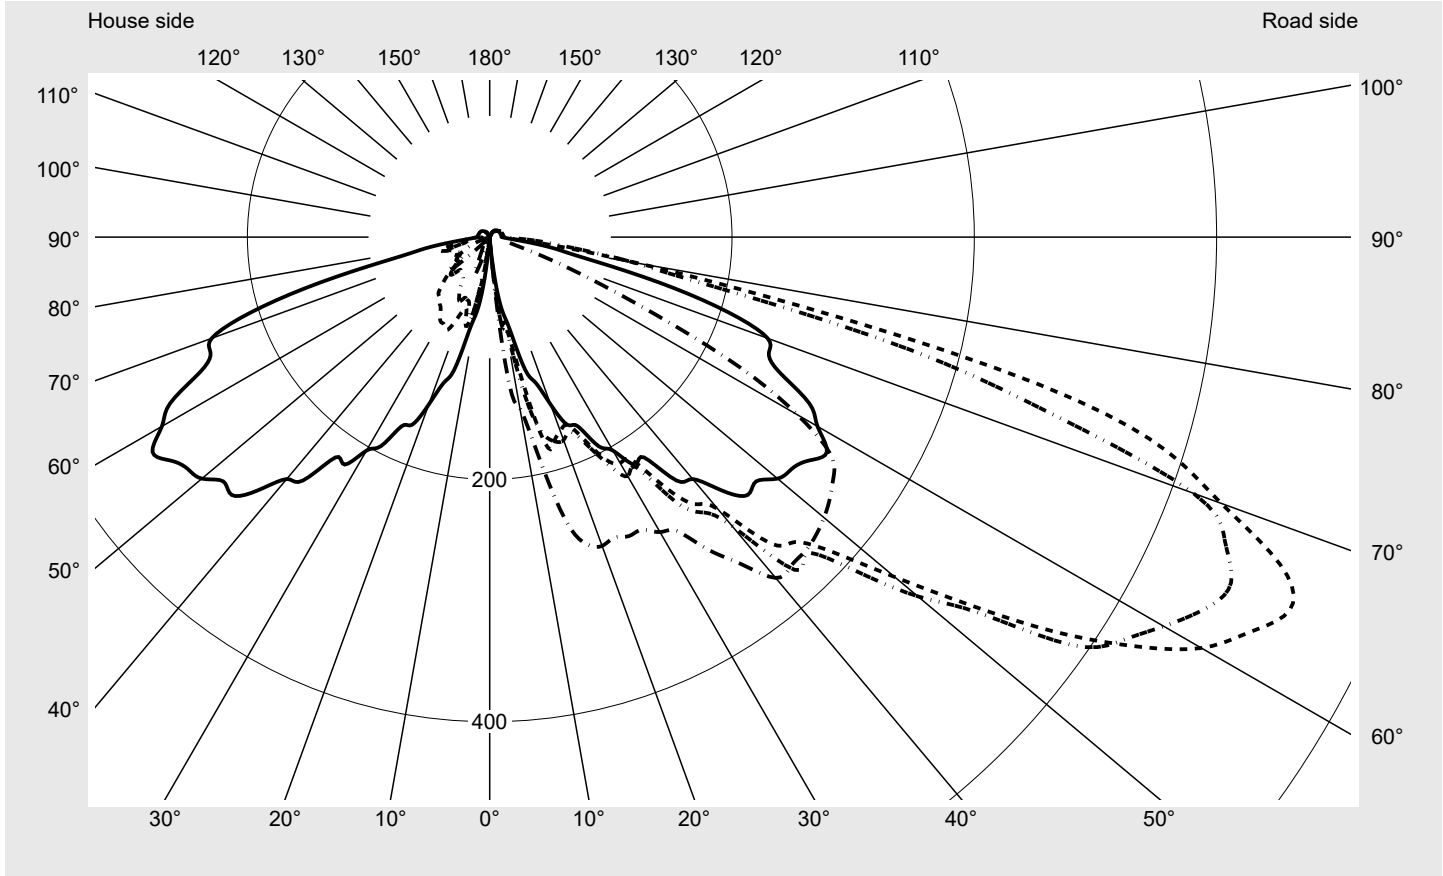

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%


Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	642.6
Imax 80°	150.2
Imax 90°	11.9
Imax >90°	11.6
Imax >95°	11.6

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

# Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575EV14HP00022 + 5XA54000XBL</b> <b>EAN: 4058352074411 + 4050737971421</b>	<b>LP number</b> <b>59425_103</b>
----------------------------------	----------------------------------------------------------------------------------------------------	--------------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**      **siteco**

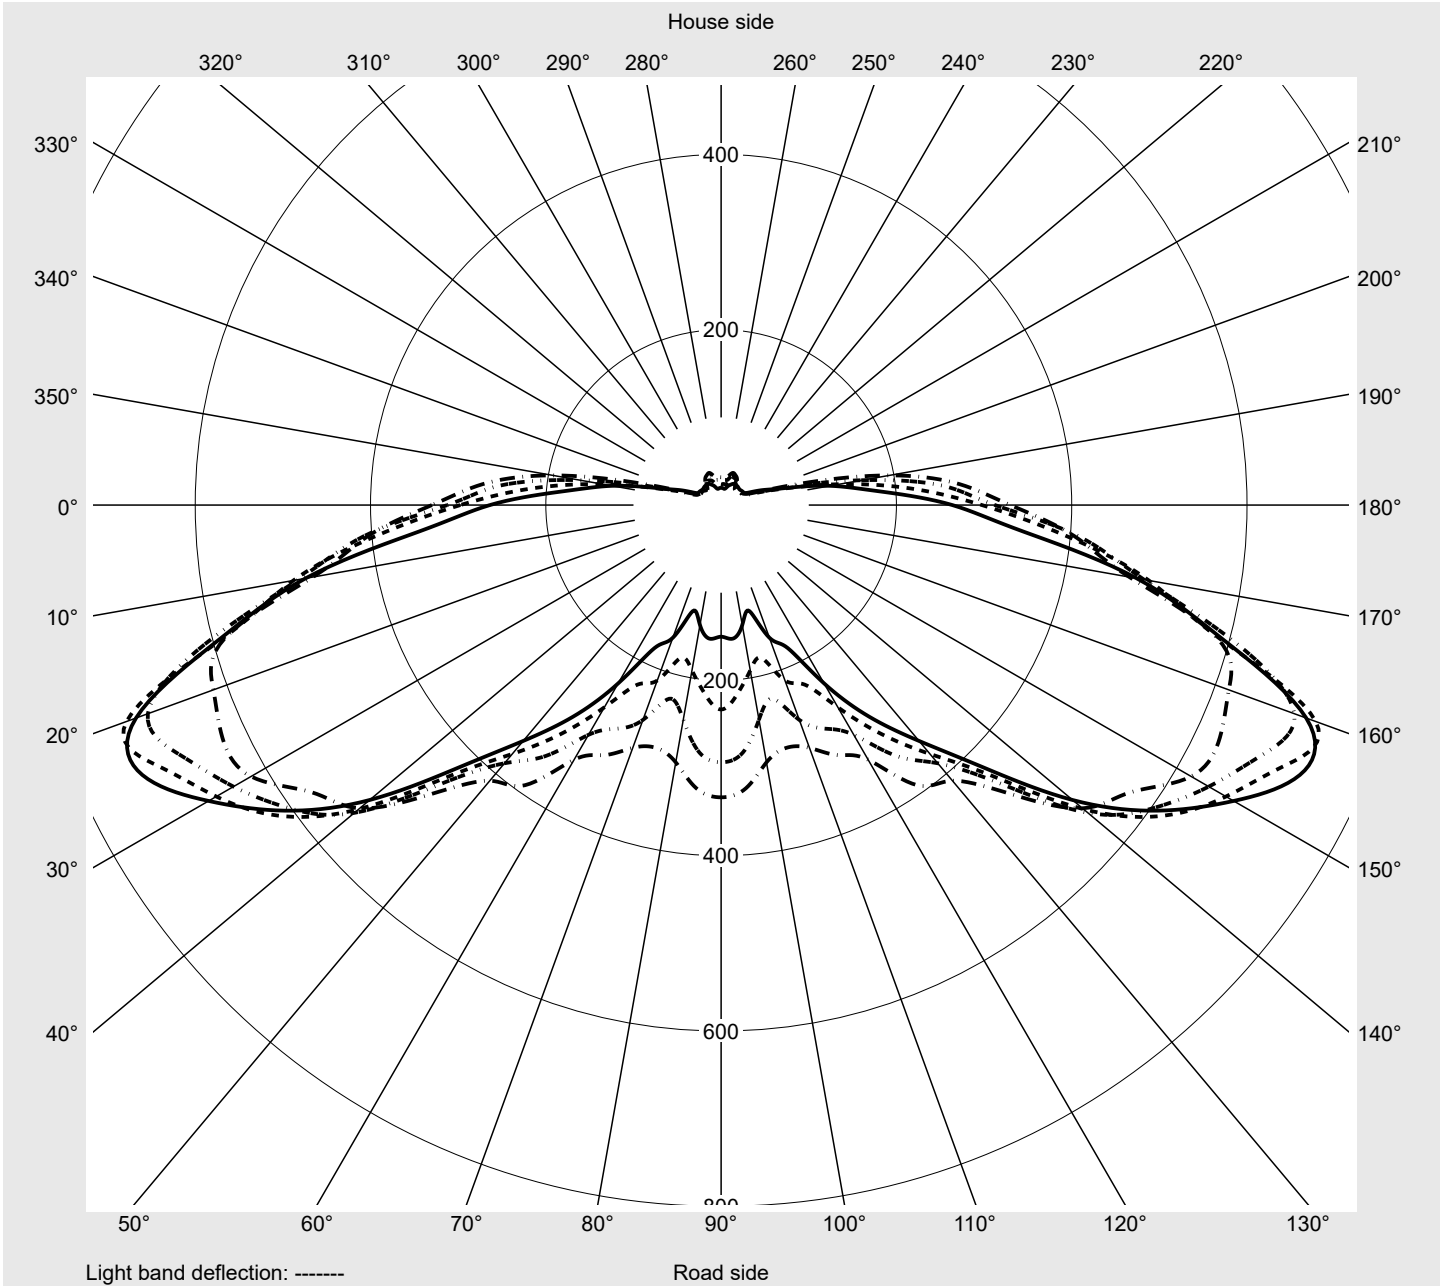

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> 59425_103
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	4.0	4.0	4.1	4.1	4.5	4.5	4.6	4.8	5.0	5.1	5.3	5.5	5.6
5,0°	8.6	9.9	11.2	13.1	14.9	17.0	19.5	21.8	24.1	25.8	26.6	27.0	27.8
7,5°	40.9	50.4	56.9	63.5	69.1	71.0	70.3	69.6	69.0	69.6	72.1	77.9	83.7
10,0°	63.8	63.2	65.2	69.3	74.1	74.4	74.6	79.4	89.6	99.9	112.0	123.2	130.7
12,5°	80.4	82.9	86.7	91.3	106.4	113.5	133.3	149.2	158.0	155.5	152.5	155.1	159.9
15,0°	113.6	119.1	133.3	145.2	161.9	175.8	167.2	172.3	177.3	176.5	175.0	178.0	184.4
17,5°	126.0	142.1	174.5	165.9	173.7	177.0	176.6	186.6	187.6	195.2	196.2	197.3	199.8
20,0°	147.0	152.0	165.7	165.4	171.4	170.4	178.3	177.5	178.1	187.1	192.2	197.0	204.8
22,5°	167.7	170.9	177.8	175.0	173.5	167.9	173.7	180.6	186.6	192.2	199.0	208.1	219.0
25,0°	172.3	171.9	185.2	193.4	190.7	184.4	188.6	195.8	200.3	206.9	214.5	222.3	237.2
27,5°	194.5	195.3	197.8	199.0	201.8	206.6	211.2	218.3	213.7	226.9	238.5	246.3	257.4
30,0°	203.4	209.6	215.0	208.9	214.2	215.5	227.8	243.0	248.4	250.7	264.0	275.7	285.5
32,5°	222.6	219.8	215.5	215.4	210.6	218.2	225.3	238.5	261.8	274.6	288.5	290.9	306.0
35,0°	222.0	231.6	239.2	240.2	231.4	251.4	265.5	281.2	297.4	314.6	320.4	323.4	331.0
37,5°	253.2	256.7	257.4	257.4	260.2	277.9	286.3	306.3	322.4	333.1	352.5	349.8	355.3
40,0°	260.7	261.3	269.4	268.8	270.3	292.8	311.3	335.9	343.0	364.5	370.7	377.4	389.2
42,5°	283.7	283.7	292.8	296.1	317.7	342.7	372.5	386.5	394.3	411.5	410.2	403.1	400.4
45,0°	301.0	298.4	310.3	307.8	319.2	355.9	369.5	402.4	419.3	435.3	442.1	421.6	419.6
47,5°	298.4	295.9	318.6	331.0	348.3	385.4	405.7	438.6	442.3	440.6	446.9	433.3	428.1
50,0°	310.1	326.3	356.8	383.4	382.6	436.5	461.3	473.2	457.0	447.6	443.9	427.4	417.6
52,5°	314.3	357.4	382.1	464.1	456.2	498.2	509.8	507.8	482.6	465.1	443.4	428.2	399.1
55,0°	321.5	386.0	413.2	520.7	542.2	567.0	587.2	541.4	521.5	470.9	433.8	415.3	360.1
57,5°	330.0	404.2	473.0	586.0	616.4	627.9	619.3	571.0	538.2	465.6	410.5	390.2	335.4
60,0°	312.4	409.5	489.9	608.0	696.0	678.3	642.4	602.6	546.3	448.4	384.6	349.7	302.7
62,5°	297.6	393.0	495.5	589.2	722.0	706.6	665.1	617.6	539.7	436.7	370.7	318.9	266.5
65,0°	263.8	345.9	481.5	593.0	710.4	728.6	675.2	607.8	523.5	423.4	351.3	294.9	234.9
67,5°	249.4	304.0	438.0	553.9	690.7	706.3	657.0	591.5	495.9	393.7	327.8	266.0	198.6
70,0°	244.1	320.5	436.3	547.3	631.2	642.6	618.3	523.8	437.2	354.9	294.2	233.9	170.0
72,5°	206.7	321.2	378.3	518.4	592.5	585.0	488.6	442.1	353.0	281.0	224.9	180.3	142.7
75,0°	144.9	254.2	323.7	447.9	476.0	468.2	359.4	314.6	224.8	185.2	174.8	160.4	131.0
77,5°	80.9	145.2	212.5	286.0	316.1	262.0	192.0	169.4	143.1	125.0	125.9	124.9	113.0
80,0°	54.6	73.6	106.5	132.7	150.2	124.5	120.1	129.3	99.2	70.3	53.4	46.3	53.1
82,5°	31.4	39.5	44.3	57.2	65.2	54.3	70.6	90.5	73.3	44.7	25.8	21.2	15.5
85,0°	17.7	19.2	17.5	17.4	16.4	21.7	43.5	52.9	39.0	23.5	16.5	14.4	12.7
87,5°	12.4	12.4	12.6	13.1	13.9	16.2	20.8	21.5	16.4	12.7	12.7	12.1	11.7
90,0°	9.9	10.4	10.8	11.1	11.4	11.6	11.6	11.6	11.6	11.4	11.6	11.4	11.4
92,5°	9.8	10.3	10.8	11.1	11.2	11.4	11.4	11.6	11.4	11.4	11.4	11.4	11.2
95,0°	9.8	10.1	10.4	10.8	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.2	11.2
97,5°	9.8	10.1	10.4	10.8	11.1	11.1	11.4	11.4	11.4	11.2	11.2	11.2	11.2
100,0°	9.8	9.9	10.3	10.6	10.9	11.1	11.1	11.1	11.2	11.2	11.2	11.1	11.2
102,5°	9.4	9.8	10.1	10.4	10.8	11.1	11.1	11.1	11.1	11.1	11.2	11.1	11.2
105,0°	9.4	9.8	9.9	10.3	10.8	10.8	11.1	11.1	11.1	11.1	10.9	10.9	10.9
107,5°	9.3	9.4	9.8	10.1	10.4	10.8	10.8	10.8	10.8	10.8	10.9	10.9	10.9
110,0°	9.3	9.4	9.6	9.8	10.3	10.4	10.6	10.8	10.8	10.8	10.6	10.6	10.6
112,5°	9.1	9.4	9.4	9.8	10.1	10.3	10.4	10.4	10.4	10.4	10.6	10.4	10.6

## Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575EV14HP00022 + 5XA54000XBL</b> <b>EAN: 4058352074411 + 4050737971421</b>	<b>LP number</b> <b>59425_103</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	5.6	5.8	6.0	6.3	6.3	6.3	4.0	4.0	4.0	3.8	3.8	4.0	4.0
5,0°	27.6	26.8	25.8	24.6	23.2	23.2	7.8	7.3	6.3	5.6	5.5	5.1	5.0
7,5°	93.8	102.9	110.2	112.8	120.4	120.4	38.0	27.1	21.3	14.1	10.9	7.3	6.0
10,0°	138.6	142.4	143.9	144.9	143.1	143.2	66.0	65.8	64.0	55.1	39.2	26.0	17.4
12,5°	169.0	176.5	184.8	188.7	185.7	183.6	75.1	71.9	69.8	66.2	64.7	65.3	58.1
15,0°	198.1	213.7	226.3	232.9	237.0	241.8	106.5	89.0	85.2	77.1	75.9	66.2	56.4
17,5°	209.9	223.1	240.0	254.4	263.5	265.6	111.0	93.5	82.9	70.1	63.7	56.6	50.0
20,0°	214.4	231.1	245.3	260.7	270.4	271.3	133.5	116.6	100.1	84.7	64.2	54.9	41.8
22,5°	221.5	229.1	245.3	259.5	262.3	268.6	154.8	139.6	117.3	101.9	76.6	54.3	35.6
25,0°	245.6	249.8	259.5	267.5	271.8	272.2	159.1	147.9	122.9	101.6	84.7	58.4	40.2
27,5°	265.0	271.9	276.2	276.2	274.4	272.2	174.7	158.8	134.8	101.6	81.4	54.6	33.7
30,0°	292.8	287.5	282.2	282.7	280.4	281.2	193.7	170.2	141.3	109.7	80.7	49.0	30.9
32,5°	307.8	305.3	294.2	292.6	287.5	287.8	205.8	184.3	148.0	110.0	76.1	41.4	28.6
35,0°	331.8	320.4	310.3	311.1	312.1	315.3	211.9	183.9	146.9	111.0	70.6	39.4	27.6
37,5°	357.9	359.1	344.4	337.3	336.9	339.7	242.3	207.2	165.1	121.4	68.1	38.0	29.3
40,0°	390.8	381.1	351.8	347.0	354.8	367.2	253.6	214.4	161.6	117.6	64.5	37.0	31.3
42,5°	406.2	388.0	355.3	359.6	366.7	368.2	262.5	216.8	163.4	110.3	62.5	36.9	33.9
45,0°	415.0	391.2	354.8	360.2	366.7	367.5	291.4	239.0	173.7	106.2	55.4	43.7	41.5
47,5°	419.8	379.1	355.6	361.1	366.9	364.9	286.5	223.1	151.7	90.1	48.1	43.0	37.4
50,0°	412.0	365.5	345.5	355.6	362.9	360.2	287.3	224.4	148.0	79.7	38.4	35.9	31.1
52,5°	387.5	351.1	336.3	344.2	353.3	354.0	287.8	222.1	131.0	65.8	34.1	31.3	27.8
55,0°	352.3	329.5	321.9	328.0	344.7	346.3	287.5	216.2	115.8	56.9	32.6	27.8	25.5
57,5°	314.8	294.7	286.8	298.1	324.3	333.4	273.2	195.0	95.6	42.8	30.3	27.3	26.3
60,0°	281.5	260.8	228.7	248.6	283.5	293.4	253.7	163.2	81.0	37.0	28.6	26.3	26.6
62,5°	226.1	213.0	180.9	191.5	215.8	233.2	217.2	137.0	71.1	43.7	31.9	27.3	27.0
65,0°	180.1	161.1	125.4	138.9	153.0	150.2	180.6	126.4	74.4	49.8	33.1	29.3	28.4
67,5°	145.9	111.5	76.7	86.5	92.3	89.3	174.8	115.6	71.6	46.0	33.7	30.6	31.1
70,0°	121.7	84.9	44.0	40.7	44.0	48.6	168.0	115.1	72.3	42.2	34.1	32.1	32.7
72,5°	98.4	53.8	27.8	21.5	20.8	22.8	150.3	105.9	66.5	41.4	37.9	35.2	26.5
75,0°	78.6	27.0	19.5	16.2	15.7	15.5	104.4	78.7	60.4	41.4	42.0	29.6	16.5
77,5°	46.3	18.9	15.4	14.1	13.9	14.2	61.4	54.1	50.9	38.0	32.9	20.5	14.7
80,0°	17.9	14.6	13.6	13.2	13.4	13.6	47.5	45.8	40.4	30.6	23.2	21.0	16.0
82,5°	13.7	12.9	12.7	12.7	12.9	12.9	30.4	29.8	28.1	21.2	19.5	16.5	13.4
85,0°	12.2	12.1	12.1	12.2	12.2	12.2	17.4	18.5	19.7	21.2	19.2	16.4	11.9
87,5°	11.7	11.7	11.7	11.9	11.9	12.2	12.6	13.6	14.9	15.1	14.1	12.7	11.1
90,0°	11.6	11.6	11.6	11.7	11.6	11.9	9.4	9.3	8.8	8.3	7.8	7.3	6.6
92,5°	11.4	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.6	8.1	7.8	7.1	6.5
95,0°	11.2	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
97,5°	11.2	11.2	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
100,0°	11.2	11.2	11.2	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
102,5°	11.2	11.2	11.2	11.4	11.6	11.6	9.1	8.8	8.4	8.1	7.4	7.1	6.5
105,0°	10.9	11.2	11.2	11.2	11.2	11.6	9.1	8.8	8.4	8.1	7.4	6.8	6.5
107,5°	10.9	10.9	11.2	11.2	11.2	11.2	9.1	8.8	8.4	7.8	7.4	6.8	6.5
110,0°	10.8	10.9	10.9	10.9	11.1	11.2	8.9	8.8	8.4	7.8	7.4	6.8	6.3
112,5°	10.6	10.6	10.8	10.9	10.9	10.9	8.8	8.8	8.4	7.8	7.4	6.8	6.3

# Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> 59425_103
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	0.0	0.0
2,5°	4.1	4.5	4.6	5.0	5.3	5.3	4.6	4.6	4.3	4.1	4.3	0.1	0.1
5,0°	4.8	4.6	4.3	4.0	3.6	3.6	3.6	3.5	3.5	3.5	3.3	0.3	0.4
7,5°	5.0	4.6	4.6	4.6	4.5	4.5	4.1	4.0	3.8	3.8	3.6	1.6	2.0
10,0°	11.9	8.6	6.9	5.5	4.6	4.5	4.6	4.6	4.3	4.0	4.0	3.0	5.0
12,5°	42.2	26.0	15.9	7.9	4.6	4.3	4.6	4.8	4.6	4.5	4.3	5.3	10.3
15,0°	53.9	53.8	50.6	38.7	25.3	15.9	7.3	4.8	4.1	4.0	4.0	8.1	18.5
17,5°	43.2	38.0	35.6	35.2	34.2	32.4	29.3	20.8	11.6	7.6	6.6	10.2	28.6
20,0°	33.4	29.4	28.4	26.8	25.6	24.3	23.8	23.8	24.1	27.5	27.5	11.8	40.4
22,5°	27.5	24.3	23.0	20.7	19.8	19.2	20.5	20.2	22.8	30.8	32.1	13.6	54.0
25,0°	29.9	23.3	19.7	18.4	17.0	17.2	22.2	18.5	18.4	22.5	22.5	15.9	69.9
27,5°	27.5	22.3	19.0	17.2	15.4	15.5	18.5	14.9	14.1	16.5	16.5	18.4	88.3
30,0°	26.8	22.8	19.2	17.4	15.7	14.7	15.7	13.1	11.6	13.1	12.9	21.2	109.5
32,5°	25.3	22.3	19.2	17.2	15.1	13.6	13.6	11.6	10.1	10.9	10.9	23.6	133.2
35,0°	25.5	22.3	18.9	17.4	14.9	13.4	12.2	10.6	9.1	9.4	9.6	27.3	160.4
37,5°	24.8	21.7	18.7	16.9	14.6	12.7	11.2	9.6	8.3	8.4	8.6	31.5	191.9
40,0°	27.8	23.0	19.4	16.2	15.1	12.9	10.8	8.8	7.8	7.4	7.6	35.0	227.0
42,5°	31.6	26.3	20.5	18.0	15.9	15.1	11.2	8.9	6.8	6.3	6.0	39.6	266.6
45,0°	32.3	25.1	22.3	22.3	21.7	20.7	19.7	15.1	9.8	6.0	3.3	43.2	309.8
47,5°	31.9	25.6	26.5	30.3	31.8	30.3	28.4	25.5	24.6	15.2	15.2	46.2	356.0
50,0°	27.3	25.5	28.4	33.7	37.5	37.9	37.7	36.4	34.9	36.4	44.0	49.9	405.9
52,5°	25.1	24.1	27.0	33.2	39.2	41.0	42.0	42.8	46.1	40.2	34.7	53.4	459.3
55,0°	24.0	23.0	26.5	33.9	42.7	45.8	43.2	38.5	34.7	34.4	33.4	56.5	515.8
57,5°	25.1	24.8	26.5	31.3	35.9	38.0	39.0	34.9	32.4	32.1	31.8	58.3	574.1
60,0°	25.5	23.8	24.1	28.6	33.7	34.4	35.1	30.3	29.1	28.8	28.8	58.3	632.4
62,5°	26.0	24.5	26.0	28.1	31.3	31.1	29.3	25.3	24.1	24.1	23.5	56.7	689.1
65,0°	27.6	28.0	28.4	28.3	28.0	25.6	23.2	19.8	18.9	19.5	19.5	54.2	743.3
67,5°	30.6	29.9	25.3	18.9	19.8	17.2	15.9	14.6	14.6	14.9	14.6	50.2	793.5
70,0°	31.6	16.2	12.6	14.2	13.6	12.7	11.6	9.9	9.1	8.4	8.3	46.2	839.7
72,5°	14.1	10.3	10.1	10.4	9.3	8.9	8.6	7.9	6.3	4.8	4.6	40.0	879.7
75,0°	12.7	9.9	8.3	7.4	6.8	6.3	6.0	5.3	4.0	3.3	3.0	31.4	911.1
77,5°	11.2	9.4	7.1	6.1	5.5	5.0	4.1	3.5	3.0	2.6	2.6	20.4	931.5
80,0°	11.2	8.6	6.6	5.6	4.8	4.1	3.5	3.1	2.8	2.5	2.3	11.8	943.3
82,5°	11.1	8.1	6.0	5.1	4.5	4.0	3.3	3.0	2.6	2.3	2.3	6.9	950.2
85,0°	8.9	7.1	5.8	5.0	4.3	3.6	3.1	2.8	2.5	2.3	2.3	4.2	954.4
87,5°	8.6	6.5	5.5	4.6	4.0	3.6	3.1	2.8	2.5	2.3	2.3	3.0	957.4
90,0°	6.1	5.6	5.0	4.5	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	959.7
92,5°	6.0	5.5	5.0	4.3	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	962.0
95,0°	6.0	5.3	5.0	4.3	4.0	3.5	3.0	2.6	2.3	2.3	2.3	2.3	964.3
97,5°	6.0	5.3	4.8	4.3	4.0	3.3	3.0	2.8	2.3	2.3	2.3	2.3	966.6
100,0°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.5	2.3	2.3	2.2	968.8
102,5°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.6	2.5	2.3	2.2	971.1
105,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.3	2.6	2.2	973.2
107,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.5	2.3	2.1	975.3
110,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.6	2.6	2.1	977.4
112,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	3.0	2.6	2.6	2.6	2.0	979.4

### Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> 59425_103
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	9.1	9.1	9.4	9.4	9.8	10.1	10.1	10.1	10.3	10.3	10.3	10.3	10.3
117,5°	8.9	9.1	9.1	9.4	9.4	9.8	9.8	9.8	9.9	10.1	9.9	9.9	9.9
120,0°	8.8	8.9	9.1	9.1	9.4	9.4	9.6	9.6	9.6	9.6	9.8	9.6	9.8
122,5°	8.6	8.8	8.8	8.9	9.1	9.1	9.1	9.3	9.3	9.3	9.3	9.3	9.4
125,0°	8.4	8.4	8.6	8.6	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9	8.9
127,5°	8.1	8.3	8.4	8.3	8.4	8.4	8.4	8.6	8.6	8.6	8.6	8.6	8.6
130,0°	7.8	7.9	7.9	7.9	8.1	8.1	8.1	8.3	8.3	8.3	8.3	8.3	8.3
132,5°	7.3	7.4	7.6	7.6	7.6	7.8	7.6	7.8	7.9	7.9	7.9	7.9	7.9
135,0°	6.9	6.9	7.1	7.3	7.3	7.3	7.3	7.4	7.4	7.6	7.6	7.6	7.6
137,5°	6.5	6.6	6.8	6.8	6.9	6.9	6.9	7.1	7.3	7.1	7.3	7.3	7.3
140,0°	6.1	6.1	6.3	6.3	6.5	6.6	6.6	6.6	6.6	6.8	6.9	6.9	6.9
142,5°	5.8	5.8	6.0	6.0	6.1	6.3	6.3	6.3	6.3	6.5	6.6	6.6	6.6
145,0°	5.3	5.5	5.6	5.6	5.8	5.8	6.0	6.0	6.0	6.1	6.3	6.3	6.3
147,5°	5.0	5.0	5.3	5.3	5.3	5.5	5.5	5.6	5.6	5.6	5.8	6.0	6.0
150,0°	4.3	4.5	4.6	4.6	4.8	5.0	5.0	5.0	5.1	5.3	5.3	5.3	5.3
152,5°	3.6	4.0	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
155,0°	3.0	3.0	3.1	3.1	3.3	3.3	3.3	3.5	3.5	3.6	3.6	3.6	3.6
157,5°	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.5	2.5	2.5	2.6	2.6
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.7	1.7
162,5°	1.5	1.7	1.7	1.3	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.2	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> 59425_103
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	10.3	10.3	10.6	10.6	10.6	10.6	8.8	8.6	8.4	7.8	7.4	6.8	6.3
117,5°	10.1	10.3	10.3	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.4	6.8	6.3
120,0°	9.9	9.9	9.9	9.9	9.9	9.9	8.8	8.4	8.1	7.8	7.3	6.8	6.1
122,5°	9.4	9.6	9.4	9.4	9.4	9.6	8.4	8.3	8.1	7.6	7.1	6.8	6.1
125,0°	9.1	9.1	9.1	8.9	8.9	8.9	8.3	8.1	7.8	7.4	7.1	6.5	6.1
127,5°	8.8	8.6	8.6	8.6	8.6	8.6	7.9	7.8	7.4	7.1	6.8	6.5	6.1
130,0°	8.3	8.3	8.3	8.3	8.3	8.3	7.6	7.4	7.1	6.9	6.6	6.3	5.8
132,5°	7.9	7.9	7.9	7.9	7.9	8.3	7.3	6.9	6.8	6.6	6.3	6.0	5.5
135,0°	7.6	7.6	7.6	7.6	7.6	7.9	6.8	6.6	6.5	6.1	6.0	5.6	5.3
137,5°	7.3	7.3	7.3	7.3	7.3	7.6	6.5	6.3	6.0	5.8	5.6	5.3	5.1
140,0°	6.9	6.9	6.9	6.9	6.9	7.3	6.0	5.8	5.6	5.5	5.3	5.1	4.8
142,5°	6.6	6.6	6.6	6.6	6.6	6.6	5.6	5.5	5.3	5.1	5.0	4.8	4.5
145,0°	6.3	6.3	6.3	6.3	6.3	6.6	5.3	5.1	5.0	4.8	4.6	4.5	4.3
147,5°	6.0	6.0	6.0	6.0	6.0	6.0	5.0	4.6	4.6	4.3	4.3	4.0	4.0
150,0°	5.3	5.3	5.3	5.3	5.5	5.6	4.3	4.3	4.0	4.0	3.6	3.6	3.3
152,5°	4.6	4.6	4.6	4.6	4.6	4.6	3.6	3.6	3.3	3.3	3.0	3.0	3.0
155,0°	3.6	3.6	3.6	3.6	3.6	3.6	2.8	2.6	2.6	2.5	2.3	2.3	2.3
157,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.0	2.0	2.0	2.0	2.0	2.0	1.7
160,0°	2.0	1.7	1.7	1.7	1.7	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.5
162,5°	1.5	1.3	1.3	1.3	1.3	1.7	1.7	1.7	1.5	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5575EV14HP00022 + 5XA54000XBL</b> <b>EAN: 4058352074411 + 4050737971421</b>	<b>LP number</b> 59425_103
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	981.3
117,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	983.2
120,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.8	985.0
122,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.7	986.7
125,0°	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.6	988.3
127,5°	5.5	5.0	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.5	989.8
130,0°	5.3	5.0	4.5	4.1	3.8	3.6	3.1	3.0	2.8	2.8	2.6	1.4	991.2
132,5°	5.1	4.8	4.3	4.0	3.6	3.3	3.0	3.0	2.8	2.8	2.6	1.3	992.4
135,0°	5.0	4.6	4.1	4.0	3.6	3.3	3.0	2.8	2.6	2.6	2.6	1.2	993.6
137,5°	4.6	4.3	4.0	3.6	3.5	3.3	3.0	2.8	2.6	2.6	2.6	1.1	994.7
140,0°	4.5	4.1	3.8	3.5	3.3	3.0	3.0	2.6	2.6	2.3	2.3	1.0	995.6
142,5°	4.3	4.1	3.8	3.5	3.3	3.0	2.8	2.6	2.5	2.3	2.3	0.9	996.5
145,0°	4.0	4.0	3.6	3.5	3.3	3.0	2.6	2.6	2.3	2.3	2.3	0.8	997.3
147,5°	3.8	3.6	3.5	3.3	3.0	3.0	2.6	2.3	2.3	2.0	2.0	0.7	997.9
150,0°	3.3	3.3	3.0	3.0	2.6	2.6	2.3	2.2	2.0	2.0	2.0	0.6	998.5
152,5°	2.8	2.6	2.5	2.3	2.3	2.0	2.0	2.0	1.8	1.7	1.7	0.4	999.0
155,0°	2.2	2.0	2.0	2.0	2.0	1.7	1.7	1.7	1.7	1.7	1.7	0.3	999.3
157,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.7	1.3	1.3	0.2	999.5
160,0°	1.5	1.7	1.5	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.6
162,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.8
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.3	1.3	1.7	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EV14HP00022 + 5XA54000XBL <b>EAN:</b> 4058352074411 + 4050737971421	<b>LP number</b> 59425_103
---------------------------	----------------------------------------------------------------------------------------------------	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption	Power consumption	Power consumption
				[W] start of lifetime	[W] end of lifetime	[W] average
100	254	254	4770	33.5	36.0	34.8
95	241	252	4526	31.3	33.5	32.4
90	229	250	4301	29.3	31.3	30.3
85	216	248	4056	27.3	29.2	28.2
80	203	246	3812	25.4	27.1	26.2
75	190	243	3568	23.4	25.0	24.2
70	178	241	3343	21.7	23.2	22.4
65	165	238	3099	20.0	21.3	20.6
60	152	235	2854	18.2	19.4	18.8
55	140	232	2629	16.7	17.7	17.2
50	127	229	2385	15.0	16.0	15.5
45	114	225	2141	13.4	14.3	13.8
40	102	221	1916	12.0	12.7	12.4
35	89	216	1671	10.4	11.1	10.8
30	76	210	1427	8.9	9.4	9.2
25	63	203	1183	7.5	7.9	7.7
20	51	195	958	6.2	6.6	6.4
15	38	184	714	4.8	5.0	4.9
11	28	173	526	3.8	3.9	3.8