
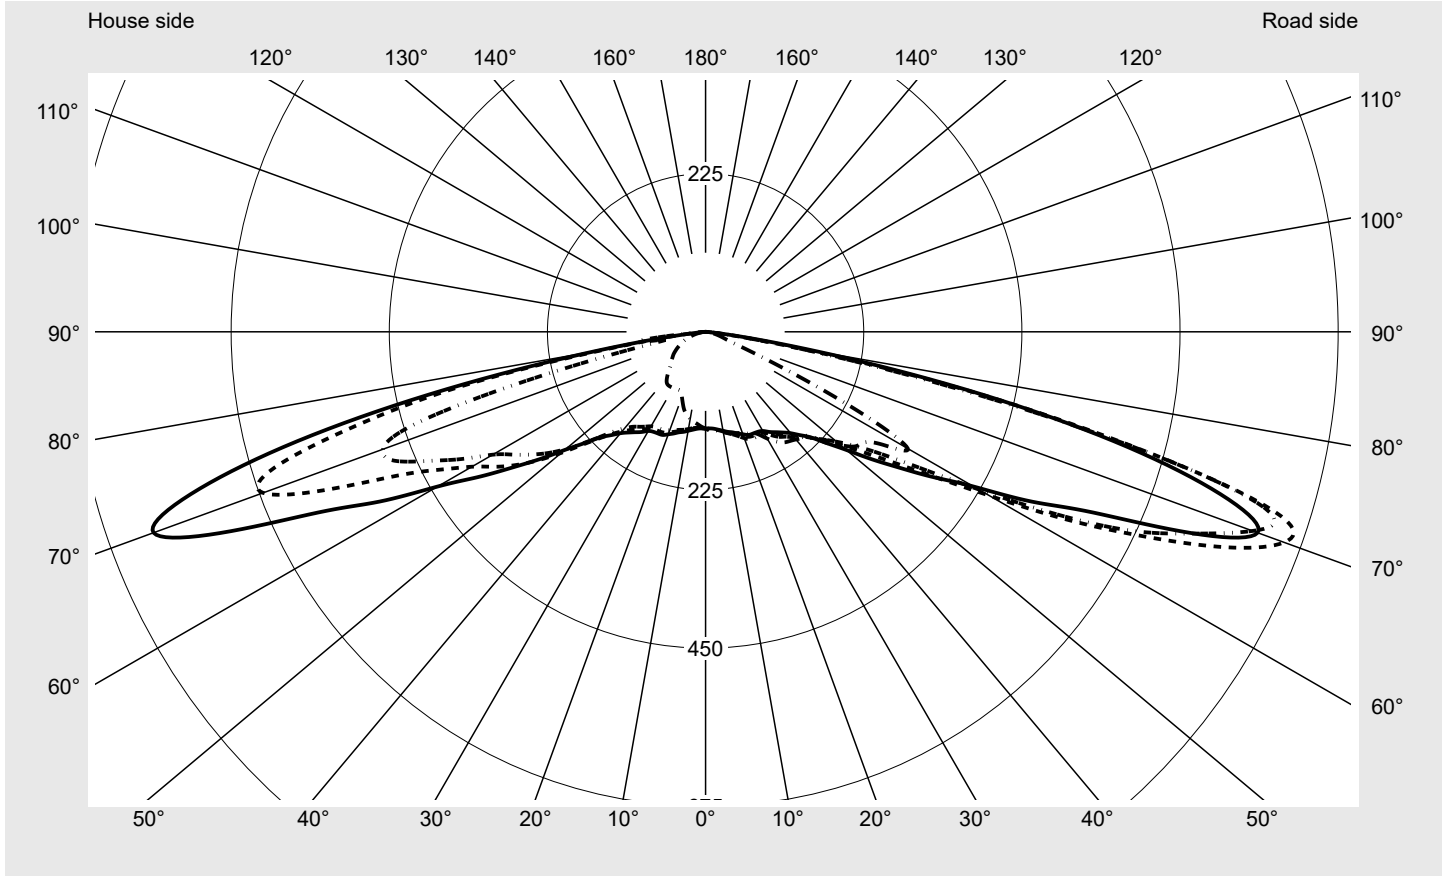


Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, extremely wide distribution (P1.0a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO - Smart Interface Rated values Net luminous flux = 4800 lm Power consumption = 37.7 W Luminous efficacy = 127.3 lm/W	serial documentation 18.04.2024



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 876 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	876.0
Imax 80°	162.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
--	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

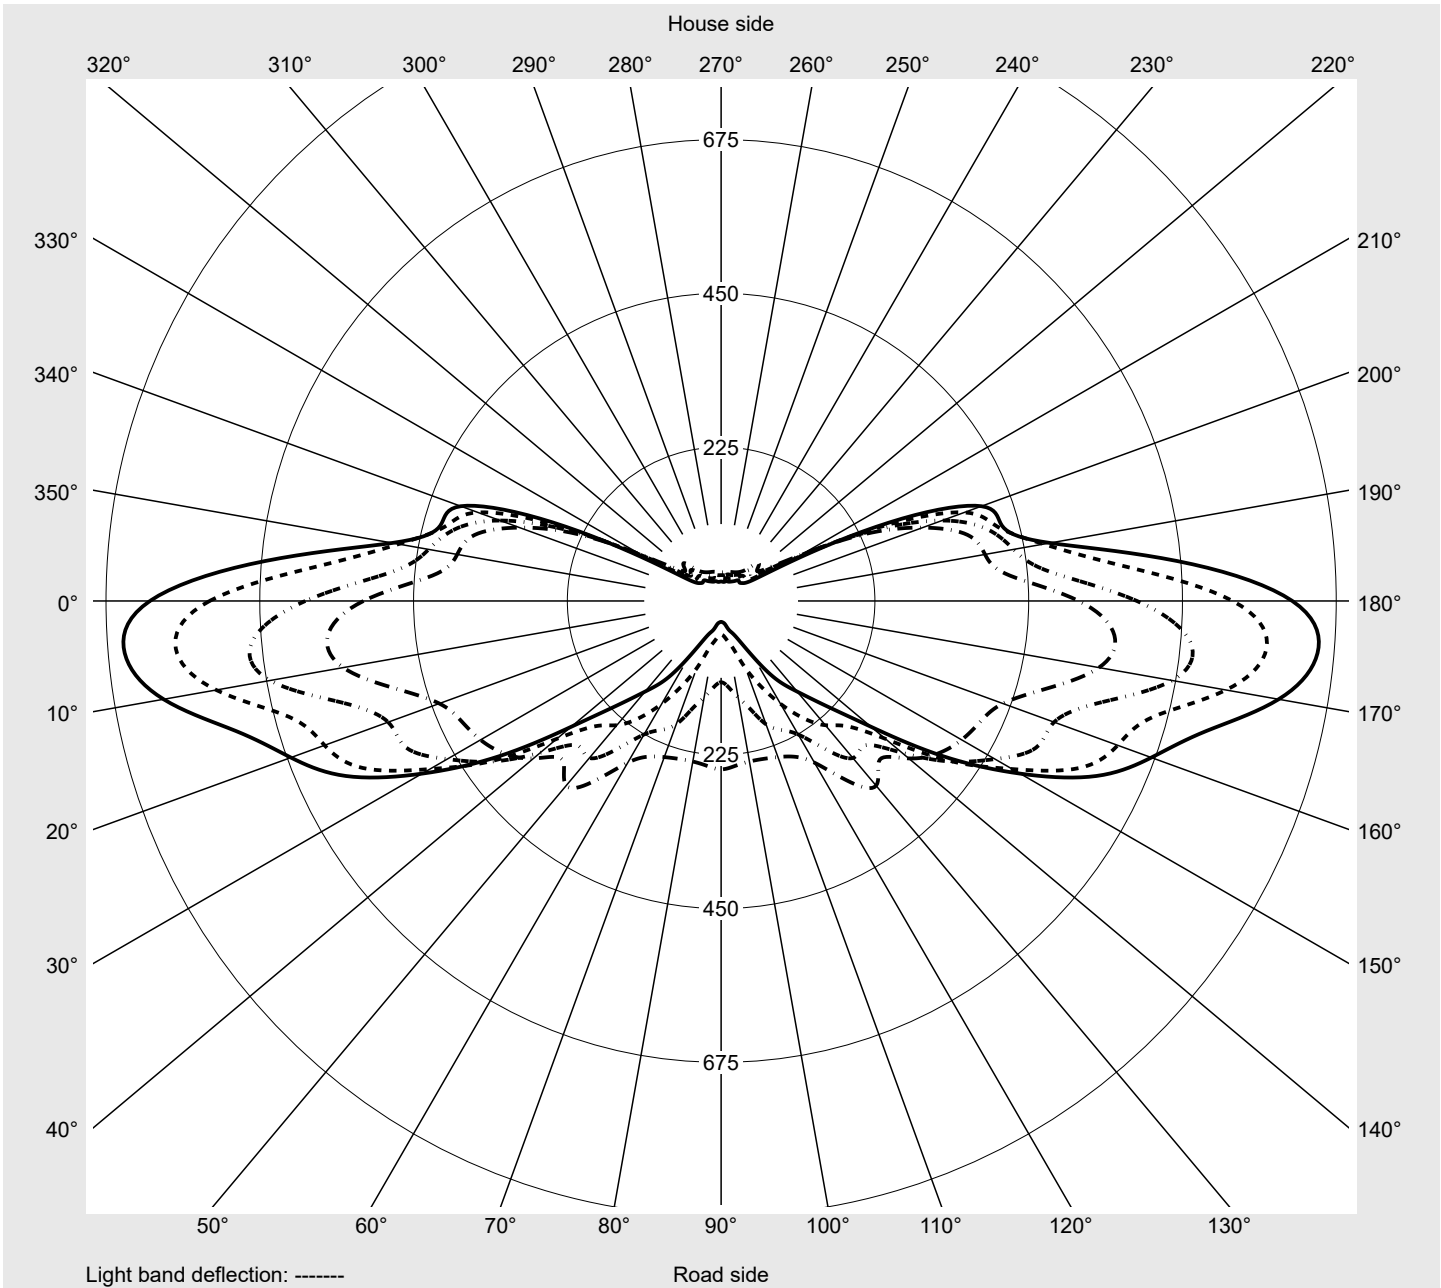

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	137.6	137.8	138.1	138.4	138.7	138.9	139.1	139.2	139.4	139.6	139.8	140.0	140.2
5,0°	138.5	139.2	139.6	140.3	140.5	140.9	141.1	141.2	141.4	141.4	141.4	141.3	141.2
7,5°	140.5	141.3	142.0	142.6	143.1	143.3	143.5	143.3	143.1	142.9	142.6	142.4	142.2
10,0°	143.0	144.0	144.7	145.4	145.8	145.8	145.8	145.5	145.2	145.0	145.0	144.8	144.8
12,5°	145.8	146.9	147.9	148.9	149.3	149.4	149.3	149.0	148.9	149.1	149.1	149.3	149.3
15,0°	148.1	149.7	151.3	152.6	153.4	153.6	153.4	153.2	153.5	153.9	154.4	154.3	153.8
17,5°	151.7	153.6	155.7	157.5	158.7	158.8	158.8	159.1	159.4	159.8	159.7	159.2	158.2
20,0°	155.1	158.1	161.0	163.3	164.2	164.1	164.6	165.3	165.7	165.4	164.5	163.2	161.8
22,5°	158.8	161.7	165.4	168.6	169.9	170.3	170.6	171.2	171.3	170.6	169.1	167.3	166.1
25,0°	159.7	162.7	166.1	169.6	172.1	174.1	175.7	176.2	175.6	174.6	173.5	172.8	171.9
27,5°	160.5	163.1	166.1	169.3	172.0	175.1	178.4	179.6	178.9	178.4	178.4	178.1	176.9
30,0°	162.9	166.0	168.1	170.2	171.6	174.4	178.2	181.1	182.4	182.5	182.5	182.3	182.5
32,5°	168.9	172.1	174.5	175.7	174.6	174.4	176.5	180.0	185.2	187.4	187.6	188.9	191.5
35,0°	174.4	178.4	182.5	184.8	182.5	180.4	176.7	177.9	185.6	194.2	194.3	195.4	199.0
37,5°	180.6	184.7	188.1	190.0	189.4	187.5	184.0	179.4	184.8	195.6	197.1	198.4	207.5
40,0°	188.3	193.0	196.0	196.4	195.8	194.5	193.8	189.1	183.5	191.7	198.6	205.7	221.9
42,5°	199.5	201.6	203.3	202.7	200.8	199.7	201.6	201.1	191.3	187.7	204.5	218.7	240.8
45,0°	212.8	213.5	214.0	210.6	206.9	204.9	205.5	210.8	207.3	188.5	215.7	238.2	261.1
47,5°	234.8	228.3	226.8	222.0	215.4	211.2	210.0	219.7	224.9	198.8	232.6	260.4	279.8
50,0°	261.5	249.9	243.2	238.9	228.9	221.6	220.2	228.8	245.1	220.2	254.2	283.6	303.5
52,5°	297.7	280.2	266.1	259.2	247.5	239.7	238.5	246.0	265.8	247.9	282.3	316.4	335.3
55,0°	337.4	322.0	301.1	288.9	277.4	268.8	266.3	269.5	288.8	278.7	319.2	344.1	347.3
57,5°	385.1	381.6	359.0	337.9	321.9	309.6	301.3	298.3	309.3	319.9	348.2	353.7	371.5
60,0°	440.3	466.2	448.4	408.8	375.5	357.0	344.2	340.3	341.9	339.0	355.2	362.7	338.2
62,5°	523.2	577.6	561.4	494.1	438.7	418.3	406.4	388.4	358.4	328.4	352.8	320.5	273.2
65,0°	608.4	689.1	670.0	574.3	518.4	508.2	462.7	409.5	345.5	298.5	299.9	263.6	225.5
67,5°	748.5	800.9	750.1	654.7	617.4	578.3	491.9	407.7	313.8	258.9	237.3	209.1	173.7
70,0°	835.7	876.0	828.3	735.0	669.9	605.9	505.2	395.6	286.5	216.9	173.1	138.8	95.3
72,5°	767.9	847.4	834.6	753.0	675.5	624.1	476.4	338.3	269.5	155.5	103.4	68.3	45.4
75,0°	601.3	627.5	623.8	596.1	588.3	536.2	347.0	224.8	141.1	94.6	57.6	37.7	31.5
77,5°	377.2	369.4	340.9	324.6	382.3	290.7	181.7	68.8	46.5	55.4	30.3	22.6	19.4
80,0°	162.9	136.5	129.6	138.8	127.6	130.2	48.4	27.0	26.4	29.1	16.9	12.4	11.1
82,5°	43.8	36.6	34.8	35.5	31.5	36.1	19.4	15.8	10.2	11.2	8.3	6.4	6.1
85,0°	4.0	3.8	4.0	5.1	5.8	5.1	4.0	3.4	3.4	3.3	3.4	2.9	2.4
87,5°	1.6	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.1	1.0	1.0	0.9	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	140.3	140.4	140.6	140.7	140.6	140.7	137.3	136.8	136.5	136.2	136.0	135.7	135.4
5,0°	141.1	141.1	141.1	141.0	141.0	140.9	137.8	137.0	136.4	135.7	135.0	134.3	133.8
7,5°	142.0	142.0	142.0	141.9	141.9	141.9	139.4	138.3	137.3	136.3	135.2	134.2	133.3
10,0°	144.7	144.6	144.5	144.5	144.5	144.5	141.8	140.4	139.1	137.7	136.2	134.7	133.2
12,5°	149.0	148.6	148.1	147.8	147.6	147.5	144.3	142.7	141.1	139.3	137.4	135.6	134.0
15,0°	153.2	152.3	151.4	150.5	149.8	149.5	146.4	144.4	142.4	140.2	138.1	136.0	133.8
17,5°	157.0	155.4	153.9	152.4	151.3	151.0	149.2	146.7	143.9	141.2	138.5	135.7	132.9
20,0°	160.4	158.8	156.9	154.9	153.7	153.4	152.3	149.1	145.6	142.2	138.6	135.3	132.1
22,5°	165.5	164.5	162.2	159.4	157.3	156.6	155.1	151.1	147.4	143.6	139.6	135.8	131.5
25,0°	170.8	168.7	166.0	162.7	159.8	158.7	156.2	152.3	148.5	144.4	140.4	136.2	130.8
27,5°	176.0	174.0	171.6	168.7	166.2	165.0	156.9	153.1	149.2	145.0	140.9	135.8	128.2
30,0°	184.5	184.6	183.8	180.6	177.2	175.4	159.5	155.3	150.8	146.5	141.8	134.9	123.5
32,5°	195.4	197.6	198.7	194.5	188.1	184.6	164.6	159.9	154.5	149.5	143.2	133.0	116.6
35,0°	205.3	212.3	214.6	208.3	197.4	192.2	170.0	164.9	159.2	153.4	144.3	128.6	108.6
37,5°	220.1	229.7	229.4	219.5	203.8	196.1	176.3	170.3	164.6	157.3	143.9	122.6	101.1
40,0°	239.9	248.1	246.3	233.7	211.7	199.9	185.0	179.2	172.3	162.5	142.6	115.1	94.4
42,5°	259.0	266.7	261.1	245.8	218.9	204.2	197.3	191.9	183.9	169.6	139.8	107.7	88.8
45,0°	276.7	281.0	272.9	255.5	228.0	209.9	214.7	210.8	199.3	178.4	137.7	99.9	85.4
47,5°	294.0	298.2	291.4	276.4	250.6	234.4	237.9	233.7	216.5	188.6	139.4	93.3	84.2
50,0°	322.1	330.4	318.6	300.5	266.7	251.3	267.9	259.4	235.1	201.0	143.1	91.2	85.4
52,5°	348.5	350.6	342.2	322.0	287.4	267.8	300.3	283.5	253.9	216.6	153.4	94.5	87.8
55,0°	363.6	368.7	344.6	319.7	295.6	274.8	330.8	304.6	274.6	235.8	169.5	102.0	89.2
57,5°	371.4	338.9	325.0	316.3	309.8	299.1	357.3	325.2	301.8	259.9	193.8	115.5	89.8
60,0°	311.8	300.4	292.0	295.6	316.6	332.1	383.9	349.6	330.6	283.7	214.3	128.4	88.8
62,5°	251.4	243.1	239.2	238.5	242.0	246.4	424.5	392.1	373.3	313.8	231.2	134.7	84.5
65,0°	208.3	192.0	163.2	143.3	126.9	119.0	484.3	434.6	404.0	344.1	241.6	131.4	74.2
67,5°	138.1	105.2	74.8	60.9	52.4	49.2	589.7	479.2	419.0	378.8	255.5	121.3	59.0
70,0°	65.5	51.0	43.8	35.2	31.7	30.6	669.9	488.6	425.5	405.3	271.8	102.8	48.7
72,5°	37.7	35.0	33.9	26.0	23.8	23.5	643.4	428.4	419.5	405.8	255.3	81.7	43.6
75,0°	27.9	25.6	24.4	19.8	17.9	17.5	513.0	241.7	319.6	334.9	189.4	58.8	35.0
77,5°	18.2	17.0	15.9	14.2	12.4	12.4	350.6	78.7	160.1	216.5	109.0	42.1	26.4
80,0°	11.5	10.3	9.6	8.1	7.6	7.5	145.4	68.9	132.5	123.3	59.1	28.9	17.3
82,5°	5.9	5.1	4.8	4.2	3.9	4.0	45.8	92.4	98.2	54.2	31.1	19.5	11.7
85,0°	2.2	2.0	1.8	1.6	1.6	1.5	3.8	6.6	9.0	5.6	8.5	7.6	5.3
87,5°	0.8	0.6	0.5	0.5	0.5	0.5	1.7	1.8	1.8	1.8	1.8	1.7	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	0.2	0.2
2,5°	135.3	135.0	134.9	134.9	134.7	134.7	134.9	134.9	135.0	135.1	135.1	1.6	1.9
5,0°	133.2	132.7	132.4	132.1	131.9	131.7	131.8	131.7	131.8	131.8	131.8	3.3	5.1
7,5°	132.4	131.5	130.8	130.0	129.4	129.1	128.9	128.9	128.8	128.8	128.9	4.9	10.1
10,0°	131.9	130.7	129.6	128.6	127.8	126.9	126.4	126.0	125.8	125.8	125.6	6.6	16.6
12,5°	132.1	130.2	128.2	126.5	125.0	123.7	122.6	121.8	121.3	121.2	121.1	8.3	24.9
15,0°	131.3	129.1	126.7	124.4	122.2	120.3	118.7	117.3	116.5	116.0	115.9	10.0	34.9
17,5°	130.2	127.4	124.7	121.4	117.9	114.7	111.9	109.7	108.3	107.5	107.3	11.7	46.7
20,0°	128.7	125.0	120.6	115.6	110.7	106.5	103.3	100.9	99.4	98.7	98.5	13.4	60.0
22,5°	126.5	120.4	113.3	106.9	101.5	97.5	94.6	93.0	92.2	92.0	91.9	15.0	75.0
25,0°	122.9	113.4	104.7	97.9	93.4	91.1	90.1	90.1	90.3	90.8	91.0	16.6	91.7
27,5°	116.8	105.0	96.2	91.1	89.0	88.7	89.2	89.9	90.7	91.3	91.4	18.3	110.0
30,0°	108.8	97.0	90.0	87.8	87.6	87.9	89.0	90.3	91.2	92.0	92.2	20.0	130.0
32,5°	101.0	90.7	87.2	87.1	86.9	87.4	88.7	90.5	91.8	92.7	92.7	22.0	152.0
35,0°	93.8	87.1	86.7	86.6	86.4	87.1	88.8	90.7	92.3	92.8	92.7	24.1	176.0
37,5°	89.0	86.6	86.7	86.0	85.9	86.8	88.2	89.9	91.1	91.2	90.8	26.1	202.1
40,0°	86.3	86.8	85.9	85.4	85.7	86.0	86.4	86.9	87.0	86.2	85.5	28.3	230.5
42,5°	86.3	86.6	85.4	85.2	84.9	84.4	83.0	81.7	80.6	79.4	78.7	30.7	261.1
45,0°	86.9	86.1	84.8	83.6	82.2	80.6	78.7	76.5	74.5	72.5	71.7	33.3	294.4
47,5°	88.0	86.7	83.6	80.8	78.1	76.1	74.1	71.8	69.7	67.7	66.9	36.5	330.9
50,0°	90.6	89.1	81.1	76.3	73.1	71.2	69.0	67.0	65.3	63.7	63.1	40.4	371.3
52,5°	92.5	90.6	77.8	71.4	68.2	66.2	64.1	62.3	60.9	59.7	59.1	44.9	416.2
55,0°	91.0	89.5	75.1	67.0	63.6	61.4	59.1	57.8	56.7	55.7	55.6	49.6	465.8
57,5°	87.1	90.3	71.6	62.0	58.0	56.1	54.5	53.4	52.6	51.2	51.1	54.7	520.5
60,0°	79.8	88.3	67.6	57.7	53.6	51.4	49.9	49.0	48.1	46.8	46.6	59.3	579.8
62,5°	68.5	77.9	63.2	52.8	48.6	46.4	45.1	44.2	43.2	42.2	41.9	62.7	642.5
65,0°	57.6	63.2	56.5	47.7	44.1	41.7	40.4	40.3	38.7	37.8	37.8	64.7	707.2
67,5°	48.5	48.6	48.1	41.8	38.5	36.5	35.2	35.0	33.6	33.4	33.2	66.2	773.4
70,0°	40.7	38.1	39.3	35.9	33.1	31.1	30.1	30.0	28.5	28.1	28.5	67.0	840.4
72,5°	34.1	30.9	31.6	30.4	28.1	26.2	25.0	24.7	23.5	22.9	22.9	63.1	903.6
75,0°	28.3	25.1	25.1	24.8	23.1	21.3	20.1	19.5	18.5	17.9	18.2	48.2	951.8
77,5°	22.0	19.5	18.9	19.3	17.9	16.5	15.2	14.3	13.9	13.4	13.5	27.9	979.7
80,0°	15.2	13.6	13.0	13.6	12.6	11.5	10.6	9.9	9.4	9.2	9.2	13.1	992.8
82,5°	10.2	9.1	8.0	8.7	8.1	7.4	6.8	6.2	5.7	5.6	5.7	5.7	998.5
85,0°	5.1	4.8	4.6	4.6	4.6	4.0	3.6	3.3	3.0	3.1	3.1	1.1	999.6
87,5°	1.6	1.6	1.6	1.4	1.4	1.5	1.5	1.4	1.3	1.4	1.2	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
--	--	-------------------------------

siteco

Dimming levels table		environmental temperature: 25°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average	
100	254	254	4800	37.7	40.9	39.3	
95	238	252	4566	35.3	38.1	36.7	
90	222	249	4322	32.7	35.6	34.2	
85	207	247	4086	30.4	33.0	31.7	
80	192	244	3843	28.1	30.5	29.3	
75	177	241	3592	25.8	28.0	26.9	
70	164	238	3368	23.9	25.9	24.9	
65	150	235	3120	21.9	23.6	22.8	
60	137	231	2883	20.1	21.6	20.8	
55	124	228	2642	18.1	19.6	18.8	
50	111	224	2392	16.3	17.5	16.9	
45	99	219	2157	14.5	15.7	15.1	
40	87	215	1917	12.9	13.8	13.4	
35	75	209	1672	11.2	12.1	11.6	
30	64	204	1443	9.6	10.4	10.0	
25	53	197	1208	8.1	8.7	8.4	
20	42	188	969	6.5	7.0	6.8	
15	31	177	727	5.1	5.4	5.2	
11	22	164	524	3.9	4.1	4.0	

Dimming levels table		environmental temperature: 5°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average	
100	254	254	4940	38.1	41.4	39.8	
95	238	252	4691	35.7	38.6	37.2	
90	223	249	4450	33.3	36.1	34.7	
85	208	247	4202	30.9	33.6	32.2	
80	193	244	3948	28.6	31.0	29.8	
75	179	241	3705	26.5	28.7	27.6	
70	165	238	3455	24.4	26.4	25.4	
65	152	235	3217	22.5	24.3	23.4	
60	138	232	2955	20.5	22.1	21.3	
55	126	228	2726	18.7	20.2	19.4	
50	113	224	2472	16.8	18.1	17.5	
45	101	220	2231	15.0	16.2	15.6	
40	88	215	1966	13.2	14.2	13.7	
35	77	210	1737	11.7	12.5	12.1	
30	65	204	1483	10.0	10.6	10.3	
25	54	197	1246	8.3	9.0	8.6	
20	42	188	981	6.6	7.1	6.8	
15	31	177	735	5.1	5.5	5.3	
11	22	164	530	4.0	4.2	4.1	

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
--	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4870	37.9	41.2	39.6
95	238	252	4628	35.5	38.3	36.9
90	222	249	4377	32.9	35.8	34.3
85	207	247	4136	30.6	33.2	31.9
80	193	244	3904	28.4	30.9	29.6
75	178	241	3648	26.2	28.3	27.2
70	164	238	3402	24.1	26.0	25.0
65	151	235	3168	22.2	24.0	23.1
60	138	232	2928	20.3	22.0	21.2
55	125	228	2683	18.5	19.9	19.2
50	112	224	2431	16.5	17.9	17.2
45	100	220	2194	14.7	15.9	15.3
40	88	215	1951	13.1	14.1	13.6
35	76	210	1705	11.4	12.2	11.8
30	64	204	1452	9.7	10.4	10.0
25	53	197	1216	8.2	8.7	8.4
20	42	188	976	6.6	7.0	6.8
15	31	177	731	5.1	5.5	5.3
11	22	164	527	3.9	4.2	4.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH5A31T08DA EAN: 4069025102966	LP number 59580_475
--	--	--------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	4800.0	37.7
5.0	4940.0	38.1
15.0	4870.0	37.9