
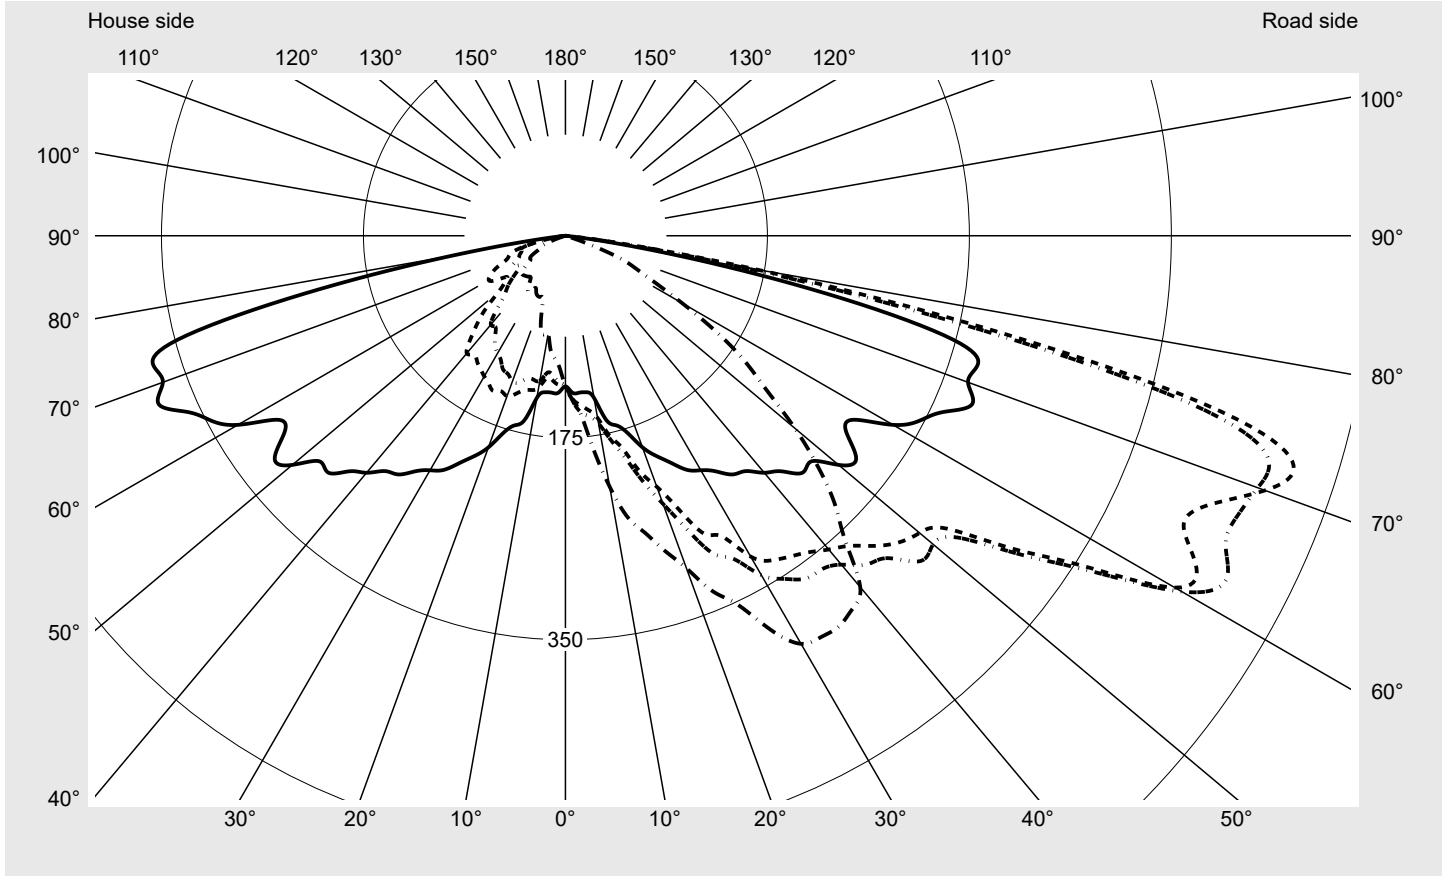


Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
	Version post-top or side-entry mounting Optic asymmetric, extreme wide distribution (ST1.0a) Cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Setting individual position Rated values Net luminous flux = 1550 lm Power consumption = 14.0 W Luminous efficacy = 110.7 lm/W	serial documentation 24.06.2024



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 661 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	645.0
Imax 80°	167.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

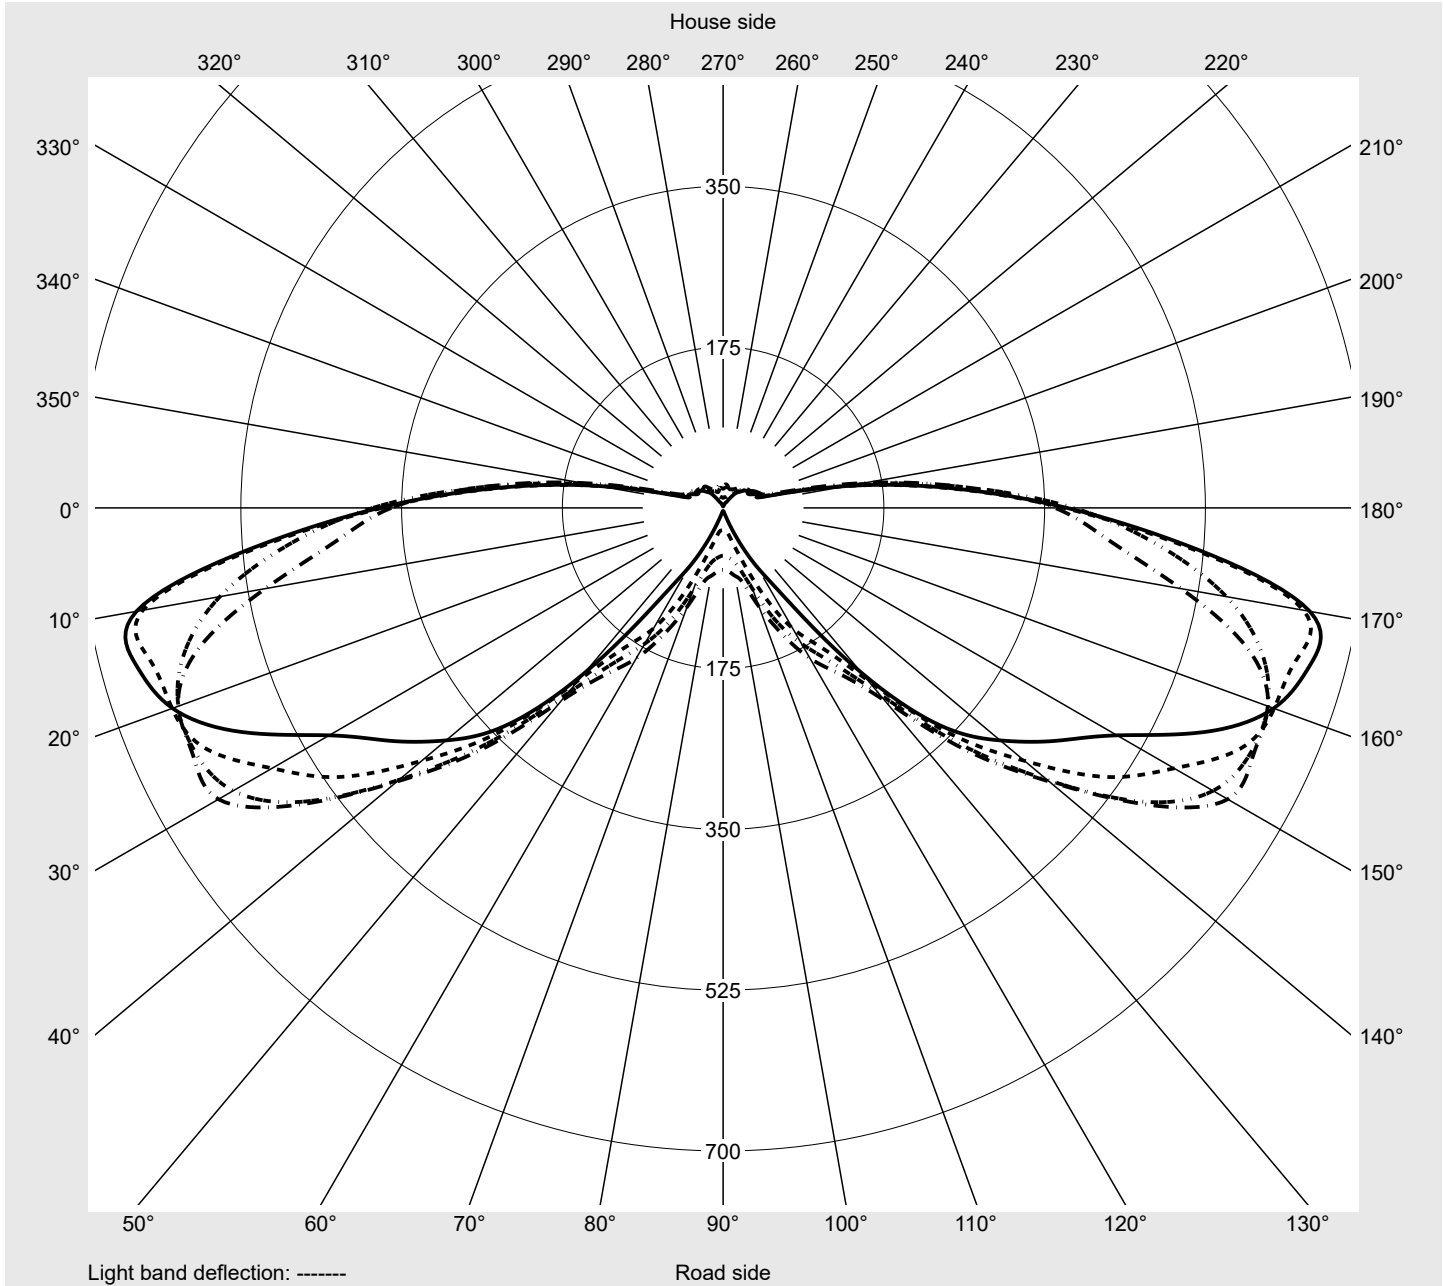

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	136.0	138.5	139.5	141.5	143.1	143.0	142.2	142.5	144.1	144.9	146.0	147.0	146.5
5,0°	136.5	139.7	143.0	147.1	153.5	155.8	154.9	157.2	159.8	161.3	162.4	161.4	159.9
7,5°	136.8	142.1	147.3	152.3	157.6	161.0	165.6	170.9	172.5	171.3	168.7	172.0	177.4
10,0°	142.6	147.8	153.0	160.3	165.1	169.3	177.3	184.1	187.2	191.2	197.2	200.3	201.5
12,5°	163.5	167.3	172.4	177.7	181.1	185.6	192.8	201.2	209.5	215.8	222.2	227.8	228.1
15,0°	170.1	176.4	184.9	190.6	198.6	206.4	211.4	221.4	229.1	235.7	249.5	253.9	257.3
17,5°	179.2	190.7	205.0	214.1	223.0	234.7	240.8	245.8	249.0	249.5	252.7	262.0	271.2
20,0°	195.1	207.0	215.2	231.4	247.2	258.6	268.3	276.9	278.8	279.9	278.5	281.6	289.1
22,5°	206.7	223.1	238.2	256.5	275.4	289.6	298.9	309.0	313.5	307.5	303.6	305.9	310.6
25,0°	217.3	238.7	261.6	285.0	304.1	321.3	330.9	339.9	339.8	328.5	325.0	328.2	331.9
27,5°	228.8	250.7	274.0	293.6	315.7	338.7	353.6	358.1	355.9	348.8	344.1	344.8	350.5
30,0°	234.6	257.8	285.1	320.9	339.6	353.2	369.3	375.8	373.0	369.3	367.3	365.9	370.3
32,5°	242.0	270.2	304.2	333.4	352.5	376.1	390.9	394.3	396.6	397.3	390.7	385.7	391.9
35,0°	252.5	278.7	309.9	339.3	362.7	383.0	387.6	394.2	399.9	400.7	399.8	396.9	399.9
37,5°	257.0	286.3	319.3	345.7	364.5	385.4	398.4	404.7	404.4	401.3	397.7	392.9	395.0
40,0°	268.1	303.0	333.2	354.8	372.0	393.7	405.0	408.1	406.8	400.0	392.0	388.4	386.3
42,5°	276.8	303.3	345.9	364.5	386.3	410.9	422.9	418.4	406.0	399.1	394.1	388.4	385.1
45,0°	290.4	314.6	356.8	380.0	395.0	419.0	427.9	425.9	414.6	410.1	393.1	372.1	367.5
47,5°	289.2	326.3	371.3	392.9	417.2	442.3	443.9	426.0	419.5	419.4	386.4	347.8	344.4
50,0°	308.9	351.5	380.8	400.6	415.9	441.5	454.5	442.7	420.7	400.5	372.2	341.7	317.5
52,5°	317.5	363.9	397.1	416.9	429.8	452.2	458.6	430.6	406.6	377.8	343.7	306.5	283.0
55,0°	297.2	367.5	434.3	472.6	481.5	479.0	482.2	456.7	420.1	362.3	306.7	278.1	254.3
57,5°	296.7	377.7	467.0	532.9	541.4	531.2	516.3	481.5	423.8	352.9	292.5	256.9	237.1
60,0°	327.7	424.7	532.9	609.7	616.7	592.2	550.6	499.9	432.9	346.5	293.2	258.0	225.8
62,5°	346.5	437.1	534.0	615.5	645.4	626.7	593.0	540.4	447.6	365.5	288.9	243.1	205.4
65,0°	361.3	424.1	506.1	591.1	631.1	636.8	634.3	563.0	463.4	371.8	274.1	220.4	189.1
67,5°	381.4	477.6	556.3	606.9	631.1	633.1	615.9	557.5	460.5	362.5	264.1	205.0	170.7
70,0°	371.2	512.4	641.5	645.0	638.4	620.8	567.0	510.7	428.4	345.5	245.1	184.7	151.5
72,5°	374.2	517.9	648.5	661.5	637.8	577.5	495.2	442.1	393.8	335.5	234.2	125.1	75.1
75,0°	347.7	473.1	561.8	587.5	559.1	469.3	379.1	352.4	316.6	217.7	99.9	32.0	9.7
77,5°	231.6	318.2	373.2	380.7	345.4	305.4	256.2	200.5	115.3	39.5	8.3	0.0	0.0
80,0°	101.0	138.7	164.6	167.3	147.4	125.6	89.2	36.7	6.9	0.0	0.0	0.0	0.0
82,5°	20.5	26.6	30.7	35.4	36.7	24.6	7.9	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	144.8	144.1	144.5	144.0	142.6	142.1	133.5	131.6	129.3	126.9	125.2	124.6	123.8
5,0°	158.2	157.8	158.6	158.1	156.5	155.6	133.0	130.2	125.9	121.7	119.4	118.0	114.8
7,5°	178.7	179.4	181.1	183.4	185.1	186.9	132.9	129.1	124.4	119.7	116.9	115.9	112.8
10,0°	205.7	209.9	211.3	215.8	220.4	220.8	140.7	137.8	133.5	127.5	121.9	117.7	111.5
12,5°	232.7	236.3	237.8	243.2	249.0	250.1	154.5	145.0	136.9	127.7	121.4	117.1	113.6
15,0°	261.2	261.9	264.6	264.9	265.0	266.5	160.7	148.9	138.6	128.1	120.8	113.7	107.5
17,5°	277.5	280.8	283.9	286.2	285.1	286.2	166.3	155.1	143.7	133.1	121.5	111.5	104.3
20,0°	298.0	303.4	307.6	308.4	304.5	306.5	178.5	161.6	148.0	134.3	118.9	109.4	102.2
22,5°	320.7	328.0	334.6	335.8	333.1	333.4	182.1	163.0	145.8	129.8	117.7	105.7	95.7
25,0°	338.4	346.6	350.8	353.0	353.2	352.4	190.0	168.2	148.2	127.8	111.4	98.7	90.7
27,5°	359.7	366.9	370.6	377.0	383.3	384.8	200.1	173.4	144.1	121.3	106.9	93.9	79.2
30,0°	375.7	381.5	390.6	401.2	407.5	408.3	205.1	174.8	140.7	117.5	99.7	85.4	71.7
32,5°	393.6	392.0	404.9	419.2	418.6	412.3	207.4	171.7	136.9	113.1	95.0	80.0	69.1
35,0°	404.5	402.8	409.9	423.8	420.5	413.2	213.2	170.1	133.3	106.3	88.2	76.3	67.6
37,5°	399.5	403.3	410.9	416.6	412.9	408.1	213.8	171.6	130.0	99.6	82.1	71.8	65.5
40,0°	386.3	392.3	396.4	395.6	396.2	397.4	217.2	175.9	133.0	100.6	81.7	68.4	61.2
42,5°	386.4	382.6	367.3	363.4	362.2	359.2	228.1	176.0	122.2	89.8	74.3	61.1	55.4
45,0°	365.8	359.0	351.7	346.0	334.0	330.8	235.4	171.4	108.4	76.4	69.0	58.8	52.0
47,5°	342.4	323.4	311.8	307.1	297.3	297.4	228.3	158.8	93.8	69.4	63.7	55.9	47.6
50,0°	302.7	287.1	278.3	268.0	258.2	259.5	230.0	147.2	75.7	63.0	57.4	50.4	44.1
52,5°	267.1	256.9	246.3	226.1	218.2	219.8	221.6	132.2	65.8	55.3	48.9	43.5	41.7
55,0°	236.1	223.9	208.7	185.6	183.8	190.1	211.1	127.7	62.2	48.9	42.9	40.1	39.1
57,5°	214.9	185.4	166.0	156.8	153.2	155.2	215.4	136.8	71.9	47.9	41.8	36.8	35.6
60,0°	190.0	155.2	132.8	126.9	120.0	116.8	227.3	144.6	76.8	52.7	46.0	38.9	36.5
62,5°	169.1	132.8	109.1	99.1	89.9	86.8	251.8	153.0	72.6	48.8	41.4	37.5	34.4
65,0°	151.1	114.6	84.7	75.2	69.3	67.5	262.0	156.1	66.1	44.4	40.7	36.8	31.7
67,5°	135.0	94.0	68.0	57.8	53.7	51.9	261.8	147.7	56.2	43.0	38.7	36.4	32.8
70,0°	105.8	62.0	38.0	27.3	24.7	24.3	246.4	137.3	52.4	40.5	36.3	34.4	34.0
72,5°	39.1	15.5	7.3	4.1	3.5	3.4	247.9	137.3	48.9	40.1	34.9	31.0	31.9
75,0°	0.8	0.0	0.0	0.0	0.0	0.0	221.1	119.2	39.4	37.2	34.1	29.4	28.2
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	144.4	78.3	25.0	25.1	25.2	20.5	15.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	62.8	34.1	12.2	12.0	10.8	6.6	2.1
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.0	6.8	2.7	2.6	1.8	0.7	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	0.2	0.2
2,5°	122.7	120.0	117.8	117.0	116.9	114.6	112.3	113.9	114.3	113.7	114.7	1.6	1.8
5,0°	111.7	109.2	107.6	107.8	107.6	106.4	106.8	106.6	106.1	106.5	106.6	3.2	5.0
7,5°	109.8	108.4	104.8	100.5	98.9	96.9	95.7	96.6	96.1	97.0	99.1	5.0	10.0
10,0°	107.0	105.7	103.6	102.1	100.6	98.1	97.2	93.4	87.9	86.3	86.3	7.1	17.1
12,5°	108.9	103.0	100.0	97.9	96.7	94.5	92.5	90.1	87.2	86.9	87.7	9.5	26.6
15,0°	102.9	98.9	93.7	89.9	86.2	83.4	81.8	80.9	80.2	81.1	82.5	12.0	38.6
17,5°	97.9	92.0	87.4	83.5	79.7	75.4	71.2	70.8	70.5	69.2	68.3	14.5	53.1
20,0°	94.0	88.2	83.8	80.3	77.8	74.4	69.6	64.6	60.5	58.6	57.5	17.5	70.6
22,5°	87.7	80.7	77.3	76.3	74.7	70.4	67.8	65.8	63.3	59.0	57.3	20.8	91.4
25,0°	82.5	75.7	71.0	69.8	66.1	61.6	60.8	59.7	57.3	56.8	57.3	24.1	115.5
27,5°	74.4	72.4	69.4	66.4	61.7	58.7	57.3	57.1	56.9	55.4	54.9	27.4	142.9
30,0°	64.9	65.9	63.6	59.1	58.8	59.6	58.4	57.0	54.2	52.0	52.1	30.7	173.6
32,5°	64.8	61.8	58.4	57.3	57.7	56.3	53.8	53.2	53.4	55.5	57.3	34.1	207.7
35,0°	62.9	58.8	54.5	54.8	56.4	52.9	48.3	48.1	53.0	56.5	56.7	36.7	244.4
37,5°	60.6	57.7	54.8	53.1	52.5	52.4	51.6	49.2	49.3	50.9	51.0	38.9	283.3
40,0°	57.8	54.5	53.2	51.0	47.8	47.5	49.6	50.7	50.8	48.8	46.9	40.9	324.2
42,5°	54.2	51.8	48.1	46.9	46.8	48.5	49.4	49.8	49.9	48.7	48.0	42.5	366.7
45,0°	52.0	50.5	45.3	46.0	48.5	46.7	50.3	53.4	49.4	48.0	49.1	44.0	410.7
47,5°	44.6	45.0	44.6	44.1	42.0	42.4	45.4	48.7	46.6	46.2	50.1	44.6	455.3
50,0°	42.7	41.3	41.0	44.4	43.6	41.8	43.7	45.3	45.4	47.0	49.3	44.9	500.3
52,5°	42.8	40.1	37.4	40.8	42.8	41.7	39.9	41.4	43.3	44.0	43.9	44.4	544.7
55,0°	39.5	36.8	37.5	39.4	39.1	38.7	37.6	37.9	37.9	37.7	37.2	44.9	589.6
57,5°	37.9	36.2	36.2	35.3	34.2	35.0	34.5	34.9	36.1	36.4	36.3	46.4	636.0
60,0°	36.1	36.7	35.0	31.8	29.8	29.4	31.0	31.5	31.8	32.4	33.0	49.2	685.2
62,5°	31.2	33.6	34.9	30.3	27.4	26.1	26.3	27.8	28.2	27.2	26.2	50.5	735.7
65,0°	29.9	30.4	30.5	26.2	23.6	22.4	21.6	22.8	25.2	25.6	24.1	50.4	786.1
67,5°	30.4	27.7	24.1	21.8	21.1	20.1	18.3	18.6	21.4	21.9	20.8	50.7	836.8
70,0°	32.0	26.4	22.3	18.3	17.7	16.6	13.9	12.3	12.1	11.4	10.9	49.4	886.2
72,5°	29.0	24.5	20.6	12.7	7.4	6.2	4.3	2.6	1.9	1.7	1.6	45.6	931.7
75,0°	24.1	16.9	8.6	3.1	0.8	0.2	0.0	0.0	0.0	0.0	0.0	36.5	968.3
77,5°	10.3	3.7	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	990.0
80,0°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	998.4
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1MC1F08CE EAN: 4069025076410	LP number 59453_353
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1550	14.0	14.2	14.1
95	241	252	1471	13.3	13.5	13.4
90	229	250	1397	12.6	12.8	12.7
85	216	248	1318	11.9	12.1	12.0
80	203	246	1239	11.2	11.4	11.3
75	190	243	1159	10.6	10.7	10.6
70	178	241	1086	10.0	10.1	10.0
65	165	238	1007	9.3	9.4	9.4
60	152	235	928	8.6	8.7	8.6
55	140	232	854	8.0	8.1	8.0
50	127	229	775	7.4	7.5	7.4
45	114	225	696	6.9	7.0	7.0
40	102	221	622	6.3	6.4	6.4
35	89	216	543	5.7	5.7	5.7
30	76	210	464	5.0	5.1	5.0
25	63	203	384	4.4	4.5	4.4
21	53	197	323	3.9	4.0	4.0