
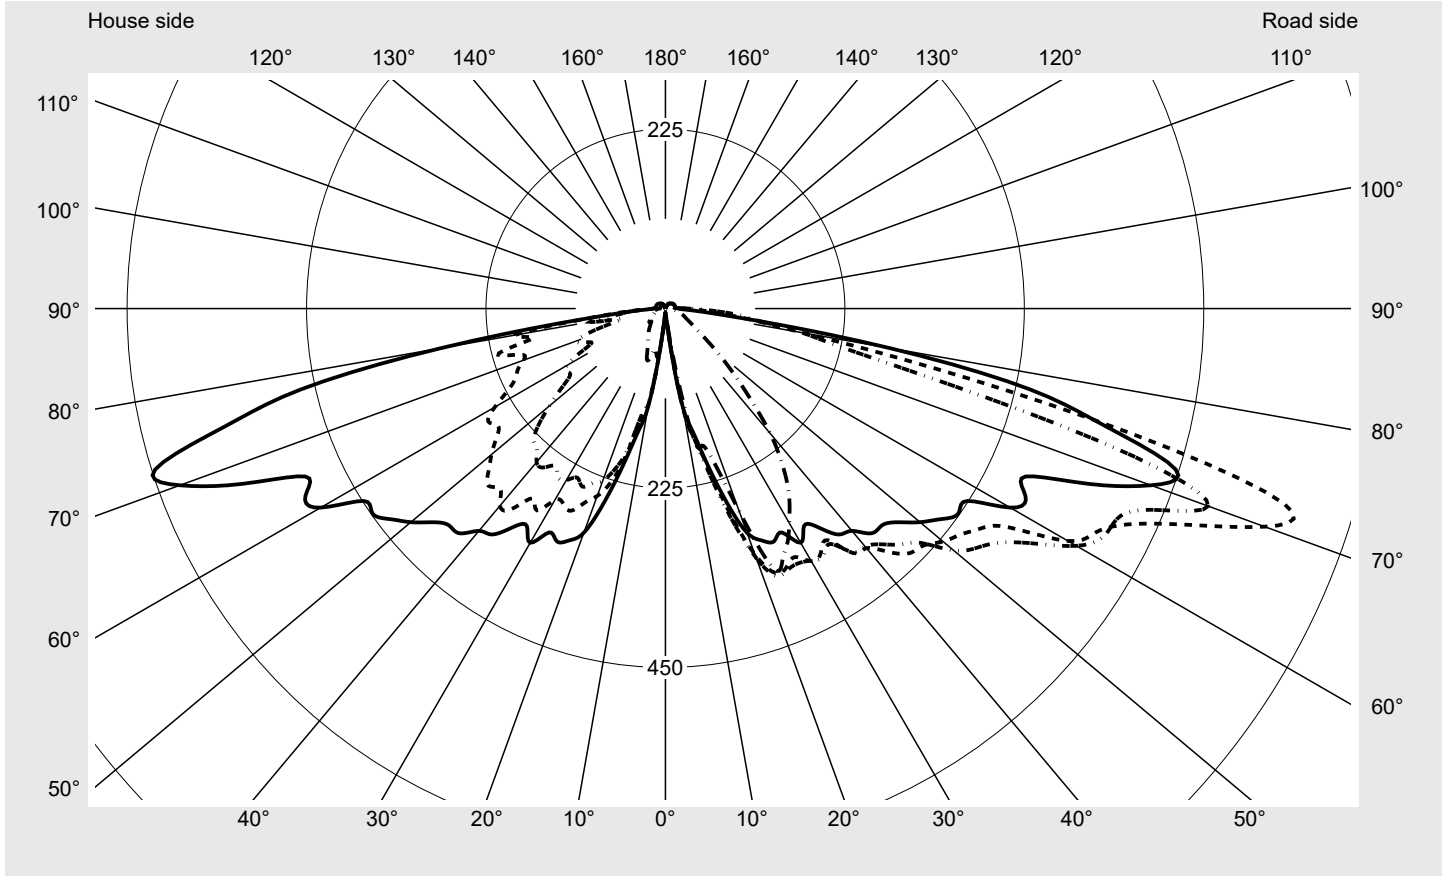


Photometric test report

Family DL 11 iQ 	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
	Version post-top- or mounting to wall arm Optic asymmetric, extremely wide distribution (P1.0a) Cover cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 3950 lm Power consumption = 33.6 W Luminous efficacy = 117.6 lm/W	serial documentation 17.07.2024

Luminous intensity in cd/klm C180-0 C190-10 C195-15 C270-90 **Imax: 813 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	799.6
Imax 80°	285.8
Imax 90°	34.0
Imax >90°	17.5
Imax >95°	12.2

Measurement conditions

DIN EN 13032 and DIN 5032


Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
---------------------------	--	-------------------------------

Envelope curve in cd/klm

KMK 72.5°
KMK 70°
KMK 67.5°
KMK 65°

siteco

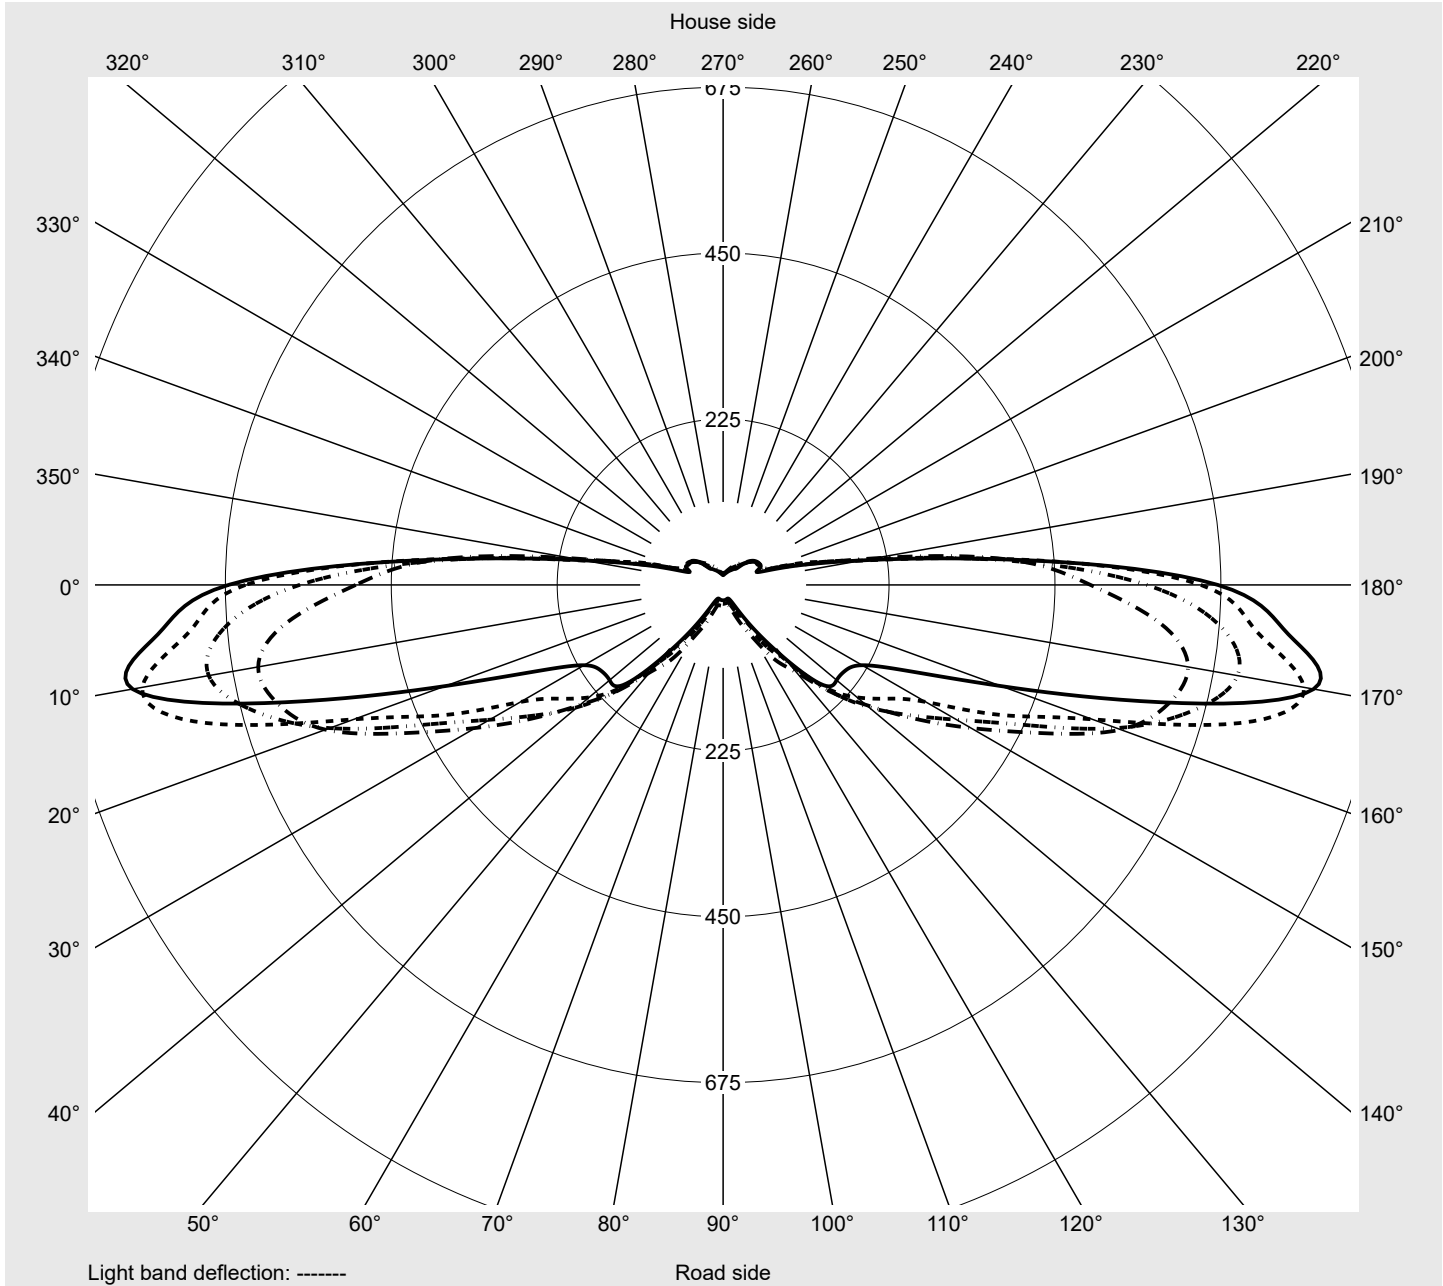

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	5.9	5.8	5.9	6.0	6.0	5.9	6.1	6.1	6.2	6.2	6.3	6.5	6.7
5,0°	11.1	10.5	10.0	9.4	9.2	9.0	8.9	8.9	9.0	9.1	9.1	9.3	9.3
7,5°	51.0	46.1	42.5	39.9	38.1	36.6	35.7	34.7	34.6	34.0	33.0	32.1	31.1
10,0°	125.2	125.3	128.8	126.8	124.3	116.8	101.6	92.3	89.6	88.8	87.0	85.9	87.1
12,5°	157.8	165.8	167.3	166.7	167.7	171.0	177.7	180.6	167.5	153.4	147.6	146.2	148.0
15,0°	201.1	204.4	204.8	216.7	228.3	228.4	230.0	230.6	242.1	252.3	252.3	242.0	227.8
17,5°	253.8	262.8	270.0	277.9	277.4	289.2	300.2	308.8	306.4	302.3	293.9	287.1	279.8
20,0°	299.1	311.6	328.2	332.9	334.9	330.4	321.5	311.9	309.5	316.8	321.9	316.6	305.0
22,5°	314.6	335.2	358.6	363.0	364.4	364.6	357.3	348.6	332.9	325.4	318.8	322.5	316.2
25,0°	322.1	337.7	358.4	361.9	366.3	367.9	366.4	359.8	344.9	332.8	326.9	317.9	310.3
27,5°	316.5	339.4	351.3	360.2	372.3	372.7	367.6	361.0	352.0	328.9	314.9	310.5	299.8
30,0°	339.1	357.1	365.7	365.0	366.6	371.8	373.7	357.0	339.3	327.0	307.3	300.0	286.5
32,5°	323.4	344.3	362.8	367.9	369.8	358.4	355.5	343.1	320.0	312.0	293.7	283.0	265.5
35,0°	335.2	356.8	354.5	360.1	371.4	375.6	365.5	350.1	327.5	305.1	279.4	264.0	244.6
37,5°	357.1	373.5	386.4	384.8	370.9	357.5	361.1	342.1	320.9	297.5	266.6	246.0	224.5
40,0°	363.8	381.6	392.1	389.7	388.8	367.7	352.3	329.0	302.3	280.4	253.4	223.8	203.9
42,5°	382.3	402.3	413.8	400.9	396.3	380.6	362.2	337.7	297.9	261.8	233.4	208.6	198.8
45,0°	384.2	407.0	433.5	418.1	400.9	367.4	351.6	320.8	286.1	256.5	231.1	200.7	190.7
47,5°	396.6	411.1	439.5	435.0	431.1	383.2	358.6	315.0	276.8	245.4	210.2	189.5	178.8
50,0°	416.7	432.1	454.5	471.8	470.1	407.5	356.6	305.7	255.1	223.1	183.9	175.3	166.3
52,5°	433.9	469.5	465.8	492.6	476.3	426.2	360.0	290.1	244.5	209.3	168.8	162.7	151.9
55,0°	448.3	486.3	481.4	511.7	475.9	443.5	374.1	299.6	239.6	193.1	160.7	161.9	140.5
57,5°	448.9	502.6	510.5	548.2	520.2	455.0	366.9	298.1	237.0	192.7	165.4	157.8	122.0
60,0°	499.1	547.3	582.8	595.0	567.4	479.6	375.6	313.0	253.5	197.7	167.4	150.2	117.9
62,5°	508.9	568.6	608.1	619.3	601.4	492.2	387.9	321.1	256.2	206.2	169.0	135.3	108.2
65,0°	498.2	594.8	640.2	624.5	573.8	475.4	388.0	315.8	253.2	203.9	154.9	124.9	85.7
67,5°	574.4	679.9	708.3	659.2	567.7	448.9	365.6	307.9	257.8	201.5	139.1	100.3	59.7
70,0°	647.9	726.4	799.6	724.2	532.9	417.7	317.4	269.0	237.3	197.6	135.3	82.2	46.1
72,5°	670.9	769.5	813.2	614.7	401.1	275.6	217.8	202.4	201.0	192.1	129.6	74.0	37.0
75,0°	572.7	659.7	603.1	372.2	231.6	175.1	154.5	139.0	140.7	142.2	94.4	54.8	27.2
77,5°	468.0	444.5	344.0	230.3	173.5	141.8	125.2	119.0	101.9	81.7	52.9	33.2	21.1
80,0°	285.8	235.7	176.8	173.6	137.8	94.2	90.9	98.1	70.3	55.6	37.7	24.2	16.4
82,5°	113.1	97.9	110.0	117.4	95.8	70.1	77.6	67.0	40.5	31.9	25.2	18.8	14.1
85,0°	47.4	54.3	66.4	91.3	81.1	55.8	51.6	40.8	26.6	23.1	19.1	14.7	12.3
87,5°	21.5	29.3	43.7	58.6	44.3	33.5	28.3	20.7	16.9	16.4	15.6	12.1	11.3
90,0°	16.4	20.8	29.3	34.0	25.5	18.7	17.7	13.4	12.6	12.9	12.4	11.1	10.8
92,5°	13.1	13.4	17.5	14.9	13.6	12.7	12.0	11.7	11.4	11.1	10.9	10.7	10.4
95,0°	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.2	11.0	10.8	10.5	10.4
97,5°	12.2	12.2	12.2	12.2	12.1	11.8	11.6	11.4	11.2	10.9	10.8	10.5	10.4
100,0°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.1	10.8	10.7	10.5	10.4
102,5°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.0	10.9	10.7	10.5	10.4
105,0°	12.2	12.2	12.2	12.1	12.0	11.7	11.4	11.2	11.0	10.8	10.6	10.5	10.4
107,5°	12.1	12.1	12.1	12.0	11.8	11.6	11.3	11.1	10.9	10.7	10.5	10.4	10.3
110,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.0	10.8	10.6	10.5	10.4	10.3
112,5°	11.9	11.8	11.9	11.7	11.6	11.4	11.1	10.9	10.7	10.5	10.4	10.3	10.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		Maximum luminous intensity
		siteco


C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	6.8	7.0	7.1	7.3	7.3	7.4	5.9	5.9	6.0	6.1	6.1	6.1	6.2
5,0°	9.4	9.5	9.7	9.8	9.8	9.8	11.7	12.5	13.8	15.5	17.4	18.5	19.5
7,5°	30.0	28.4	27.6	27.4	26.9	26.6	53.0	53.4	52.5	51.4	50.3	50.6	51.3
10,0°	88.0	90.4	91.0	91.9	92.3	91.4	120.8	120.8	116.9	104.2	91.8	78.5	72.5
12,5°	153.1	158.8	164.5	170.5	172.5	172.3	146.0	139.3	134.8	134.5	129.3	125.1	117.5
15,0°	211.6	200.5	189.3	183.1	178.5	177.9	196.5	190.6	182.9	173.5	168.2	149.9	132.7
17,5°	269.1	253.6	232.4	214.6	204.0	201.5	238.8	229.0	211.4	186.1	168.3	150.0	130.3
20,0°	301.9	298.2	289.8	280.8	274.3	270.1	269.6	250.1	229.7	204.9	176.3	152.9	134.4
22,5°	317.4	318.6	316.8	324.3	342.3	352.1	289.5	263.0	236.5	208.1	175.0	145.3	128.4
25,0°	316.0	319.1	322.1	336.7	346.6	347.4	302.2	279.7	246.3	211.8	174.9	139.4	120.9
27,5°	301.6	301.1	306.9	322.1	329.5	331.3	299.7	276.8	239.1	196.9	169.4	144.6	112.7
30,0°	282.6	280.2	289.2	303.6	307.7	310.4	307.9	277.2	248.6	204.2	170.2	137.6	96.5
32,5°	259.6	260.0	271.1	283.7	286.3	289.7	322.2	300.0	250.5	202.2	164.6	116.8	85.2
35,0°	237.3	241.4	253.3	262.2	264.2	265.8	315.1	290.5	240.9	200.6	160.5	108.3	84.8
37,5°	216.8	222.2	232.2	236.8	236.6	236.7	340.4	316.9	251.2	212.6	149.5	103.0	76.2
40,0°	198.5	203.8	207.7	208.8	205.4	204.6	351.4	322.5	251.3	201.1	135.1	98.7	62.3
42,5°	188.3	182.1	180.8	176.1	168.7	166.1	357.5	306.5	238.4	176.6	123.5	83.0	60.4
45,0°	179.7	164.3	154.8	145.8	136.4	133.1	370.3	314.1	233.4	148.8	105.1	68.9	62.4
47,5°	160.6	141.3	129.1	118.0	110.3	106.6	373.9	300.6	215.6	123.6	82.7	64.1	59.9
50,0°	144.8	124.3	109.5	96.5	87.8	84.2	373.2	284.7	190.0	107.7	66.5	59.7	56.2
52,5°	126.5	104.1	92.6	78.0	68.8	65.8	369.4	267.3	164.9	93.5	62.4	56.7	54.2
55,0°	111.3	85.8	74.1	60.3	54.1	52.5	373.7	256.3	145.8	82.8	62.7	56.7	54.2
57,5°	93.5	75.6	62.0	47.5	43.7	43.4	379.7	263.4	146.9	82.8	62.7	55.2	54.5
60,0°	86.0	60.1	46.8	37.9	37.1	37.0	385.2	246.9	142.8	83.5	61.6	58.2	56.8
62,5°	82.5	48.9	35.8	32.3	32.1	32.1	389.4	223.1	121.9	77.7	56.3	56.6	54.8
65,0°	59.7	38.9	29.0	28.1	28.3	28.5	391.4	207.5	102.2	66.3	55.9	56.8	55.3
67,5°	40.4	28.9	25.1	25.0	25.4	25.7	382.8	200.4	111.7	62.2	54.7	56.8	55.0
70,0°	30.9	24.2	22.2	22.4	23.1	23.2	397.6	189.6	117.8	59.5	55.3	57.1	53.1
72,5°	22.9	19.6	19.7	20.3	20.7	20.8	393.3	191.9	99.3	50.9	55.2	54.4	53.5
75,0°	17.7	17.6	17.9	18.3	18.3	18.3	419.2	216.1	66.2	48.4	52.3	52.6	49.4
77,5°	16.4	16.1	15.9	15.8	15.3	14.8	325.7	169.7	59.3	43.1	47.7	45.8	42.1
80,0°	14.6	14.4	14.2	13.6	13.1	12.8	240.2	191.3	95.9	40.4	43.0	40.2	35.1
82,5°	13.0	12.9	12.4	12.0	11.7	11.7	172.7	107.2	62.9	34.6	35.4	32.5	28.7
85,0°	11.9	11.7	11.3	11.0	11.0	11.0	56.8	56.8	47.3	32.2	28.3	26.8	25.0
87,5°	10.8	10.8	10.6	10.4	10.3	10.2	16.4	24.5	23.0	22.6	22.7	22.9	22.7
90,0°	10.5	10.4	10.2	10.2	9.9	9.8	14.0	14.1	15.8	17.5	19.3	19.3	18.8
92,5°	10.3	10.1	10.0	9.9	9.8	9.8	12.5	12.5	13.5	14.2	14.3	13.4	12.3
95,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
97,5°	10.3	10.2	10.1	10.0	10.0	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
100,0°	10.4	10.2	10.2	10.2	10.1	10.1	12.2	12.0	11.8	11.6	11.4	11.1	10.8
102,5°	10.3	10.2	10.1	10.1	10.1	10.0	12.2	12.0	11.9	11.6	11.4	11.1	10.8
105,0°	10.2	10.2	10.1	10.1	10.0	9.9	12.1	12.0	11.8	11.6	11.4	11.1	10.8
107,5°	10.2	10.1	10.1	10.1	9.9	9.9	12.0	11.9	11.7	11.6	11.3	11.0	10.8
110,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.0	11.8	11.7	11.5	11.3	11.0	10.7
112,5°	10.1	10.0	9.9	9.9	9.8	9.9	11.8	11.8	11.6	11.5	11.2	11.0	10.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0
2,5°	6.4	6.6	6.9	7.4	8.2	8.4	8.2	8.2	8.1	8.1	8.1	0.1	0.1
5,0°	20.5	21.9	22.1	22.1	21.8	21.5	21.2	21.1	21.4	21.7	21.6	0.3	0.4
7,5°	54.1	56.6	54.7	57.0	56.7	52.2	50.1	48.8	50.1	52.2	53.7	1.6	2.0
10,0°	67.9	65.0	64.1	63.9	63.1	60.4	56.1	54.6	56.8	60.3	61.2	4.3	6.3
12,5°	105.0	94.3	82.8	74.6	68.5	61.4	53.4	50.7	51.6	53.4	53.6	7.7	14.0
15,0°	117.7	106.0	96.2	86.9	80.4	70.8	61.5	55.1	52.8	52.7	53.1	11.9	25.8
17,5°	116.0	102.5	92.2	81.9	73.7	69.1	65.4	64.2	62.6	64.0	65.7	16.3	42.1
20,0°	112.3	98.0	86.1	75.6	68.2	63.7	62.0	63.9	62.1	64.8	68.0	20.7	62.8
22,5°	109.1	87.0	73.8	65.2	62.2	59.6	57.2	58.5	55.5	57.5	59.7	24.4	87.2
25,0°	95.8	75.0	64.1	59.0	56.2	55.4	51.6	52.5	50.0	51.2	52.9	27.0	114.2
27,5°	84.0	64.4	58.1	55.3	52.2	51.3	46.6	47.3	44.7	45.9	47.2	28.8	143.0
30,0°	73.6	60.7	55.1	52.7	50.0	47.6	43.0	43.7	41.5	42.2	43.6	30.6	173.6
32,5°	69.6	57.8	52.6	50.6	48.1	44.6	40.4	40.5	38.5	38.9	39.9	31.7	205.3
35,0°	62.5	53.2	51.1	49.4	46.4	42.5	38.3	37.9	35.9	36.0	36.6	33.0	238.3
37,5°	56.9	53.0	50.0	48.5	45.6	41.5	37.0	35.5	33.3	33.5	34.0	34.6	272.9
40,0°	55.3	53.0	50.4	47.5	43.1	38.8	34.7	32.8	30.8	30.7	30.8	35.3	308.2
42,5°	55.4	52.7	50.5	47.2	43.6	38.6	33.3	30.2	28.4	28.2	28.0	36.1	344.3
45,0°	57.1	53.0	50.5	47.4	42.9	37.8	32.8	29.1	26.4	26.2	25.9	36.7	381.0
47,5°	55.9	54.7	53.1	48.6	43.2	37.3	31.9	27.8	25.9	24.6	24.1	37.2	418.2
50,0°	54.3	53.0	52.0	48.5	42.9	36.7	31.1	26.8	24.5	24.8	26.3	37.7	455.9
52,5°	53.4	51.9	50.3	45.7	40.3	34.7	30.0	26.3	25.0	24.6	24.3	38.2	494.1
55,0°	52.7	50.6	48.6	43.5	39.1	34.8	30.2	25.1	21.8	21.2	20.6	38.9	533.0
57,5°	53.3	51.2	49.7	43.7	36.9	31.3	26.6	22.6	20.1	19.5	19.0	40.3	573.3
60,0°	53.3	48.2	45.6	40.4	34.8	29.8	25.5	21.8	19.4	18.8	18.1	43.0	616.3
62,5°	51.9	45.6	42.0	37.7	33.0	28.2	24.4	21.1	18.7	17.8	17.2	44.2	660.4
65,0°	51.0	43.7	38.4	34.5	30.4	26.4	22.6	19.7	17.6	16.6	16.1	44.0	704.4
67,5°	49.7	42.3	35.2	31.2	27.7	24.4	21.3	18.8	16.9	15.8	15.1	45.3	749.8
70,0°	48.6	41.0	32.4	28.6	25.5	22.8	20.2	17.9	16.2	15.0	14.1	46.3	796.1
72,5°	48.5	41.5	29.9	26.3	23.6	21.3	19.2	17.1	15.5	14.0	13.2	42.7	838.7
75,0°	44.3	38.7	27.8	24.7	22.0	20.1	19.4	18.0	16.5	15.0	14.1	34.0	872.8
77,5°	37.7	31.2	27.1	24.7	22.3	20.1	19.8	19.2	18.7	17.1	16.2	25.3	898.1
80,0°	28.5	26.9	24.9	22.8	20.8	18.9	18.2	17.7	17.8	16.4	15.8	18.6	916.7
82,5°	25.3	24.8	21.9	20.2	18.9	17.4	16.1	14.8	14.4	12.9	12.1	12.2	928.8
85,0°	23.7	22.6	18.5	16.8	15.9	15.1	14.0	12.8	12.2	11.4	10.8	8.3	937.1
87,5°	22.5	19.6	15.7	14.5	13.8	13.1	12.3	11.5	11.0	10.1	9.5	5.4	942.5
90,0°	18.9	15.3	13.2	12.3	11.4	10.8	10.4	10.0	9.6	8.3	7.5	4.1	946.6
92,5°	11.4	10.8	10.3	10.0	9.5	9.2	8.9	8.6	8.3	7.3	6.5	3.1	949.7
95,0°	10.4	10.2	9.8	9.6	9.2	9.0	8.7	8.5	8.1	7.2	6.4	2.9	952.6
97,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.6	8.2	7.2	6.4	2.9	955.5
100,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.2	6.4	2.9	958.3
102,5°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.3	6.6	2.8	961.1
105,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.8	8.6	8.3	7.3	6.7	2.8	963.9
107,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.5	8.2	7.2	6.6	2.7	966.7
110,0°	10.4	10.1	9.8	9.5	9.2	9.0	8.7	8.4	8.2	7.2	6.7	2.7	969.4
112,5°	10.3	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.0	7.2	6.7	2.6	972.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		
Maximum luminous intensity		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.7	11.6	11.5	11.3	11.0	10.8	10.6	10.4	10.2	10.2	10.1
117,5°	11.6	11.6	11.6	11.4	11.3	11.1	10.8	10.6	10.5	10.3	10.2	10.0	9.9
120,0°	11.4	11.3	11.3	11.2	11.1	10.9	10.7	10.5	10.3	10.2	10.0	9.9	9.8
122,5°	11.1	11.0	11.0	10.9	10.8	10.6	10.4	10.3	10.1	10.0	9.8	9.8	9.6
125,0°	10.7	10.8	10.7	10.6	10.5	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.4
127,5°	10.4	10.4	10.4	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.3	9.2
130,0°	10.0	10.0	9.9	9.9	9.8	9.8	9.6	9.5	9.4	9.3	9.2	9.1	9.1
132,5°	9.6	9.6	9.6	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9	8.8
135,0°	9.1	9.1	9.1	9.1	9.1	9.0	8.9	8.9	8.8	8.7	8.6	8.6	8.6
137,5°	8.6	8.6	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.4	8.4	8.4	8.3
140,0°	8.2	8.3	8.3	8.3	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.1	8.1
142,5°	7.8	7.9	8.0	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9	7.9	7.8
145,0°	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.5
147,5°	6.9	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	7.2	7.2	7.2
150,0°	6.3	6.3	6.4	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7
152,5°	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8
155,0°	4.2	4.3	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7
157,5°	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.5	3.5	3.5	3.5	3.6
160,0°	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	2.4
162,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.0	2.0	2.1
165,0°	1.6	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
167,5°	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.9	1.9	2.0	1.9
170,0°	1.4	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.0	9.9	9.8	9.8	9.8	9.8	11.7	11.7	11.5	11.4	11.2	11.0	10.6
117,5°	9.9	9.8	9.8	9.8	9.6	9.6	11.5	11.5	11.4	11.2	11.0	10.8	10.5
120,0°	9.8	9.7	9.6	9.6	9.6	9.6	11.3	11.3	11.2	11.0	10.8	10.6	10.3
122,5°	9.6	9.4	9.4	9.4	9.4	9.4	11.0	11.0	10.8	10.7	10.5	10.3	10.1
125,0°	9.4	9.3	9.2	9.2	9.2	9.2	10.6	10.6	10.5	10.4	10.2	10.0	9.8
127,5°	9.2	9.1	9.1	9.1	9.1	9.1	10.3	10.3	10.2	10.1	9.9	9.8	9.5
130,0°	9.0	8.9	8.9	8.9	8.8	8.7	9.9	9.9	9.8	9.6	9.5	9.4	9.2
132,5°	8.7	8.7	8.6	8.6	8.6	8.6	9.5	9.5	9.3	9.2	9.1	9.0	8.8
135,0°	8.5	8.4	8.4	8.4	8.4	8.4	9.0	9.0	8.8	8.7	8.6	8.4	8.3
137,5°	8.3	8.2	8.2	8.2	8.2	8.1	8.5	8.4	8.4	8.3	8.1	8.1	7.9
140,0°	8.1	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.0	7.9	7.8	7.6	7.5
142,5°	7.8	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.6	7.5	7.4	7.3	7.2
145,0°	7.6	7.5	7.5	7.5	7.5	7.5	7.4	7.3	7.2	7.1	7.1	6.9	6.9
147,5°	7.2	7.2	7.2	7.2	7.2	7.2	6.9	6.8	6.7	6.6	6.6	6.4	6.4
150,0°	6.7	6.7	6.7	6.7	6.7	6.7	6.1	6.0	6.0	5.9	5.7	5.7	5.6
152,5°	5.8	5.8	5.8	5.8	5.8	5.8	5.3	5.2	5.1	5.0	4.9	4.8	4.7
155,0°	4.8	4.8	4.8	4.8	4.8	4.7	4.2	4.1	4.0	4.0	3.9	3.8	3.7
157,5°	3.5	3.5	3.5	3.5	3.4	3.4	3.1	3.0	3.0	3.0	2.9	2.8	2.8
160,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1
162,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
165,0°	1.9	1.9	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.7	1.7	1.7	1.7
167,5°	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.5
170,0°	1.5	1.4	1.5	1.5	1.5	1.5	1.3	1.4	1.4	1.4	1.3	1.3	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.3	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.2	6.7	2.5	974.5
117,5°	10.2	9.9	9.6	9.3	9.0	8.8	8.5	8.2	7.9	7.1	6.7	2.5	977.0
120,0°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.0	6.7	2.4	979.3
122,5°	9.8	9.5	9.2	9.0	8.7	8.5	8.2	7.9	7.6	6.9	6.6	2.3	981.6
125,0°	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	6.8	6.5	2.1	983.7
127,5°	9.2	9.1	8.8	8.5	8.3	8.1	7.7	7.5	7.1	6.7	6.5	2.0	985.7
130,0°	9.0	8.7	8.5	8.3	8.1	7.8	7.5	7.2	6.9	6.6	6.4	1.9	987.6
132,5°	8.6	8.3	8.1	7.9	7.7	7.5	7.2	6.8	6.6	6.3	6.2	1.7	989.4
135,0°	8.1	7.8	7.7	7.5	7.3	7.2	6.9	6.5	6.3	6.1	6.0	1.6	991.0
137,5°	7.7	7.5	7.4	7.2	7.0	6.9	6.6	6.3	6.1	6.0	6.0	1.5	992.4
140,0°	7.3	7.1	7.1	6.9	6.8	6.4	6.4	6.0	5.9	5.8	5.8	1.3	993.8
142,5°	7.1	6.9	6.8	6.7	6.5	6.2	6.1	5.8	5.7	5.7	5.7	1.2	995.0
145,0°	6.7	6.6	6.5	6.4	6.3	6.2	5.9	5.6	5.6	5.6	5.7	1.1	996.1
147,5°	6.3	6.2	6.0	6.0	5.8	5.8	5.5	5.3	5.2	5.3	5.3	1.0	997.1
150,0°	5.5	5.4	5.4	5.2	5.1	5.0	4.8	4.6	4.6	4.6	4.6	0.8	997.9
152,5°	4.7	4.5	4.5	4.3	4.3	4.2	4.0	3.9	3.8	3.8	3.8	0.6	998.6
155,0°	3.6	3.6	3.5	3.4	3.3	3.3	3.3	3.1	3.1	3.1	3.0	0.5	999.0
157,5°	2.8	2.7	2.7	2.6	2.6	2.5	2.4	2.4	2.4	2.4	2.4	0.3	999.4
160,0°	2.1	2.1	2.1	2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.2	999.6
162,5°	1.7	1.8	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.2	999.7
165,0°	1.7	1.7	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.5	0.1	999.8
167,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
170,0°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	1.3	1.4	1.3	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565BF14HP00022 EAN: 4058352955758	LP number 59429_182
--------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption	Power consumption	Power consumption
				[W] start of lifetime	[W] end of lifetime	[W] average
100	254	254	3950	33.6	35.9	34.8
95	241	252	3748	31.3	33.5	32.4
90	229	250	3561	29.4	31.4	30.4
85	216	248	3359	27.3	29.2	28.2
80	203	246	3157	25.4	27.1	26.2
75	190	243	2955	23.5	25.1	24.3
70	178	241	2768	21.9	23.3	22.6
65	165	238	2566	20.1	21.4	20.8
60	152	235	2364	18.4	19.5	19.0
55	140	232	2177	16.8	17.9	17.4
50	127	229	1975	15.2	16.2	15.7
45	114	225	1773	13.6	14.5	14.0
40	102	221	1586	12.2	13.0	12.6
35	89	216	1384	10.7	11.3	11.0
30	76	210	1182	9.2	9.7	9.4
25	63	203	980	7.8	8.2	8.0
20	51	195	793	6.6	6.9	6.8
15	38	184	591	5.2	5.4	5.3
11	28	173	435	4.1	4.3	4.2