

## Photometric test report

Family  
Spot 11

Order number: 51SD14MBA5A  
EAN: 4058352716373

LP number  
59368\_11



**Version** reflector, cover panel, PC, clear, wide distribution  
**Lamps** LED 2700 K | CRI ≥ 90  
**Controlgear** ECG Multilumen  
**Setting** factory setting: DIP-Step=10  
**Rated values** Net luminous flux = 5550 lm  
Power consumption = 37.9 W  
Luminous efficacy = 146.4 lm/W


serial  
documentation  
23.12.2022

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 1788 cd/klm

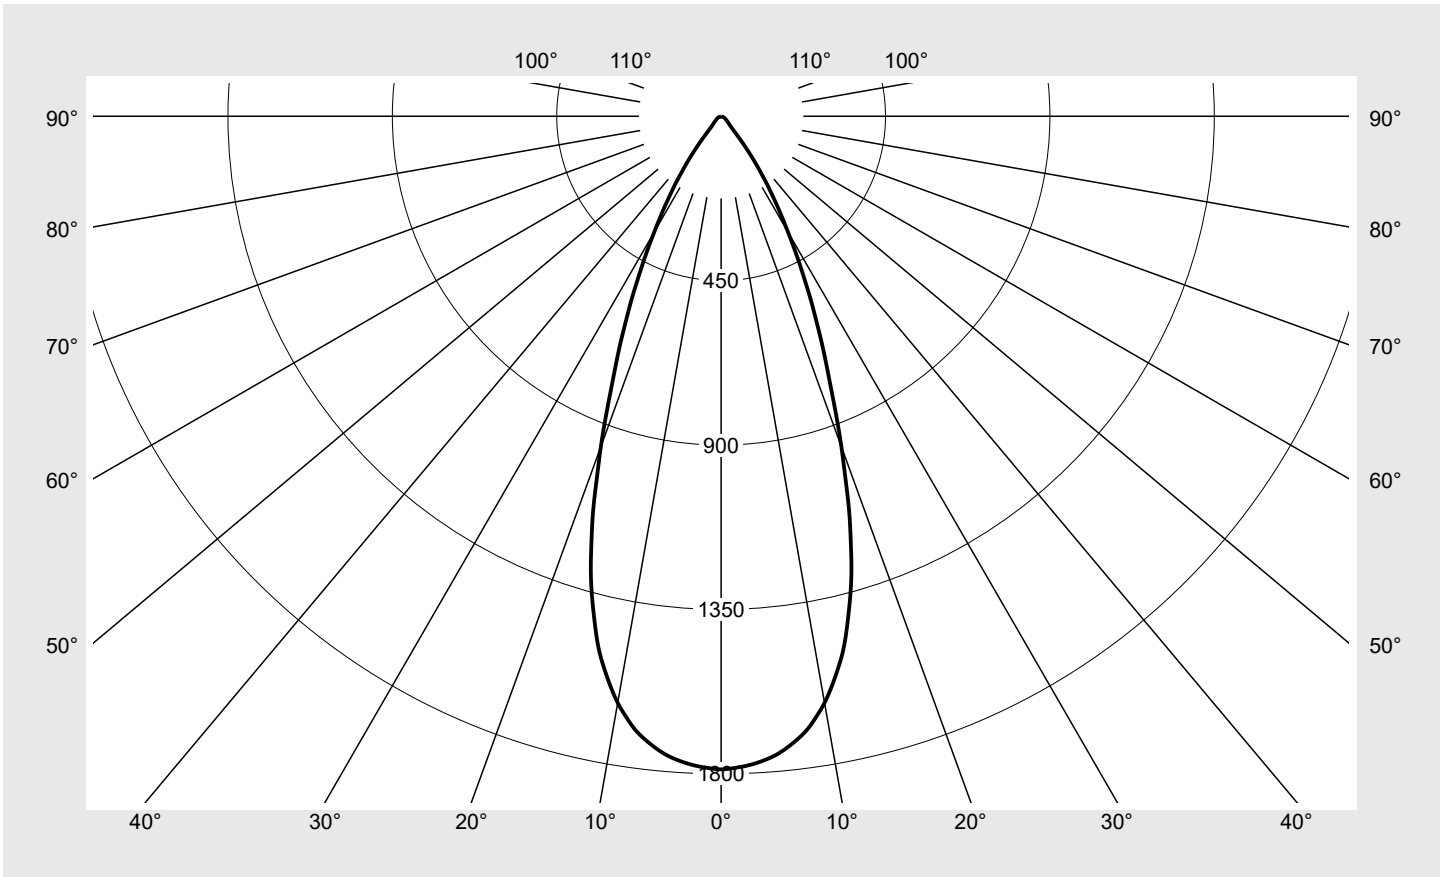

### Classifications

DIN 5040 A 7 0  
CIE N1=95 N2=98 N3=100  
N4=100 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Spot 11</b>	<b>Order number: 51SD14MBA5A</b> <b>EAN: 4058352716373</b>	<b>LP number</b> <b>59368_11</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1787.8	0.4	0.4
1°	1785.0	3.4	3.8
2°	1780.6	6.8	10.7
3°	1774.1	10.2	20.8
4°	1765.1	13.5	34.3
5°	1753.5	16.8	51.1
6°	1737.2	19.9	71.0
7°	1718.0	23.0	94.0
8°	1695.0	25.9	119.8
9°	1664.4	28.6	148.4
10°	1630.4	31.0	179.4
11°	1588.8	33.2	212.7
12°	1543.0	35.2	247.9
13°	1492.7	36.8	284.7
14°	1429.8	37.9	322.6
15°	1364.5	38.7	361.3
16°	1294.1	39.1	400.5
17°	1213.5	38.9	439.4
18°	1133.2	38.4	477.8
19°	1043.5	37.3	515.0
20°	962.6	36.1	551.1
21°	880.9	34.6	585.7
22°	803.1	33.0	618.7
23°	736.5	31.6	650.3
24°	675.3	30.1	680.4
25°	614.8	28.5	708.9
26°	561.0	27.0	735.9
27°	506.2	25.2	761.1
28°	457.2	23.5	784.6
29°	410.6	21.8	806.4
30°	366.1	20.1	826.5
31°	327.4	18.5	845.0
32°	290.6	16.9	861.9
33°	255.7	15.3	877.2
34°	225.3	13.8	891.0
35°	193.5	12.2	903.2
36°	166.5	10.7	913.9
37°	139.9	9.2	923.1
38°	114.0	7.7	930.8
39°	91.9	6.3	937.2
40°	71.2	5.0	942.2
41°	55.8	4.0	946.2
42°	45.5	3.3	949.5
43°	39.2	2.9	952.5
44°	34.9	2.7	955.1
45°	32.1	2.5	957.6
46°	29.6	2.3	960.0

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	27.8	2.2	962.2
48°	25.7	2.1	964.3
49°	24.0	2.0	966.3
50°	22.5	1.9	968.2
51°	21.0	1.8	969.9
52°	19.7	1.7	971.7
53°	18.6	1.6	973.3
54°	17.4	1.5	974.8
55°	16.5	1.5	976.3
56°	15.5	1.4	977.7
57°	14.7	1.4	979.1
58°	14.0	1.3	980.4
59°	13.3	1.2	981.6
60°	12.7	1.2	982.8
61°	12.0	1.2	984.0
62°	11.5	1.1	985.1
63°	10.9	1.1	986.2
64°	10.4	1.0	987.2
65°	9.9	1.0	988.2
66°	9.4	0.9	989.1
67°	9.0	0.9	990.0
68°	8.5	0.9	990.9
69°	8.1	0.8	991.7
70°	7.7	0.8	992.5
71°	7.3	0.8	993.3
72°	6.8	0.7	994.0
73°	6.5	0.7	994.7
74°	6.1	0.6	995.3
75°	5.7	0.6	995.9
76°	5.4	0.6	996.5
77°	5.0	0.5	997.0
78°	4.7	0.5	997.5
79°	4.4	0.5	998.0
80°	4.0	0.4	998.4
81°	3.5	0.4	998.8
82°	3.1	0.3	999.1
83°	2.5	0.3	999.4
84°	2.0	0.2	999.6
85°	1.5	0.2	999.8
86°	1.0	0.1	999.9
87°	0.6	0.1	1000.0
88°	0.2	0.0	1000.0
89°	0.1	0.0	1000.0
90°	0.1	0.0	1000.0

## Photometric test report

Family Spot 11	Order number: 51SD14MBA5A EAN: 4058352716373	LP number 59368_11
-------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.8	22.9	22.2	23.2	23.5	21.8	22.9	22.2	23.2	23.5
	3H	22.0	23.0	22.4	23.3	23.7	22.0	23.0	22.4	23.3	23.7
	4H	22.2	23.1	22.6	23.4	23.8	22.2	23.1	22.6	23.4	23.8
	6H	22.4	23.1	22.8	23.5	23.9	22.4	23.1	22.8	23.5	23.9
	8H	22.6	23.2	23.0	23.6	24.0	22.6	23.2	23.0	23.6	24.0
	12H	22.6	23.1	23.0	23.5	23.9	22.6	23.1	23.0	23.5	23.9
4H	2H	21.8	22.6	22.2	23.0	23.4	21.8	22.6	22.2	23.0	23.4
	3H	22.1	22.8	22.6	23.2	23.7	22.1	22.8	22.6	23.2	23.7
	4H	22.4	23.0	22.8	23.4	23.9	22.4	23.0	22.8	23.4	23.9
	6H	22.6	23.2	23.1	23.6	24.1	22.6	23.2	23.1	23.6	24.1
	8H	22.8	23.2	23.2	23.7	24.2	22.8	23.2	23.2	23.7	24.2
	12H	22.8	23.2	23.3	23.7	24.2	22.8	23.2	23.3	23.7	24.2
8H	4H	22.4	22.9	22.9	23.3	23.8	22.4	22.9	22.9	23.3	23.8
	6H	22.8	23.2	23.3	23.7	24.2	22.8	23.2	23.3	23.7	24.2
	8H	22.9	23.3	23.5	23.8	24.3	22.9	23.3	23.5	23.8	24.3
	12H	23.0	23.3	23.6	23.8	24.4	23.0	23.3	23.6	23.8	24.4
12H	4H	22.4	22.8	22.9	23.3	23.8	22.4	22.8	22.9	23.3	23.8
	6H	22.8	23.1	23.3	23.6	24.1	22.8	23.1	23.3	23.6	24.1
	8H	23.0	23.3	23.5	23.8	24.3	23.0	23.3	23.5	23.8	24.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
-----------------	---------------------------------	--------------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	51448.7
50°	39600.2
55°	32532.3
60°	28678.1
65°	26513.1
70°	25401.7
75°	24922.9
80°	25938.4
85°	18967.3


**Photometric test report**

<b>Family</b> <b>Spot 11</b>	<b>Order number: 51SD14MBA5A</b> <b>EAN: 4058352716373</b>	<b>LP number</b> <b>59368_11</b>
---------------------------------	---	-------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

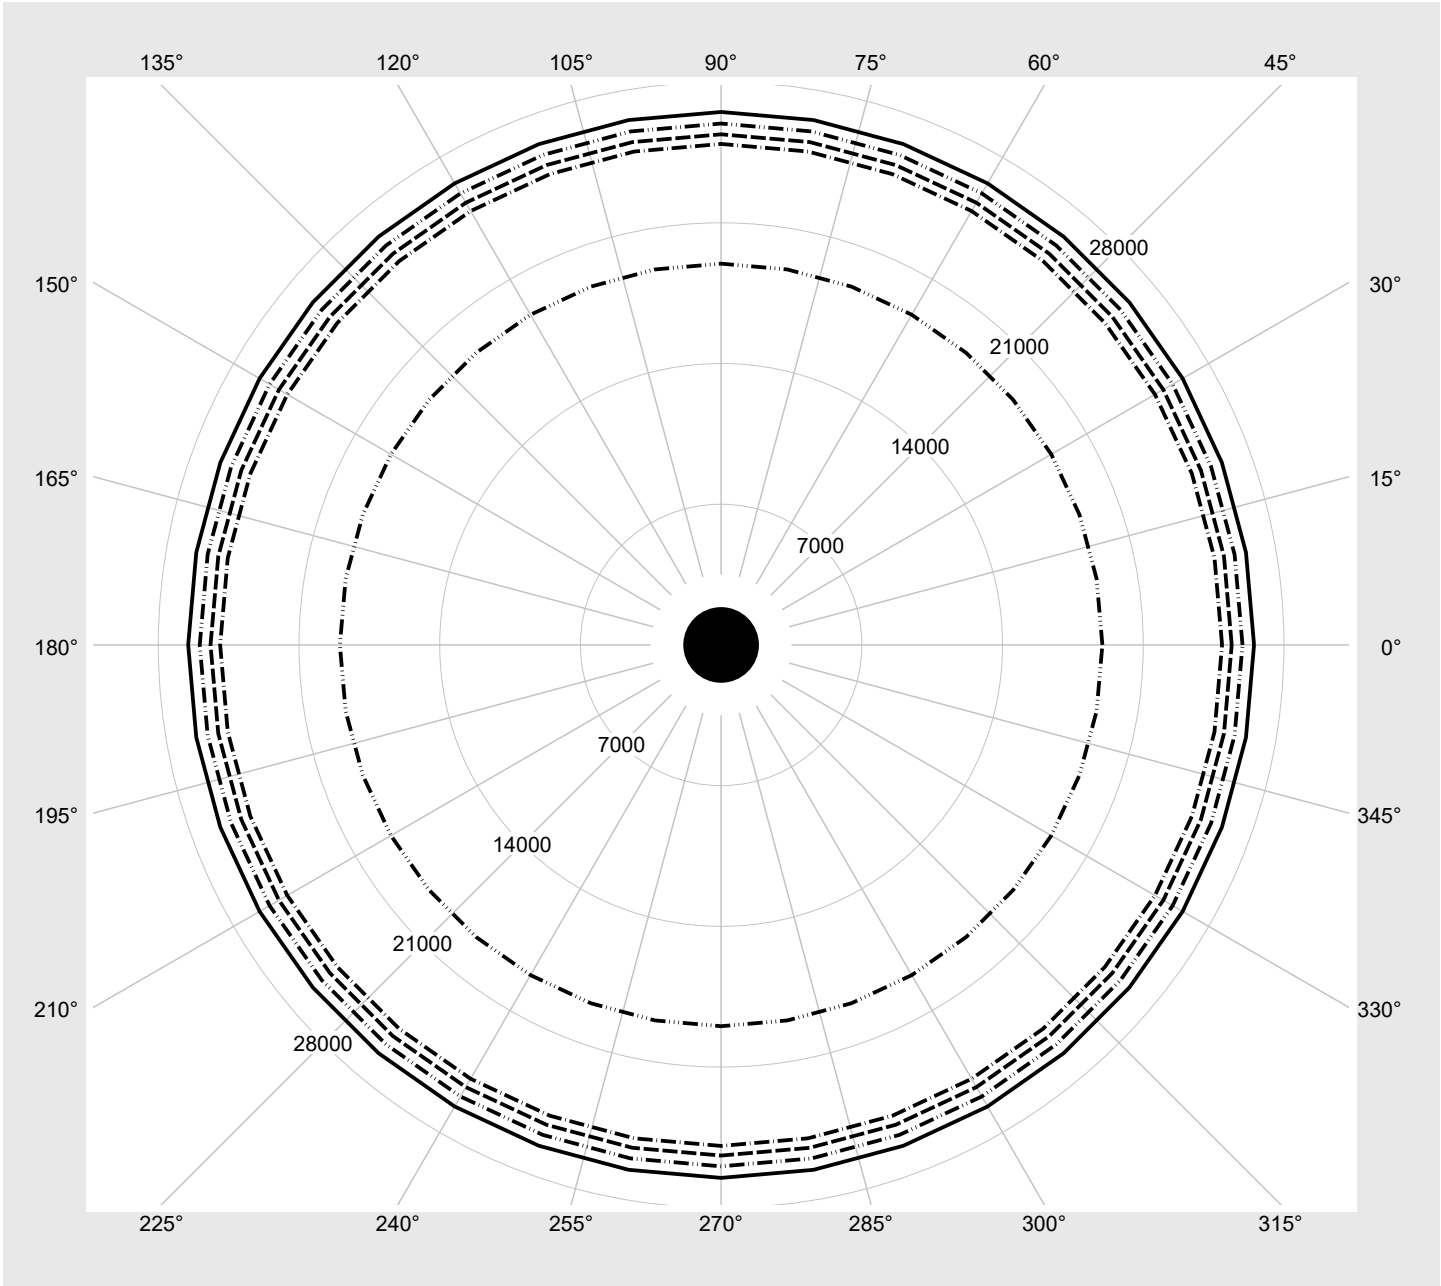

## Photometric test report

Family <b>Spot 11</b>	Order number: <b>51SD14MBA5A</b> EAN: <b>4058352716373</b>	LP number <b>59368_11</b>
--------------------------	---	------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	7210	50.7
14	ON	ON	ON	OFF	6920	47.9
13	ON	ON	OFF	ON	6550	45.3
12	ON	ON	OFF	OFF	6240	43.0
11	ON	OFF	ON	ON	5880	40.2
10	ON	OFF	ON	OFF	5550	37.9
9	ON	OFF	OFF	ON	5180	35.5
8	ON	OFF	OFF	OFF	4900	33.2
7	OFF	ON	ON	ON	4610	31.1
6	OFF	ON	ON	OFF	4300	28.8
5	OFF	ON	OFF	ON	3960	26.3
4	OFF	ON	OFF	OFF	3640	24.0
3	OFF	OFF	ON	ON	3250	21.3
2	OFF	OFF	ON	OFF	2920	19.1
1	OFF	OFF	OFF	ON	2550	16.6
0	OFF	OFF	OFF	OFF	2190	14.3