

## Photometric test report

Family  
**LANTERN LED**

Order number: **5XA5255EF14HP**  
EAN: **4058352834060**

LP number  
**58714\_18**



**Version** post-top- or mounting to wall arm  
**Optic** asymmetric, wide distribution (ST1.2a)  
**Cover** cover transparent, PMMA  
**Lamps** LED 3000 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 4730 lm  
Power consumption = 33.6 W  
Luminous efficacy = 140.8 lm/W

serial  
documentation  
24.05.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 787 cd/klm

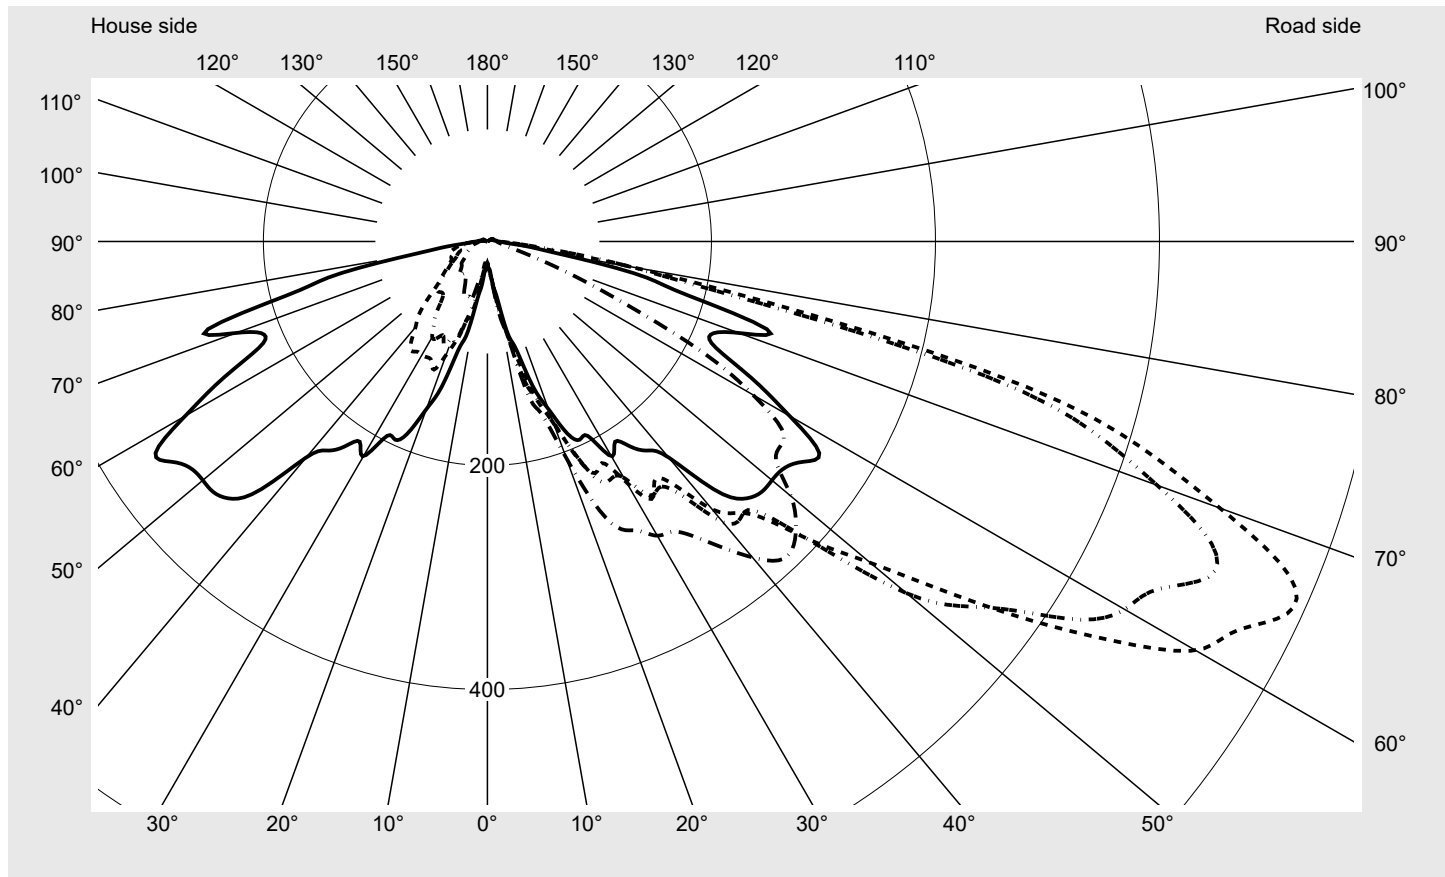

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	98.0%
Eta 90° - 180°	2.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G2
Imax 70°	696.0
Imax 80°	140.1
Imax 90°	10.7
Imax >90°	9.6
Imax >95°	7.3


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>LANTERN LED</b>	<b>Order number: 5XA5255EF14HP</b> <b>EAN: 4058352834060</b>	<b>LP number</b> <b>58714_18</b>
-------------------------------------	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**      **siteco**

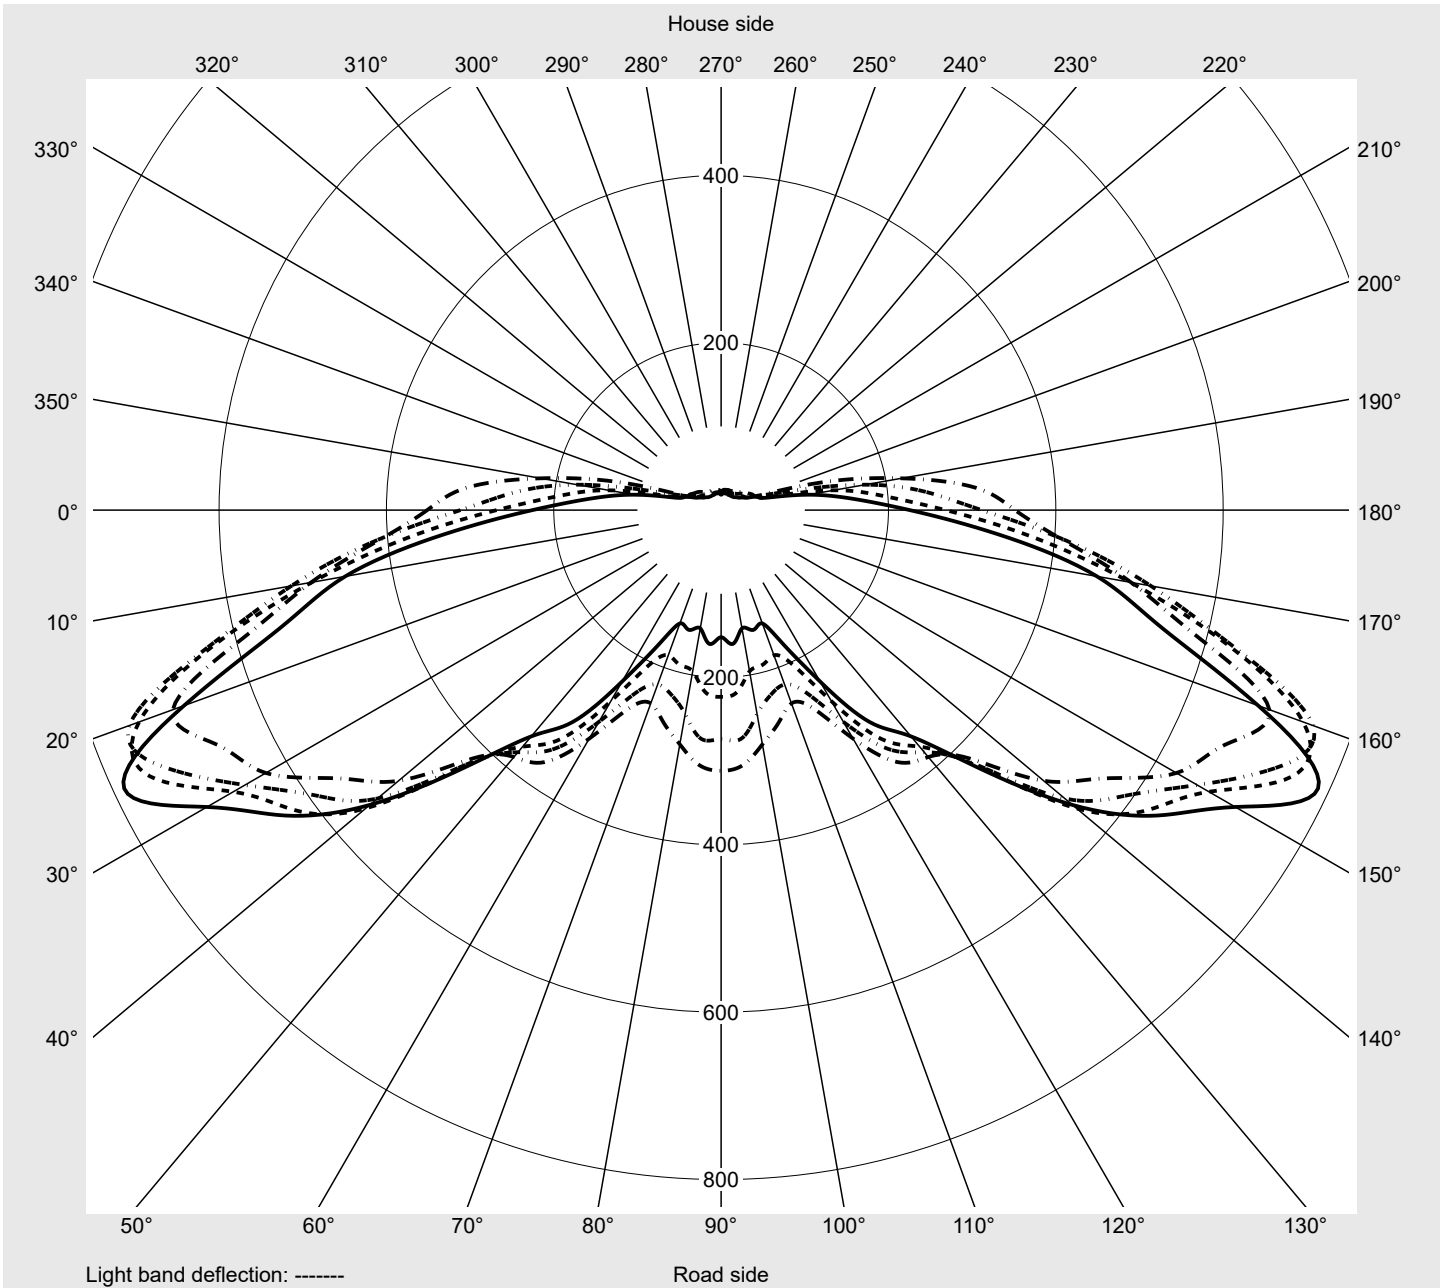

## Photometric test report

Family <b>LANTERN LED</b>	Order number: <b>5XA5255EF14HP</b> EAN: <b>4058352834060</b>	LP number <b>58714_18</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
2,5°	24.9	23.9	24.4	23.7	24.1	23.5	24.1	23.9	24.6	24.6	25.1	24.7	25.2
5,0°	25.9	27.5	28.8	29.3	30.7	30.0	30.7	29.9	29.7	29.0	30.0	29.3	30.5
7,5°	40.6	40.1	42.1	40.6	40.6	40.8	40.9	40.9	41.5	40.9	42.0	39.9	44.9
10,0°	53.2	50.2	55.1	58.0	61.8	63.0	69.1	66.0	71.7	69.9	69.9	67.6	67.9
12,5°	84.8	90.8	101.3	95.5	100.0	89.4	89.1	88.9	91.1	94.2	97.4	93.7	100.1
15,0°	100.1	116.9	123.7	122.0	113.1	115.5	129.5	133.8	130.7	130.7	130.7	118.4	118.9
17,5°	136.5	134.9	144.7	140.4	150.1	149.8	146.9	137.3	143.1	162.2	163.1	149.8	154.6
20,0°	159.2	167.7	178.3	175.9	174.9	171.6	173.0	165.8	168.6	175.7	190.7	178.4	185.1
22,5°	184.9	198.2	205.4	203.9	211.9	208.5	206.6	193.8	190.7	186.6	198.2	209.7	213.1
25,0°	195.2	196.5	201.6	212.2	214.1	228.1	235.4	231.3	234.4	215.3	204.9	208.5	219.2
27,5°	196.5	202.5	216.7	216.3	216.7	223.0	239.0	248.9	263.9	245.0	221.4	210.7	229.6
30,0°	221.4	230.0	233.7	238.7	244.6	248.2	243.4	248.7	277.4	281.5	257.3	225.2	240.7
32,5°	212.1	230.8	245.7	254.7	264.1	272.6	268.5	259.8	276.0	290.4	276.2	246.9	257.8
35,0°	224.0	229.5	238.0	250.8	250.6	260.3	267.8	266.0	274.5	285.1	298.9	285.8	283.2
37,5°	235.3	232.2	223.7	244.1	251.8	273.8	286.3	292.6	308.4	313.1	313.2	319.9	317.7
40,0°	251.6	255.6	264.8	264.6	294.3	312.0	326.9	314.8	329.6	339.2	319.9	329.8	338.3
42,5°	301.3	302.1	317.8	307.8	324.0	328.7	334.7	337.4	332.2	352.8	336.9	324.5	345.0
45,0°	324.7	330.8	360.5	358.1	366.8	349.9	340.7	334.7	349.9	361.7	356.2	340.9	357.4
47,5°	331.5	351.9	410.6	409.1	417.6	397.8	403.8	374.3	377.2	359.6	349.2	347.7	348.9
50,0°	331.6	369.4	450.6	441.3	479.7	446.3	488.6	457.6	420.0	386.8	371.2	342.6	334.5
52,5°	333.2	372.4	460.5	477.5	542.5	511.1	534.8	507.0	454.7	409.4	390.0	353.3	318.5
55,0°	343.1	386.2	464.9	526.6	619.3	587.9	574.2	531.6	476.7	416.3	390.0	361.0	314.1
57,5°	351.3	410.1	497.5	591.8	697.2	664.0	628.3	558.9	503.3	419.7	385.2	367.6	315.3
60,0°	311.5	413.0	521.5	636.0	752.5	730.0	657.0	593.9	536.2	429.4	377.7	348.5	292.2
62,5°	268.4	375.2	496.6	629.3	740.2	753.0	673.2	624.2	554.6	432.6	369.0	333.9	263.7
65,0°	225.5	332.5	456.2	546.3	683.1	787.2	709.5	636.3	548.1	436.2	353.0	309.0	236.5
67,5°	216.3	327.0	442.0	500.5	642.7	773.3	698.1	593.5	536.9	412.7	326.4	282.0	205.7
70,0°	238.7	337.4	431.3	497.8	592.2	696.0	636.3	550.2	463.7	376.7	291.6	250.8	169.7
72,5°	262.7	360.0	404.3	484.0	575.6	612.5	568.1	481.9	366.8	306.2	233.7	203.5	137.2
75,0°	184.1	298.4	330.1	390.0	472.4	491.7	452.4	348.2	243.6	213.8	196.9	182.7	127.6
77,5°	140.2	207.8	216.2	262.2	276.9	275.0	230.1	181.7	147.4	136.0	142.1	144.7	100.8
80,0°	70.8	92.1	109.4	140.1	118.1	130.2	128.6	120.6	98.6	77.3	55.8	73.5	42.0
82,5°	39.8	45.0	48.3	67.7	48.5	50.5	64.8	82.9	62.6	46.7	28.5	21.2	13.8
85,0°	19.3	22.5	20.8	25.4	18.6	25.9	32.1	40.1	24.1	20.6	13.8	12.6	11.1
87,5°	14.0	14.3	13.6	15.0	14.5	17.1	17.2	16.5	14.3	13.5	10.9	10.6	9.7
90,0°	10.1	10.4	10.4	10.7	10.4	10.6	9.9	9.9	9.6	9.6	9.0	9.0	8.5
92,5°	8.9	9.2	9.0	9.6	9.2	9.4	8.9	8.9	8.5	8.5	8.2	8.2	8.2
95,0°	7.5	7.8	7.8	8.2	8.2	8.2	8.0	8.0	7.7	7.7	7.5	7.7	7.5
97,5°	6.5	6.8	6.8	7.0	7.2	7.3	7.0	7.2	7.2	7.2	6.8	7.2	7.0
100,0°	5.8	5.8	5.8	6.1	6.1	6.1	6.1	6.3	6.1	6.5	6.3	6.5	6.5
102,5°	5.1	5.1	5.1	5.5	5.5	5.5	5.6	5.8	5.8	5.8	5.8	5.8	6.0
105,0°	4.8	4.8	4.8	4.9	5.1	5.3	5.3	5.5	5.5	5.5	5.5	5.8	5.8
107,5°	4.6	4.8	4.8	4.8	4.9	5.1	5.1	5.3	5.3	5.5	5.5	5.5	5.6
110,0°	4.6	4.6	4.8	4.8	4.9	4.9	5.3	5.3	5.3	5.3	5.5	5.5	5.5
112,5°	4.4	4.6	4.6	4.6	4.9	4.9	5.1	5.3	5.3	5.3	5.5	5.3	5.5

## Photometric test report

<b>Family</b> <b>LANTERN LED</b>	<b>Order number: 5XA5255EF14HP</b> <b>EAN: 4058352834060</b>	<b>LP number</b> <b>58714_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
2,5°	24.7	25.2	24.6	24.9	24.6	24.9	24.9	24.4	24.2	22.9	22.7	21.2	21.0
5,0°	30.4	31.2	30.2	31.2	29.9	31.0	25.1	24.1	23.4	22.7	22.2	21.7	21.3
7,5°	44.4	45.9	41.5	43.2	44.5	45.7	40.3	34.0	35.1	30.9	33.1	28.1	30.7
10,0°	63.3	63.1	60.7	65.5	66.0	71.7	55.6	58.5	55.4	56.8	47.1	42.1	38.0
12,5°	91.8	97.1	90.6	94.5	91.4	92.1	73.7	76.4	72.0	73.9	67.9	59.0	63.3
15,0°	115.5	121.8	115.8	132.6	125.7	143.6	98.1	87.3	83.3	75.1	73.0	73.9	71.0
17,5°	154.6	167.5	174.4	163.9	151.8	161.7	126.1	121.8	109.0	106.1	92.6	94.0	81.5
20,0°	179.1	189.0	190.7	200.3	198.1	205.4	147.6	130.9	130.5	118.4	107.6	91.4	88.5
22,5°	214.4	220.9	227.9	245.5	246.0	257.9	171.5	166.8	149.6	133.2	123.7	100.0	84.4
25,0°	232.7	244.0	258.6	279.8	284.0	283.5	176.7	170.1	156.6	145.2	118.1	93.0	77.8
27,5°	248.4	257.1	274.5	293.8	292.2	291.0	191.8	173.3	139.9	126.8	116.5	97.2	79.3
30,0°	263.7	273.1	287.3	300.3	300.3	303.3	193.3	167.4	140.4	130.9	117.0	98.6	72.5
32,5°	279.4	298.6	304.2	307.6	305.5	307.1	190.2	167.5	155.9	137.5	116.7	89.1	59.7
35,0°	295.5	312.7	317.5	318.9	317.1	321.4	225.7	194.1	169.1	148.9	118.9	81.2	54.6
37,5°	305.2	322.8	327.0	338.0	340.7	344.3	232.4	211.9	171.8	151.2	111.4	68.2	52.2
40,0°	322.3	336.1	344.4	357.2	363.0	368.2	245.2	206.4	170.6	138.5	99.8	61.6	52.5
42,5°	345.8	351.8	358.3	370.5	379.2	385.9	291.4	237.0	185.8	147.7	92.0	61.4	56.6
45,0°	365.4	354.0	365.8	377.2	385.7	385.9	321.8	260.3	196.2	149.6	80.0	62.8	58.0
47,5°	357.1	345.0	363.5	369.7	375.2	373.6	328.9	267.0	202.8	133.1	66.0	59.7	54.4
50,0°	334.9	320.7	341.2	347.3	356.7	353.8	325.3	262.6	198.9	107.1	56.1	53.9	49.5
52,5°	301.1	291.0	317.5	323.6	329.8	325.5	322.9	254.4	192.3	85.5	50.8	48.3	44.7
55,0°	279.1	264.8	290.9	303.0	315.8	319.0	325.3	246.2	172.6	66.7	46.1	43.2	39.9
57,5°	261.7	245.8	263.7	284.2	305.5	311.5	305.7	218.9	131.9	56.3	42.3	39.2	36.5
60,0°	240.7	221.8	228.8	247.5	274.3	273.6	246.7	174.9	89.9	51.9	38.7	35.5	33.3
62,5°	204.6	184.6	191.4	195.7	218.2	223.1	194.5	136.5	62.4	46.6	36.2	31.9	29.5
65,0°	177.9	144.2	148.3	143.5	160.5	151.8	157.1	105.9	57.8	46.2	35.5	30.0	25.9
67,5°	144.5	106.5	103.4	99.1	106.6	97.9	149.4	91.1	65.5	49.5	34.6	28.5	23.5
70,0°	118.9	81.0	63.6	58.5	64.8	60.1	163.3	95.4	68.2	48.1	32.2	26.4	21.2
72,5°	91.6	63.1	40.6	35.0	35.8	34.8	152.9	92.1	62.6	41.6	32.4	25.4	20.3
75,0°	70.3	36.2	28.7	23.5	23.5	22.2	95.2	66.4	53.4	37.0	33.3	25.8	20.8
77,5°	48.8	22.5	20.5	17.2	17.2	16.4	69.8	51.7	45.2	35.8	30.2	25.8	21.5
80,0°	20.6	14.2	14.0	13.3	13.6	13.3	49.5	43.0	38.0	33.6	27.3	24.4	20.5
82,5°	12.3	10.9	10.9	10.9	11.1	10.9	29.5	29.9	27.8	24.6	22.9	20.8	17.7
85,0°	10.2	9.9	9.9	9.9	9.9	9.9	18.4	20.6	22.2	22.7	19.6	17.9	15.5
87,5°	9.2	9.2	9.2	9.0	9.2	8.9	14.0	15.4	14.8	15.5	13.5	13.6	12.3
90,0°	8.5	8.5	8.5	8.5	8.5	8.5	10.1	9.9	9.6	9.6	9.4	9.0	9.0
92,5°	8.2	7.8	8.2	8.2	8.2	8.2	8.5	8.7	8.2	8.2	7.8	8.0	7.7
95,0°	7.5	7.5	7.7	7.7	7.8	7.8	7.3	7.2	6.8	6.8	6.5	6.5	6.3
97,5°	7.2	6.8	7.2	7.2	7.2	7.2	6.3	6.3	6.1	5.8	5.6	5.5	5.3
100,0°	6.5	6.5	6.5	6.5	6.5	6.5	5.5	5.5	5.1	5.1	4.8	4.8	4.6
102,5°	6.1	6.0	6.1	6.0	6.1	6.1	5.1	4.8	4.8	4.8	4.4	4.4	4.1
105,0°	5.8	5.8	5.8	5.8	5.8	5.8	4.8	4.8	4.4	4.4	4.3	4.1	3.9
107,5°	5.5	5.6	5.5	5.5	5.6	5.8	4.6	4.4	4.4	4.1	4.1	3.9	3.8
110,0°	5.5	5.5	5.5	5.6	5.5	5.5	4.4	4.4	4.3	4.1	4.1	3.9	3.8
112,5°	5.5	5.5	5.5	5.5	5.5	5.5	4.4	4.4	4.1	4.1	3.9	3.8	3.4

## Photometric test report

Family <b>LANTERN LED</b>	Order number: <b>5XA5255EF14HP</b> EAN: <b>4058352834060</b>	LP number <b>58714_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	0.0	0.0
2,5°	20.6	20.5	20.5	20.3	20.3	20.5	20.5	20.5	20.5	20.3	20.5	0.3	0.3
5,0°	20.8	20.5	20.3	20.1	20.1	20.1	20.1	20.0	20.0	20.0	20.1	0.6	0.9
7,5°	27.0	27.8	24.4	25.1	23.5	23.0	21.8	22.9	21.8	22.0	21.8	1.3	2.2
10,0°	35.7	35.8	36.2	35.0	34.5	30.7	32.6	33.3	33.4	38.2	34.5	2.5	4.7
12,5°	61.9	57.5	50.8	50.3	46.6	50.2	48.6	47.3	41.8	39.1	37.2	4.5	9.2
15,0°	72.2	61.2	59.9	59.0	56.6	53.4	43.5	45.2	51.5	53.7	53.2	6.7	15.9
17,5°	75.4	70.5	61.9	59.2	56.8	55.8	55.8	52.2	53.4	52.9	52.2	9.5	25.4
20,0°	78.5	65.5	58.9	56.0	56.1	55.3	51.7	48.6	50.7	49.3	52.9	12.3	37.7
22,5°	67.7	54.3	52.4	51.0	51.4	51.2	51.0	47.9	49.1	52.9	53.2	15.7	53.4
25,0°	63.5	51.7	49.5	48.5	47.9	48.8	50.3	47.3	46.7	49.0	49.1	18.4	71.8
27,5°	61.9	51.0	48.8	47.8	46.4	45.6	46.2	44.0	43.0	43.2	43.0	20.6	92.4
30,0°	58.5	52.0	49.1	48.8	45.4	44.2	44.0	40.9	39.1	39.6	38.9	23.5	115.9
32,5°	49.0	48.8	48.8	49.1	47.3	45.0	42.3	39.8	36.3	36.3	35.5	26.1	142.0
35,0°	49.8	47.8	47.9	47.3	45.7	43.7	41.6	39.9	36.2	36.0	34.5	28.8	170.7
37,5°	50.2	47.3	44.7	43.7	44.9	42.7	42.0	40.8	37.7	38.4	36.5	31.8	202.6
40,0°	50.0	46.9	43.7	41.5	39.9	39.2	40.1	39.6	38.9	40.3	39.2	35.5	238.1
42,5°	50.7	46.7	43.8	41.5	39.9	38.4	37.5	36.9	36.5	37.0	35.8	39.8	278.0
45,0°	52.4	47.1	43.3	40.8	39.2	37.7	36.7	35.8	34.1	34.0	32.8	43.7	321.7
47,5°	50.2	45.0	41.5	38.7	37.5	36.0	35.5	34.3	32.8	32.2	31.0	47.1	368.8
50,0°	46.1	42.0	38.6	35.8	34.8	33.3	32.9	32.1	31.2	30.4	30.0	50.3	419.1
52,5°	41.5	37.5	35.0	32.6	31.7	30.7	30.4	29.5	28.8	27.6	27.0	52.7	471.8
55,0°	37.2	33.6	31.2	29.0	28.7	27.8	27.8	27.0	26.4	25.4	24.2	55.2	527.0
57,5°	34.0	30.7	28.5	26.4	26.1	25.6	25.6	25.1	24.7	23.9	22.5	57.9	584.9
60,0°	30.7	27.5	25.8	24.2	24.2	23.7	23.9	23.5	23.2	22.5	21.2	58.6	643.5
62,5°	27.5	24.4	23.2	22.3	22.2	22.0	22.2	22.0	21.8	21.2	20.1	56.7	700.2
65,0°	23.9	21.8	21.0	20.5	20.5	20.1	20.6	20.5	20.5	19.6	18.4	53.7	754.0
67,5°	21.5	19.8	19.3	18.8	18.9	18.6	19.1	18.9	18.9	18.6	17.1	50.7	804.7
70,0°	19.8	18.3	17.7	17.2	17.4	17.2	17.6	17.6	17.7	17.2	16.0	47.2	851.8
72,5°	18.4	17.2	16.5	16.0	16.2	16.2	16.5	16.5	16.4	16.2	14.7	42.7	894.5
75,0°	18.1	16.2	15.4	14.8	15.2	15.0	15.2	15.2	15.4	15.0	13.6	34.0	928.5
77,5°	17.9	15.7	14.3	13.8	13.8	13.8	13.8	13.8	14.0	13.6	12.6	22.5	951.0
80,0°	17.7	15.2	13.6	13.0	12.8	12.5	12.5	12.1	12.5	12.1	10.9	12.9	963.9
82,5°	16.2	14.0	12.8	11.8	11.6	11.1	11.3	11.1	10.9	10.6	9.6	7.4	971.3
85,0°	14.0	12.5	11.6	10.7	10.6	10.4	10.4	10.1	10.2	9.9	8.5	4.5	975.8
87,5°	12.3	10.7	10.4	9.7	9.7	9.6	9.6	9.4	9.6	9.2	7.8	3.3	979.1
90,0°	9.0	9.0	8.9	8.7	8.7	8.7	8.7	8.7	8.5	8.5	7.2	2.5	981.6
92,5°	7.7	7.3	7.7	7.2	7.5	7.2	7.5	7.2	7.2	6.8	6.1	2.2	983.9
95,0°	6.1	6.0	6.0	5.8	5.8	5.6	5.8	5.5	5.8	5.3	4.8	1.9	985.8
97,5°	5.3	5.1	5.1	4.8	4.8	4.6	4.8	4.6	4.4	4.3	4.1	1.7	987.4
100,0°	4.4	4.4	4.3	4.1	4.1	3.9	3.9	3.8	3.8	3.8	3.4	1.4	988.9
102,5°	4.1	3.9	3.8	3.8	3.8	3.4	3.4	3.4	3.4	3.4	3.1	1.3	990.2
105,0°	3.8	3.8	3.6	3.4	3.4	3.4	3.4	3.2	3.1	3.1	3.1	1.2	991.4
107,5°	3.8	3.6	3.4	3.4	3.2	3.1	3.1	3.1	3.1	3.1	3.1	1.2	992.6
110,0°	3.6	3.4	3.4	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.1	1.1	993.7
112,5°	3.4	3.4	3.1	3.1	3.1	3.1	3.1	3.2	3.1	3.1	3.1	1.1	994.8

## Photometric test report

<b>Family</b> <b>LANTERN LED</b>	<b>Order number: 5XA5255EF14HP</b> <b>EAN: 4058352834060</b>	<b>LP number</b> <b>58714_18</b>
-------------------------------------	---	-------------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	4.3	4.6	4.6	4.6	4.8	4.8	4.9	5.1	5.3	5.5	5.5	5.3	5.3
117,5°	4.1	4.3	4.4	4.6	4.6	4.8	4.9	5.1	5.3	5.3	5.3	5.3	5.3
120,0°	3.6	3.9	4.1	4.3	4.1	4.4	4.6	4.9	4.9	4.9	4.9	5.1	4.8
122,5°	2.7	3.2	3.1	3.4	3.4	3.6	3.8	4.1	4.1	4.1	4.1	4.1	3.9
125,0°	1.7	2.2	2.2	2.4	2.4	2.6	2.7	2.9	2.9	3.1	2.7	2.9	2.6
127,5°	1.0	1.4	1.4	1.7	1.5	1.7	1.9	2.2	2.2	2.2	2.0	1.9	1.9
130,0°	1.0	1.2	1.2	1.4	1.4	1.5	1.7	1.9	1.9	1.9	1.7	1.7	1.5
132,5°	0.7	0.9	1.0	1.0	1.2	1.4	1.4	1.5	1.7	1.5	1.5	1.4	1.2
135,0°	0.3	0.7	0.7	0.9	1.0	1.0	1.2	1.5	1.5	1.4	1.5	1.4	1.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LANTERN LED</b>	<b>Order number: 5XA5255EF14HP</b> <b>EAN: 4058352834060</b>	<b>LP number</b> <b>58714_18</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	5.3	5.5	5.5	5.5	5.5	5.5	4.1	4.1	3.9	3.8	3.8	3.4	3.4
117,5°	5.3	5.1	5.1	5.1	5.1	5.1	4.1	3.8	3.8	3.4	3.4	3.4	3.1
120,0°	4.9	4.8	4.8	4.8	4.8	4.8	3.4	3.4	3.1	3.1	3.1	3.1	2.7
122,5°	4.1	3.9	3.9	3.8	3.9	3.8	2.7	2.7	2.4	2.4	2.4	2.4	2.2
125,0°	2.7	2.4	2.6	2.4	2.4	2.4	1.7	1.7	1.7	1.7	1.5	1.5	1.4
127,5°	1.7	1.5	1.5	1.4	1.4	1.4	1.2	1.2	1.0	1.0	1.0	1.0	1.0
130,0°	1.5	1.4	1.2	1.2	1.2	1.0	1.0	1.0	1.0	1.0	0.9	1.0	1.0
132,5°	1.2	1.0	0.9	0.9	0.9	0.7	0.9	0.7	0.7	0.7	0.7	0.7	0.7
135,0°	1.0	0.7	0.7	0.5	0.7	0.7	0.5	0.5	0.5	0.5	0.5	0.5	0.5
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.4	3.1	3.1	3.1	3.1	3.1	3.1	3.2	3.1	3.1	3.1	1.1	995.9
117,5°	3.1	3.1	2.9	2.9	3.1	3.1	3.1	2.9	3.1	3.1	3.1	1.0	996.9
120,0°	2.7	2.6	2.7	2.7	2.7	2.9	2.7	2.9	2.9	3.1	3.1	0.9	997.8
122,5°	2.0	2.0	2.0	2.0	2.2	2.4	2.4	2.6	2.7	2.7	3.1	0.7	998.5
125,0°	1.4	1.4	1.4	1.4	1.7	1.7	1.9	2.0	2.2	2.6	2.7	0.5	999.0
127,5°	1.0	1.0	1.0	1.2	1.4	1.4	1.7	1.9	2.0	2.4	2.4	0.3	999.3
130,0°	0.9	0.9	1.0	1.2	1.2	1.5	1.7	1.9	2.0	2.4	2.4	0.3	999.6
132,5°	0.7	0.7	0.7	0.9	1.2	1.2	1.5	1.9	1.9	2.2	2.4	0.2	999.8
135,0°	0.5	0.5	0.7	0.9	0.9	1.2	1.5	1.7	1.9	2.2	2.4	0.2	1000.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> <b>LANTERN LED</b>	<b>Order number: 5XA5255EF14HP</b> <b>EAN: 4058352834060</b>	<b>LP number</b> <b>58714_18</b>
-------------------------------------	---	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4730	33.6	35.9	34.8
95	241	252	4488	31.3	33.5	32.4
90	229	250	4264	29.4	31.4	30.4
85	216	248	4022	27.3	29.2	28.2
80	203	246	3780	25.4	27.1	26.2
75	190	243	3538	23.5	25.1	24.3
70	178	241	3315	21.9	23.3	22.6
65	165	238	3073	20.1	21.4	20.8
60	152	235	2831	18.4	19.5	19.0
55	140	232	2607	16.8	17.9	17.4
50	127	229	2365	15.2	16.2	15.7
45	114	225	2123	13.7	14.5	14.1
40	102	221	1899	12.2	13.0	12.6
35	89	216	1657	10.7	11.3	11.0
30	76	210	1415	9.2	9.7	9.4
25	63	203	1173	7.8	8.2	8.0
20	51	195	950	6.6	6.9	6.8
15	38	184	708	5.2	5.5	5.4
11	28	173	521	4.1	4.4	4.2