

Photometric test report

Family
Floodlight 20 mini LED

Order number: 5XA7672B1B3AC
EAN: 4058352220818

LP number
58555_5



Version design bracket
Optic symmetric distribution RS17
Cover toughened safety glass
Lamps 1 x LED 3000K / CRI ≥ 80
 (unbekannt LED 3000K / CRI = 80)
Controlgear ECG-DALI
Rated values Net luminous flux = 5350 lm
 Power consumption = 51.0 W
 Luminous efficacy = 104.9 lm/W


serial
documentation
25.08.2021

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 2095 cd/klm

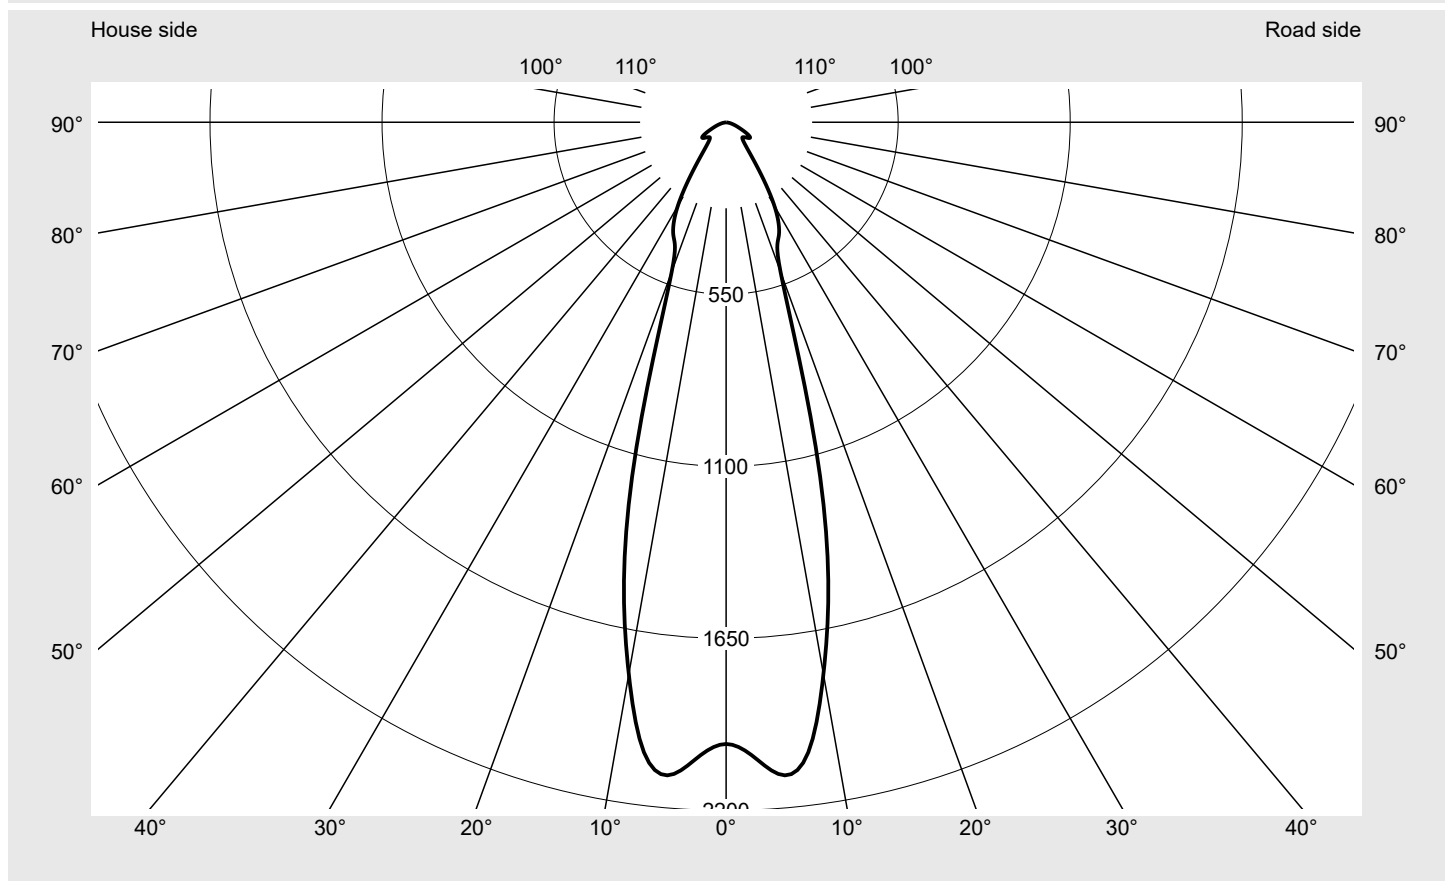

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	33.2
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B1B3AC EAN: 4058352220818	LP number 58555_5
---	---	-----------------------------



Envelope curve in cd/klm **KMK 5°** **KMK 2.5°** **KMK 0°**

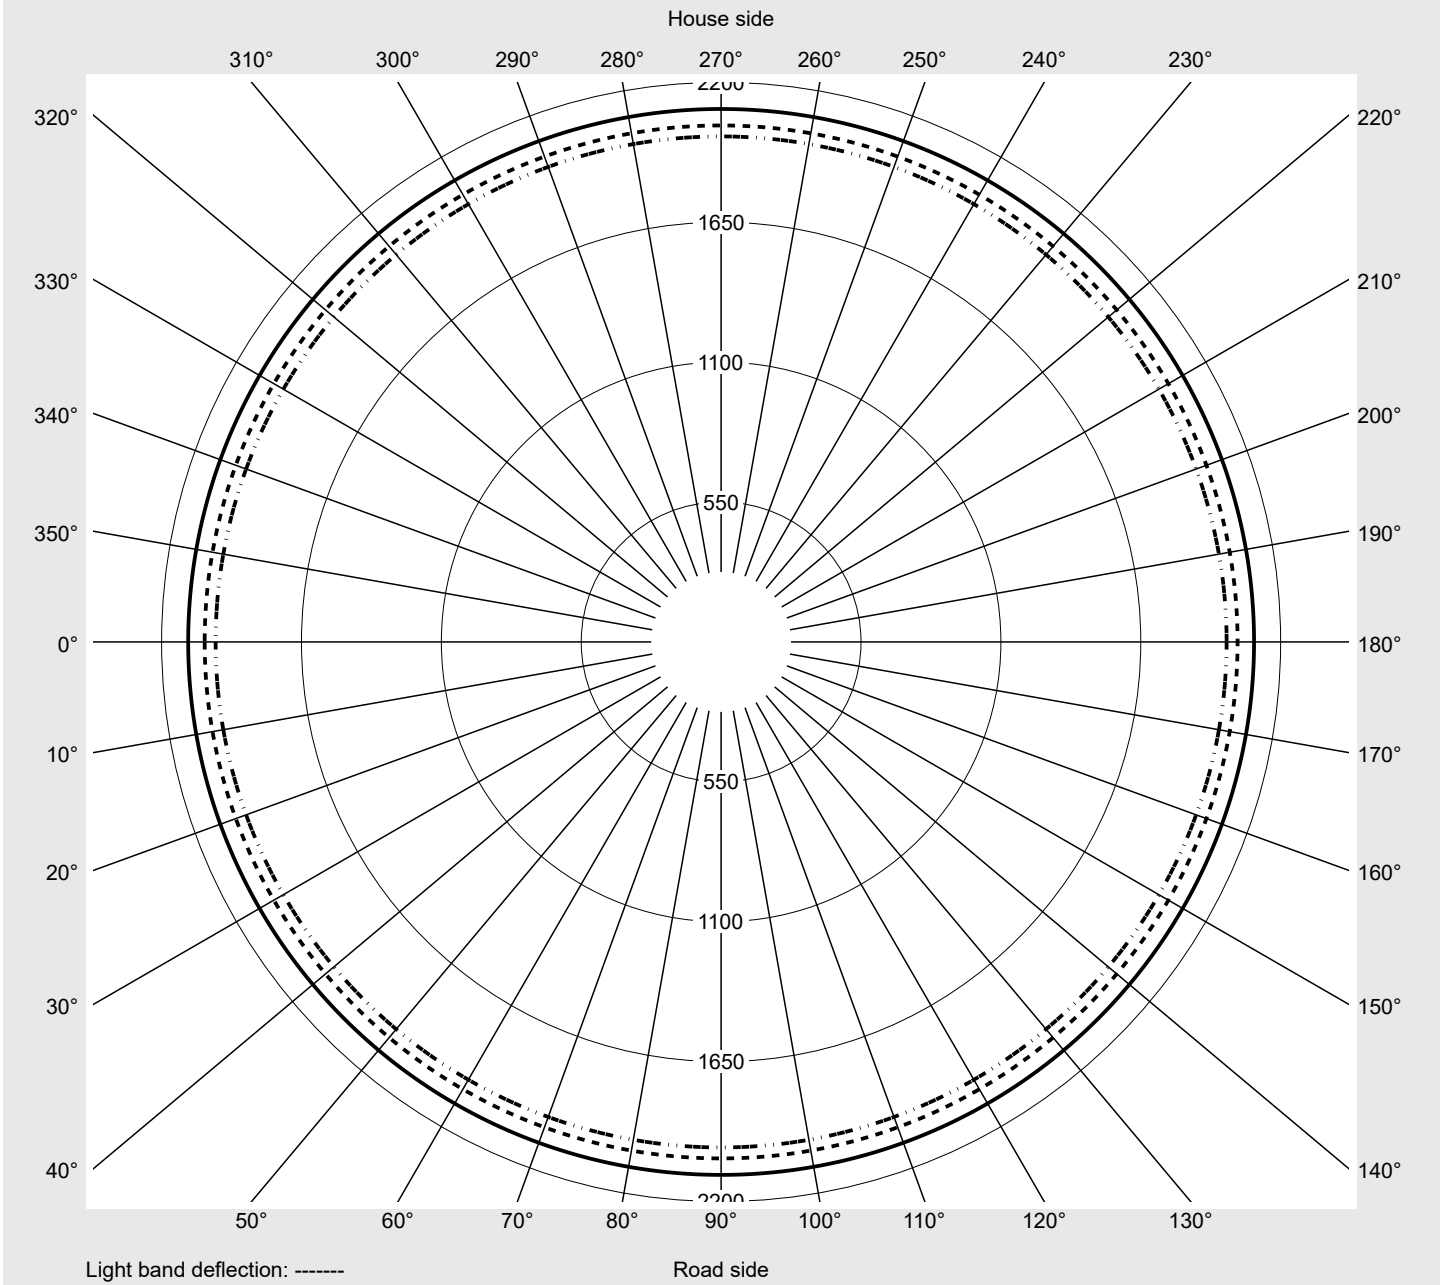

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B1B3AC EAN: 4058352220818	LP number 58555_5
---	---	-----------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1987.6	3.0	3.0
2,5°	2030.7	24.3	27.3
5,0°	2095.5	50.1	77.3
7,5°	2026.9	72.5	149.8
10,0°	1791.8	85.3	235.1
12,5°	1509.5	89.6	324.7
15,0°	1149.0	81.5	406.2
17,5°	740.6	61.1	467.3
20,0°	508.4	47.7	514.9
22,5°	427.7	44.9	559.8
25,0°	399.1	46.2	606.1
27,5°	363.0	45.9	652.0
30,0°	308.9	42.3	694.3
32,5°	237.9	35.0	729.4
35,0°	171.0	26.9	756.3
37,5°	124.2	20.7	777.0
40,0°	96.7	17.0	794.0
42,5°	81.3	15.1	809.1
45,0°	73.6	14.3	823.4
47,5°	71.2	14.4	837.8
50,0°	74.3	15.6	853.4
52,5°	79.9	17.4	870.8
55,0°	87.8	19.7	890.5
57,5°	90.8	21.0	911.5
60,0°	83.4	19.8	931.3
62,5°	69.1	16.8	948.1
65,0°	54.1	13.4	961.5
67,5°	42.5	10.8	972.3
70,0°	33.2	8.6	980.9
72,5°	25.3	6.6	987.5
75,0°	18.4	4.9	992.4
77,5°	12.8	3.4	995.8
80,0°	8.4	2.3	998.1
82,5°	4.7	1.3	999.3
85,0°	1.9	0.5	999.8
87,5°	0.4	0.1	1000.0
90,0°	0.0	0.0	1000.0
100,0°	0.0	0.0	1000.0
110,0°	0.0	0.0	1000.0
120,0°	0.0	0.0	1000.0
130,0°	0.0	0.0	1000.0
140,0°	0.0	0.0	1000.0
150,0°	0.0	0.0	1000.0
160,0°	0.0	0.0	1000.0
170,0°	0.0	0.0	1000.0
180,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B1B3AC EAN: 4058352220818	LP number 58555_5
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5350	51.0
95	239	252	5083	48.1
90	224	250	4815	45.2
85	211	247	4548	42.4
80	197	245	4280	39.8
75	182	242	4013	37.1
70	169	239	3745	34.5
65	157	236	3478	31.7
60	143	233	3210	29.3
55	130	230	2943	26.8
50	117	226	2675	24.4
45	105	222	2408	22.1
40	93	217	2140	19.7
35	81	212	1873	17.4
30	69	206	1605	15.2
25	57	199	1338	13.0
20	45	191	1070	10.9
15	34	180	802	8.8