

Photometric test report

Family
Floodlight 20 mini LED

Order number: **5XA7672B2D3AC**
EAN: **4058352221136**

LP number
58553_3



Version design bracket
Optic asymmetric distribution PL52
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
(unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 6270 lm
Power consumption = 51.0 W
Luminous efficacy = 122.9 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: **827 cd/klm**

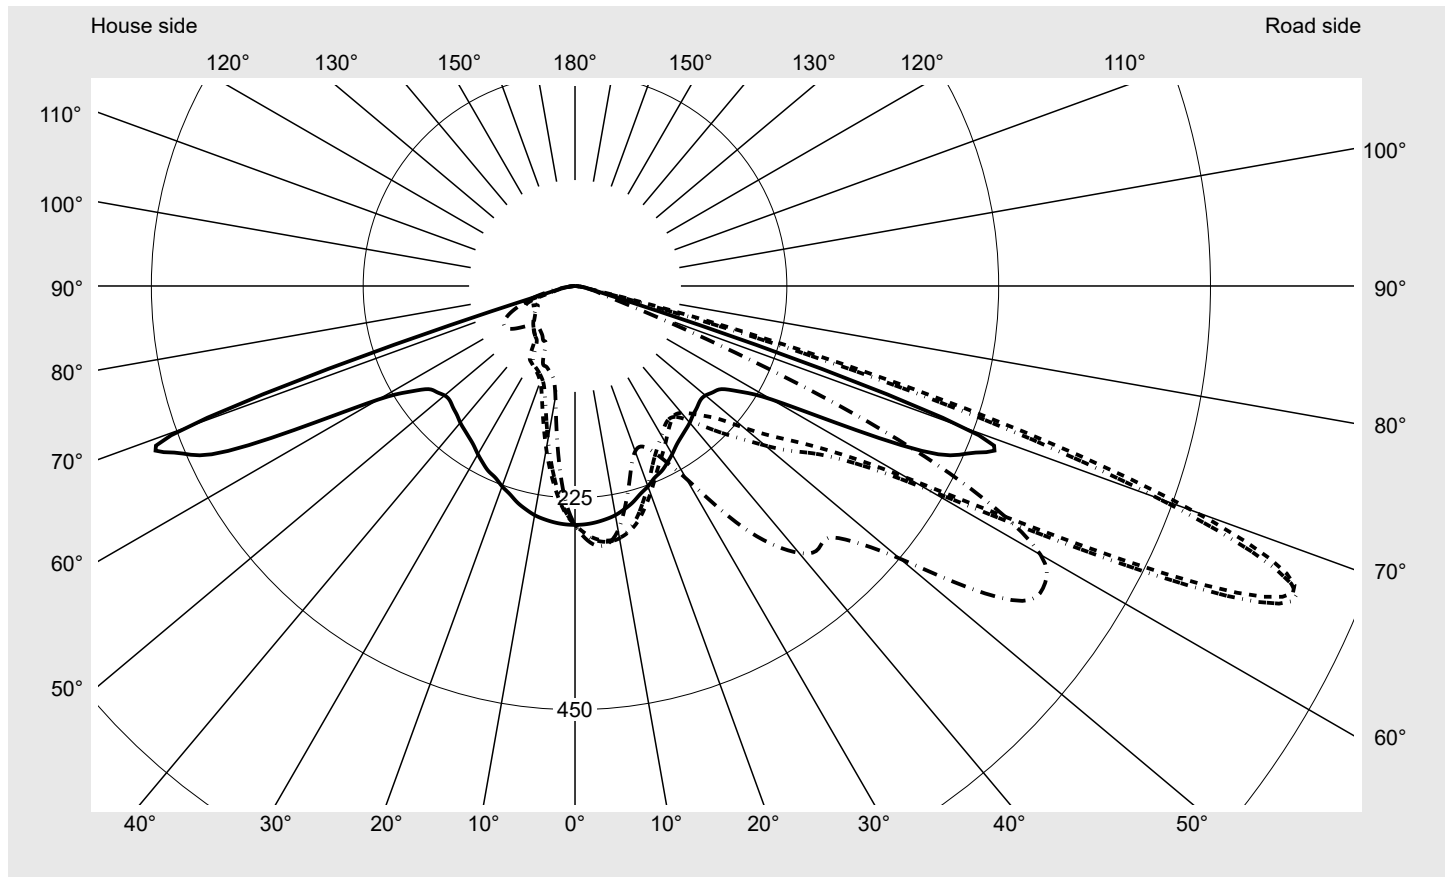

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2D3AC EAN: 4058352221136	LP number 58553_3
--	---	------------------------------------



Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

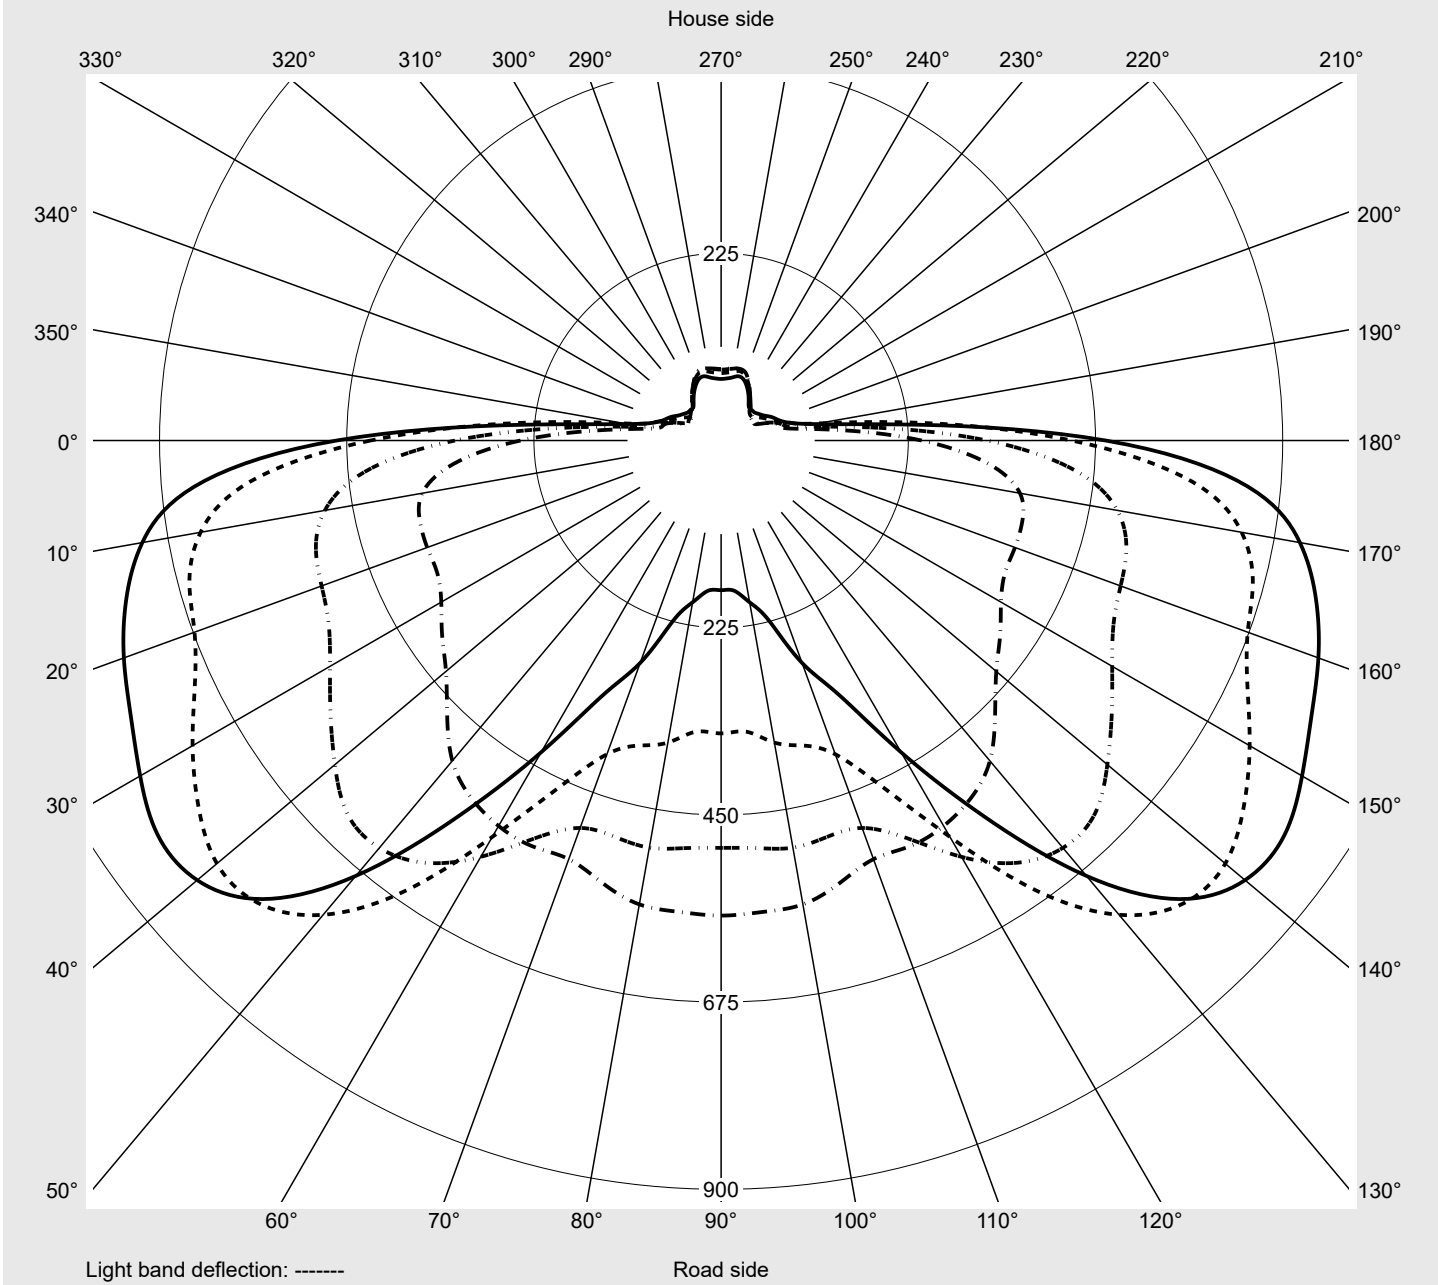

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2D3AC EAN: 4058352221136	LP number 58553_3
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	253.4	254.9	256.4	258.0	259.5	261.1	262.4	263.4	264.5	265.4	266.3	266.9	267.4
5,0°	252.0	255.2	258.3	261.1	263.7	266.3	268.4	270.1	271.6	272.8	273.7	274.6	275.2
7,5°	249.9	254.7	259.0	262.7	265.9	268.8	271.0	272.7	273.9	274.6	275.1	275.5	275.5
10,0°	247.1	253.2	258.3	262.6	266.1	268.7	270.7	271.8	272.0	271.6	270.6	269.4	267.8
12,5°	242.8	250.3	256.3	260.8	264.0	266.2	267.2	266.9	265.2	262.4	259.1	255.6	252.1
15,0°	237.8	246.4	253.0	257.5	260.3	261.5	261.0	258.6	254.4	249.3	243.9	238.7	233.5
17,5°	231.4	241.9	248.9	253.2	255.1	254.7	251.9	246.8	240.3	233.3	226.3	219.9	214.0
20,0°	226.5	237.3	244.7	248.7	249.4	247.0	241.7	234.4	226.2	217.9	210.2	203.6	198.3
22,5°	220.6	233.3	240.9	244.1	243.3	238.5	230.9	221.6	211.9	203.1	195.7	190.4	186.7
25,0°	217.2	230.8	238.8	241.4	238.8	231.5	221.3	210.4	200.2	191.7	186.1	183.2	182.9
27,5°	211.9	228.0	237.0	239.2	235.0	225.4	213.2	201.1	191.1	184.3	181.2	182.4	186.4
30,0°	206.3	222.9	232.5	234.4	229.0	218.0	204.9	192.3	183.6	179.2	180.9	187.1	195.9
32,5°	200.5	218.7	228.7	229.0	221.2	208.7	195.3	183.8	176.9	177.0	184.1	197.2	213.7
35,0°	196.2	216.1	227.0	225.9	216.5	202.5	188.2	177.1	173.1	178.5	193.9	217.2	243.3
37,5°	192.8	214.5	225.3	223.2	212.3	197.3	182.7	173.2	175.3	188.7	214.0	245.7	277.7
40,0°	189.6	213.1	223.4	221.9	210.0	194.2	180.3	175.9	185.7	207.5	240.4	277.4	310.3
42,5°	185.7	211.7	222.8	221.5	208.9	192.7	181.7	184.0	201.8	231.7	270.0	304.6	334.6
45,0°	183.0	210.3	223.6	222.1	209.1	193.9	187.2	195.2	220.8	254.0	286.5	314.9	338.2
47,5°	180.3	212.5	227.7	225.4	212.0	199.0	194.8	210.1	240.6	271.7	299.3	321.7	340.0
50,0°	180.9	217.4	236.4	236.0	222.7	210.3	212.6	234.2	263.6	291.2	311.5	327.9	344.0
52,5°	185.1	227.1	248.8	248.6	237.5	229.9	238.2	261.0	287.4	309.3	325.3	338.1	360.6
55,0°	191.0	242.1	268.8	270.6	261.4	258.5	268.5	289.3	310.3	327.0	343.8	368.9	407.8
57,5°	209.2	271.8	303.8	307.5	302.1	301.4	312.0	330.2	348.5	367.0	400.1	440.6	473.6
60,0°	241.1	322.9	364.8	374.8	375.9	376.5	388.5	409.3	431.7	465.7	502.6	524.1	534.9
62,5°	320.0	429.7	483.6	504.3	511.0	520.5	542.8	573.2	606.0	635.1	639.1	619.6	577.8
65,0°	421.5	568.6	635.3	661.7	673.6	698.0	733.6	767.0	791.1	786.5	744.2	660.3	550.1
67,5°	462.2	635.6	706.4	740.4	764.0	783.0	806.3	826.7	822.1	779.5	683.1	552.0	432.7
70,0°	439.4	623.7	722.7	767.0	750.7	724.1	713.8	699.9	659.8	581.1	469.0	370.0	297.7
72,5°	145.9	232.6	294.5	375.4	459.3	476.0	466.3	444.0	388.2	309.7	247.5	213.0	182.8
75,0°	37.2	40.5	45.0	53.0	97.4	158.1	175.4	167.3	114.0	78.9	104.0	105.0	101.6
77,5°	20.7	22.2	22.7	23.3	27.5	36.2	40.8	28.4	24.8	24.4	34.4	39.0	40.2
80,0°	12.0	11.3	11.0	11.2	12.5	15.0	15.0	13.6	13.3	14.0	15.0	15.3	17.0
82,5°	6.5	6.1	6.1	6.4	6.7	7.4	8.2	7.9	8.1	8.3	8.4	8.3	9.7
85,0°	2.9	2.6	2.6	2.7	2.9	3.3	3.5	3.6	3.7	3.7	3.7	3.5	3.4
87,5°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2D3AC EAN: 4058352221136	LP number 58553_3
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	267.8	268.1	268.4	268.7	269.0	269.1	251.7	249.8	248.0	246.2	244.3	242.6	240.9
5,0°	275.6	275.9	276.3	276.7	277.0	277.2	248.2	244.0	239.6	235.0	230.4	225.8	221.2
7,5°	275.3	275.0	274.9	275.0	275.2	275.3	244.1	237.5	230.3	222.6	214.9	207.0	199.0
10,0°	266.2	264.6	263.6	263.3	263.3	263.4	239.2	230.0	219.9	209.1	197.8	186.7	175.8
12,5°	248.8	245.9	244.1	243.2	242.9	242.8	233.0	221.3	208.1	194.3	180.0	166.3	153.4
15,0°	229.0	225.2	222.6	221.2	220.6	220.5	225.8	211.4	195.4	178.7	162.2	147.1	133.8
17,5°	208.9	204.9	202.1	200.5	199.8	199.6	218.1	201.1	182.2	163.2	145.3	130.0	118.1
20,0°	194.2	190.6	188.5	187.4	186.9	186.9	210.5	191.0	169.3	148.6	130.5	116.8	108.2
22,5°	184.6	183.4	183.1	183.6	184.2	184.5	203.2	181.1	157.2	135.5	118.4	107.6	102.4
25,0°	183.9	185.6	187.8	190.6	192.6	193.2	196.4	171.4	145.9	124.0	108.9	101.9	98.7
27,5°	191.2	195.9	201.2	207.0	210.4	211.0	189.8	162.2	135.0	114.2	102.5	98.0	95.9
30,0°	205.1	213.5	222.6	232.7	237.7	236.4	180.8	151.5	124.3	105.4	97.8	94.9	93.3
32,5°	230.0	245.0	259.2	272.2	276.6	274.1	173.5	141.9	114.7	99.0	94.1	92.1	89.3
35,0°	266.1	285.6	303.5	314.0	314.9	314.8	166.4	132.6	105.7	94.0	90.6	87.5	77.7
37,5°	302.9	322.5	336.8	344.3	344.8	346.7	159.8	124.3	99.1	90.5	86.2	78.6	69.8
40,0°	334.1	349.7	360.6	366.5	368.0	370.1	152.8	115.7	93.0	86.9	78.0	69.3	66.7
42,5°	355.7	366.5	373.9	378.8	379.7	380.7	146.0	108.2	88.4	83.7	69.4	64.4	64.2
45,0°	355.2	361.7	368.1	374.9	377.3	378.9	139.2	100.1	84.1	80.3	63.5	61.4	61.9
47,5°	355.8	364.3	376.0	391.6	399.1	402.5	134.3	94.7	80.7	77.3	60.3	58.8	59.5
50,0°	364.3	384.7	407.6	433.1	445.9	450.5	128.9	89.3	77.4	74.2	56.6	56.3	56.6
52,5°	395.5	433.8	469.8	502.4	520.5	526.0	127.0	85.5	75.0	71.2	53.7	53.7	53.9
55,0°	451.6	493.4	531.1	562.3	577.5	583.0	126.6	82.7	72.8	68.1	50.9	50.9	51.5
57,5°	505.1	534.7	563.2	583.5	589.7	591.1	130.5	81.8	71.5	64.9	48.4	48.1	48.7
60,0°	537.9	535.5	550.7	566.1	568.8	571.0	143.7	83.2	71.6	61.8	46.4	45.4	46.3
62,5°	527.1	495.6	493.1	496.9	491.8	489.6	180.3	94.3	75.5	63.3	49.3	45.8	44.7
65,0°	459.5	401.3	379.6	368.7	351.4	352.1	243.0	118.3	84.1	70.3	61.3	55.1	48.7
67,5°	338.8	284.5	225.0	197.5	181.3	179.9	221.0	113.9	83.3	72.8	66.8	59.9	55.6
70,0°	242.2	200.8	99.2	72.0	66.9	70.0	138.6	70.9	68.1	65.0	60.1	57.1	54.6
72,5°	153.6	125.3	46.7	33.4	33.1	33.4	51.7	32.6	30.8	31.9	33.7	38.5	41.9
75,0°	88.5	70.5	31.8	25.1	24.4	24.4	24.5	22.0	22.0	21.9	22.6	24.1	25.8
77,5°	35.9	33.1	21.4	17.3	16.4	16.6	16.0	15.4	16.0	16.0	16.6	17.6	18.8
80,0°	18.9	16.9	12.5	11.1	10.6	10.6	11.8	10.4	10.4	10.7	11.3	11.9	12.5
82,5°	11.3	9.5	6.6	5.8	5.4	5.4	6.5	5.9	6.2	6.6	7.1	7.3	7.5
85,0°	3.2	2.9	2.4	2.2	2.1	2.0	2.7	2.7	3.0	3.3	3.4	3.6	3.6
87,5°	0.8	0.8	0.8	0.8	0.9	0.9	1.1	1.2	1.2	1.2	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2D3AC EAN: 4058352221136	LP number 58553_3
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	0.4	0.4
2,5°	239.2	237.4	235.7	234.3	233.0	231.9	230.8	229.9	229.2	228.9	228.8	3.0	3.4
5,0°	216.6	212.2	208.0	204.2	200.8	198.0	195.3	193.3	191.8	191.1	190.8	5.8	9.2
7,5°	191.3	184.0	177.3	171.3	166.0	161.5	157.7	154.8	152.7	151.6	151.2	8.2	17.4
10,0°	165.6	156.3	148.0	140.8	134.8	129.9	126.0	123.1	121.2	120.1	119.8	10.3	27.7
12,5°	141.7	131.9	123.8	117.4	112.5	109.1	106.7	105.1	104.1	103.5	103.2	12.0	39.7
15,0°	123.0	114.7	109.2	105.6	103.1	101.2	99.7	98.5	97.8	97.3	97.2	13.5	53.2
17,5°	110.2	105.7	102.7	100.5	98.6	97.1	95.7	94.7	94.1	93.6	93.4	14.7	67.9
20,0°	103.7	101.0	99.1	97.4	95.9	94.4	93.1	92.2	91.5	91.1	90.8	15.9	83.8
22,5°	99.7	97.8	96.4	95.1	93.8	92.5	91.1	89.6	89.2	89.1	89.1	17.1	100.9
25,0°	96.8	95.4	94.0	93.1	91.4	85.6	79.7	77.9	77.3	76.9	76.6	18.2	119.1
27,5°	94.3	91.9	89.6	84.7	75.7	71.6	70.1	69.0	68.2	67.7	67.4	19.5	138.6
30,0°	88.9	83.4	79.2	72.9	71.1	70.3	69.5	68.7	67.9	67.3	67.0	21.0	159.6
32,5°	78.1	73.8	71.5	70.7	70.3	69.5	68.1	66.7	65.4	64.4	64.0	22.9	182.5
35,0°	70.8	70.1	69.9	69.6	68.3	66.7	65.1	63.9	62.8	62.1	61.7	25.1	207.6
37,5°	68.6	68.4	68.2	66.9	65.5	64.6	63.7	62.7	61.7	60.7	60.2	27.5	235.1
40,0°	66.6	66.6	65.6	64.6	64.0	63.2	62.6	61.9	60.8	59.7	59.0	30.0	265.1
42,5°	64.7	64.2	63.9	63.6	63.2	62.6	62.3	62.0	61.2	59.9	59.0	32.3	297.4
45,0°	62.3	62.5	62.8	62.7	63.0	63.3	63.4	63.0	62.3	61.0	59.9	34.0	331.4
47,5°	60.2	61.2	61.9	62.5	63.8	64.1	64.6	64.7	64.3	63.1	62.2	36.2	367.6
50,0°	57.7	59.3	61.1	62.1	64.0	65.2	66.6	67.6	67.6	66.6	66.0	39.4	407.0
52,5°	55.2	57.1	59.3	61.1	63.9	67.1	70.6	73.2	73.6	72.9	72.2	44.1	451.1
55,0°	52.8	54.9	57.6	60.6	64.8	70.4	76.4	80.6	80.3	79.6	79.1	49.5	500.6
57,5°	50.5	52.7	56.2	60.6	66.5	74.0	82.1	86.7	86.3	85.6	84.1	55.7	556.3
60,0°	48.1	50.9	55.3	61.1	68.7	77.7	86.5	89.1	88.1	86.8	85.9	63.4	619.7
62,5°	46.1	49.1	54.2	61.1	69.2	77.8	85.6	89.4	87.8	86.1	85.2	74.4	694.1
65,0°	46.4	48.2	53.2	60.1	68.5	76.8	83.7	86.3	83.9	82.0	81.1	84.5	778.5
67,5°	52.5	52.0	52.1	57.7	65.3	72.5	78.4	80.0	76.9	74.9	74.0	82.2	860.7
70,0°	54.5	58.5	57.0	53.9	59.7	65.6	69.8	70.5	67.6	65.1	64.4	69.4	930.2
72,5°	52.2	57.1	55.0	50.9	51.3	55.5	58.3	58.3	55.1	53.4	54.1	39.8	969.9
75,0°	28.6	36.9	40.3	39.0	41.6	44.9	46.8	46.1	43.2	41.5	42.5	15.6	985.6
77,5°	20.4	22.6	25.3	28.0	30.9	33.4	34.8	33.4	31.1	29.8	29.9	7.0	992.5
80,0°	13.6	15.1	17.0	19.0	21.0	22.4	23.0	21.8	20.4	19.5	19.3	4.0	996.5
82,5°	8.0	8.7	9.6	10.5	11.0	11.5	11.5	11.1	10.4	10.1	10.0	2.2	998.8
85,0°	3.6	3.8	4.1	4.4	4.7	5.0	5.2	5.0	4.7	4.6	4.5	1.0	999.7
87,5°	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2D3AC EAN: 4058352221136	LP number 58553_3
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6270	51.0
95	239	252	5957	48.0
90	224	250	5644	45.2
85	211	247	5330	42.4
80	197	245	5017	39.8
75	182	242	4703	37.1
70	169	239	4390	34.5
65	157	236	4076	31.7
60	143	233	3763	29.3
55	130	230	3449	26.8
50	117	226	3136	24.4
45	104	222	2822	22.1
40	93	217	2508	19.7
35	81	212	2195	17.4
30	69	206	1881	15.2
25	57	199	1568	13.0
20	45	191	1254	10.9
15	34	180	940	8.8