

## Photometric test report

**Family**  
**Floodlight 20 mini LED**

**Order number: 5XA7672C2A1AC**  
**EAN: 4058352221174**

**LP number**  
**58552\_11**



**Version** mounting bracket  
**Optic** asymmetric distribution PL43  
**Cover** toughened safety glass  
**Lamps** 1 x LED 4000K / CRI ≥ 70  
 (unbekannt LED 4000K / CRI = 70)  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 13030 lm  
 Power consumption = 95.8 W  
 Luminous efficacy = 136 lm/W

**serial**  
**documentation**  
**25.08.2021**

**siteco**

**Luminous intensity in cd/klm**


**C180-0**

**C230-50**

**C235-55**

**C270-90**

**Imax: 733 cd/klm**

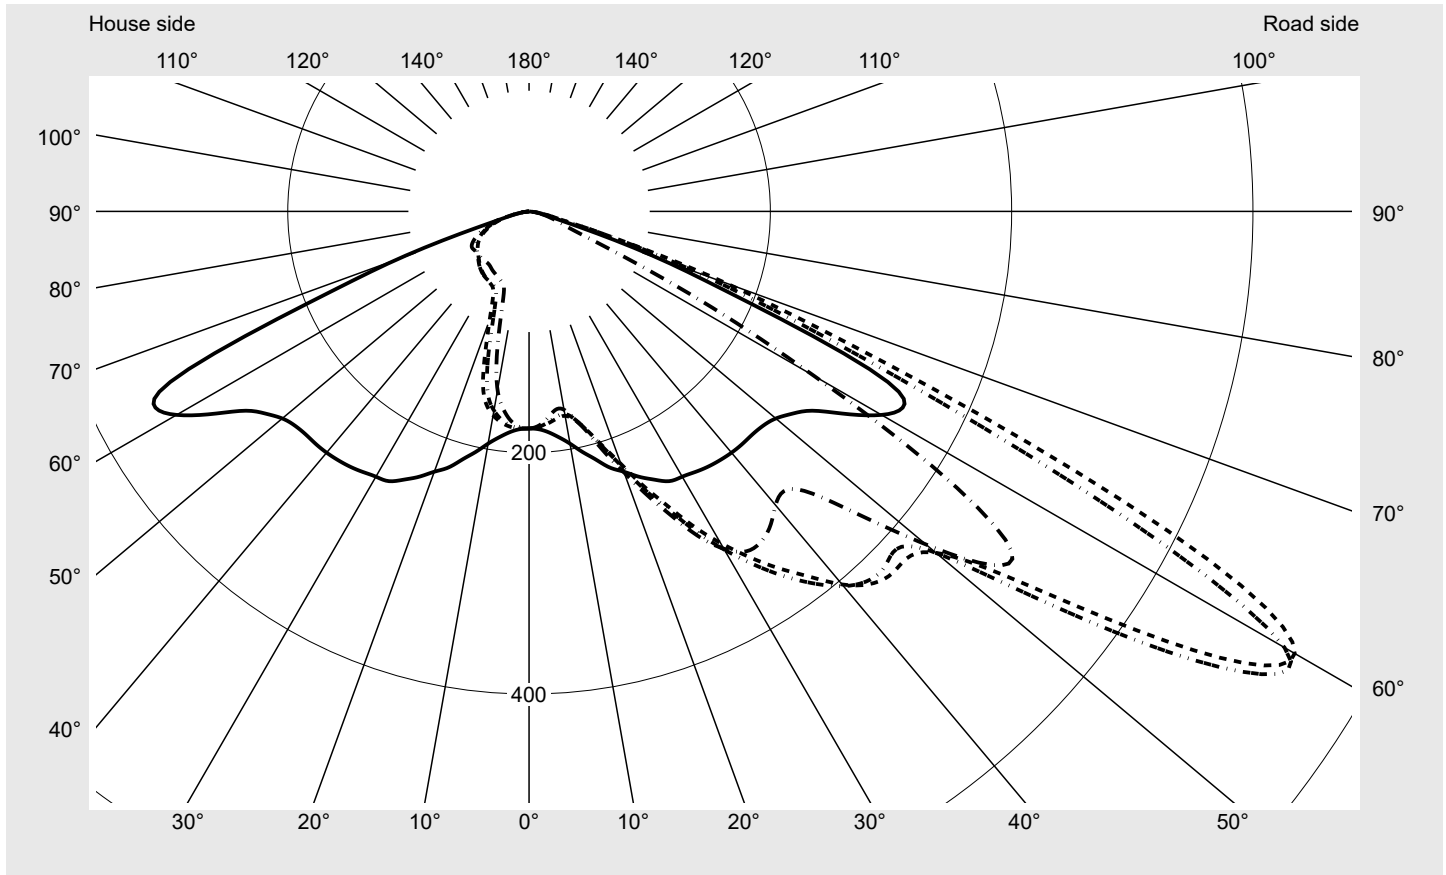

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	250.7
Imax 80°	13.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672C2A1AC</b> <b>EAN: 4058352221174</b>	<b>LP number</b> <b>58552_11</b>
--	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

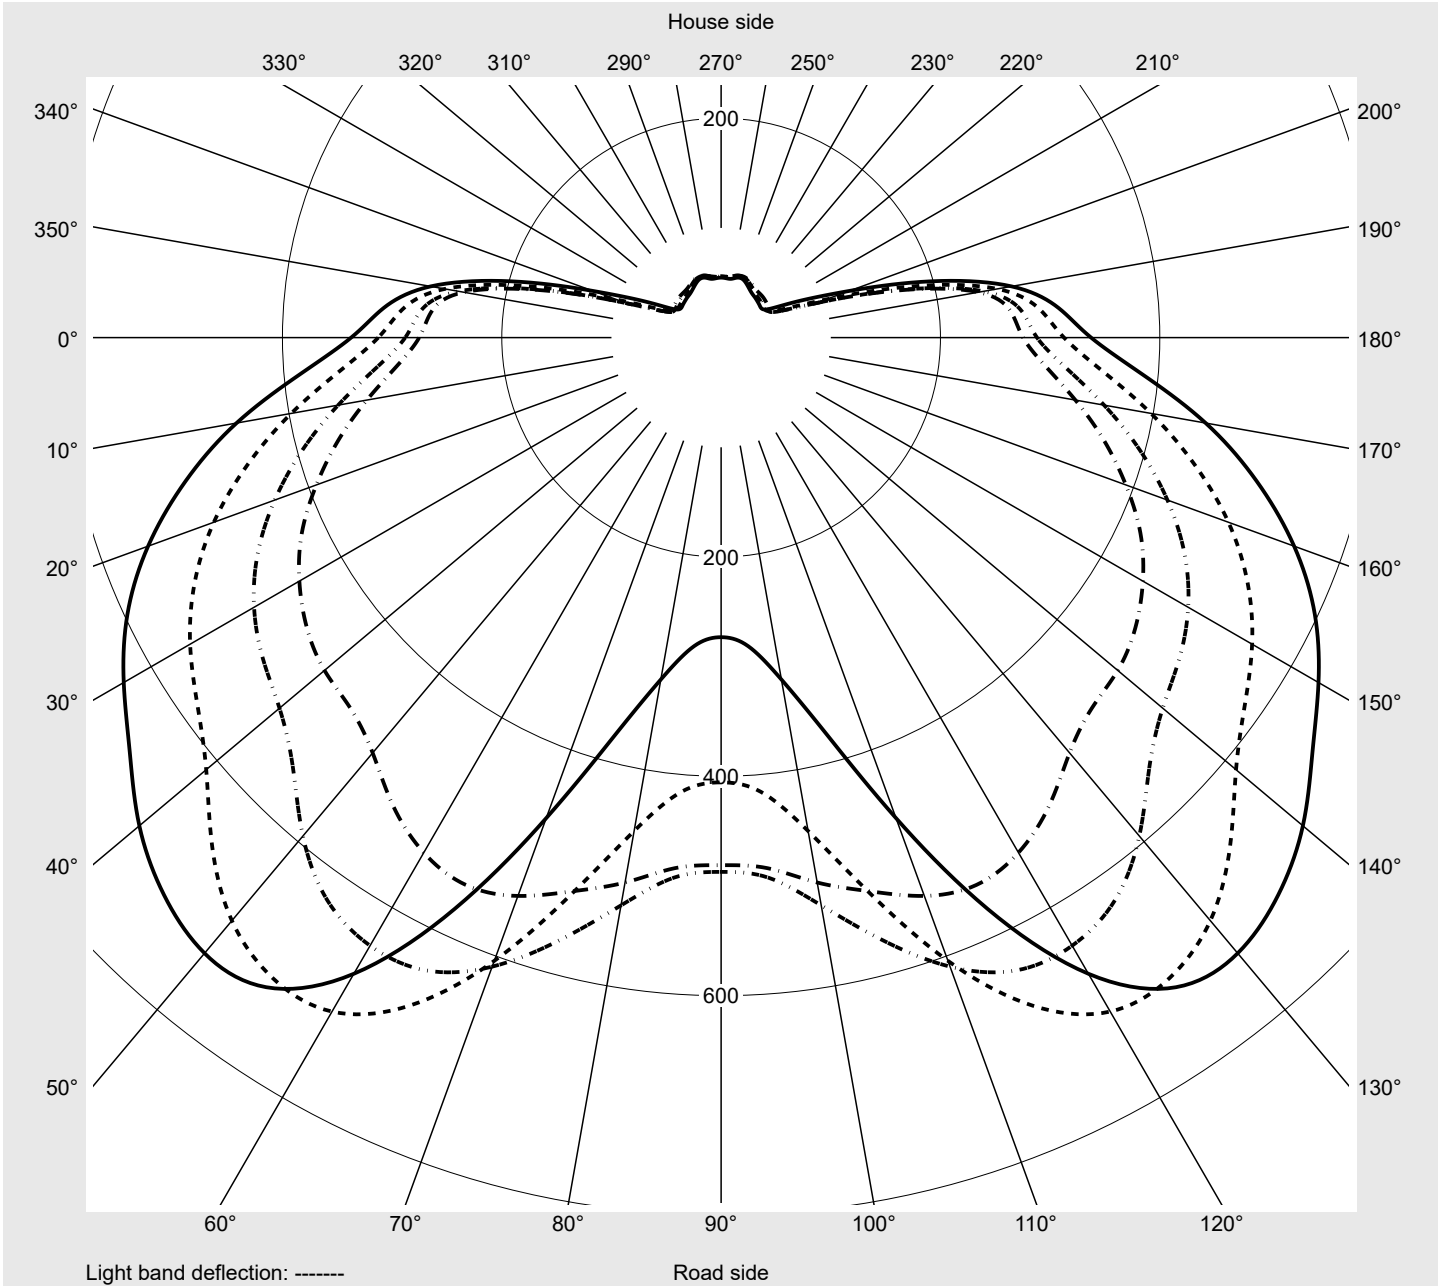

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672C2A1AC</b> <b>EAN: 4058352221174</b>	<b>LP number</b> <b>58552_11</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	180.7	180.4	180.3	180.3	180.2	180.2	180.1	179.9	179.6	179.4	179.2	178.9	178.7
5,0°	183.7	183.4	182.9	182.4	181.8	181.2	180.4	179.5	178.5	177.5	176.6	175.7	174.9
7,5°	188.8	188.0	186.9	185.6	184.1	182.6	180.9	179.0	177.0	175.1	173.3	171.8	170.3
10,0°	195.5	194.5	192.6	190.3	187.8	185.1	182.2	179.4	176.6	174.2	172.1	170.5	169.2
12,5°	204.2	202.3	199.5	196.0	192.4	188.8	185.5	182.6	180.2	178.5	177.4	176.7	176.5
15,0°	212.7	210.5	206.6	202.2	198.1	194.5	191.7	189.8	188.7	188.2	188.6	189.0	189.2
17,5°	222.6	218.8	214.2	209.6	205.7	202.9	201.4	201.1	202.0	203.2	204.3	205.5	206.5
20,0°	229.6	226.1	221.4	216.9	213.9	212.6	213.3	215.5	217.8	220.3	222.9	225.1	227.0
22,5°	238.0	233.6	228.9	225.2	223.5	224.4	228.1	232.3	236.6	241.1	245.4	249.1	250.8
25,0°	245.3	242.0	238.0	235.4	235.1	238.8	244.2	250.4	256.6	262.6	267.9	272.3	275.4
27,5°	252.1	248.7	246.0	245.2	248.7	255.8	263.3	271.1	278.8	286.6	293.6	298.6	302.1
30,0°	253.9	252.1	250.7	252.4	259.9	269.9	280.3	290.3	299.9	309.1	317.3	323.8	328.0
32,5°	256.1	255.0	255.6	260.4	271.1	283.3	295.9	308.4	320.0	330.1	339.6	347.2	351.5
35,0°	258.4	258.8	262.3	270.7	283.3	297.5	311.7	325.9	339.5	351.0	361.1	369.2	372.1
37,5°	259.9	262.2	269.2	281.6	295.7	311.3	327.3	343.0	358.0	371.4	381.6	388.9	388.5
40,0°	261.1	265.5	276.9	292.5	308.5	325.7	343.7	361.7	378.1	393.0	403.6	405.4	400.4
42,5°	261.5	268.2	284.0	302.1	321.0	340.5	360.0	379.7	396.9	411.3	418.8	415.4	406.2
45,0°	261.6	270.9	290.5	311.6	332.9	354.4	376.5	396.4	412.8	424.4	424.9	416.8	401.9
47,5°	263.0	275.1	297.2	320.8	344.1	366.4	387.2	405.7	419.4	427.7	425.2	413.8	401.7
50,0°	267.0	283.1	309.3	337.2	363.9	388.2	409.6	426.5	438.2	442.5	440.2	440.2	447.9
52,5°	275.3	296.7	328.0	361.3	392.7	421.9	444.1	461.2	472.1	478.0	494.3	521.3	542.3
55,0°	288.0	315.6	354.6	395.1	433.1	466.3	491.8	510.1	525.7	552.5	593.3	626.2	640.2
57,5°	312.7	349.0	398.0	446.9	492.3	529.8	559.1	583.1	612.9	656.3	694.0	712.9	709.6
60,0°	337.3	385.8	448.7	505.5	556.0	597.4	629.0	658.3	692.5	718.5	732.8	723.1	669.8
62,5°	350.0	407.7	477.2	540.5	593.3	632.6	659.3	681.3	689.2	682.0	654.5	579.5	477.7
65,0°	316.3	376.8	447.1	504.0	548.1	577.7	594.3	595.3	578.0	540.7	466.8	384.3	313.0
67,5°	196.1	254.1	308.0	354.9	392.3	417.5	425.2	415.6	385.9	336.8	287.6	242.8	197.9
70,0°	116.8	142.9	168.8	199.2	226.4	242.1	250.7	246.5	228.8	200.6	173.1	148.7	126.7
72,5°	48.9	42.1	39.5	55.6	105.4	131.8	133.6	125.8	106.5	85.8	80.1	78.5	69.5
75,0°	22.3	19.5	19.2	20.9	34.8	56.7	57.8	50.8	30.9	26.0	32.2	32.5	30.1
77,5°	13.4	12.3	12.2	12.9	16.0	21.6	22.1	17.4	15.3	15.3	17.4	19.0	21.7
80,0°	7.7	7.4	7.7	8.1	8.7	10.2	10.2	9.4	9.7	10.0	10.4	10.9	12.2
82,5°	4.1	4.1	4.3	4.6	4.8	5.1	5.7	5.7	5.9	6.0	6.1	6.0	5.9
85,0°	1.9	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.8	2.8	2.7	2.6	2.4
87,5°	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672C2A1AC</b> <b>EAN: 4058352221174</b>	<b>LP number</b> <b>58552_11</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sitEco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	178.4	178.2	178.1	178.0	177.9	177.9	180.8	180.8	180.8	180.8	180.7	180.7	180.6
5,0°	174.1	173.4	172.9	172.6	172.5	172.5	184.0	183.9	183.7	183.4	183.0	182.4	181.8
7,5°	169.0	167.8	167.0	166.4	166.1	166.0	189.0	188.8	188.2	187.3	186.2	184.7	182.9
10,0°	168.2	167.4	167.0	166.8	166.9	166.9	196.1	195.7	194.6	192.8	190.4	187.3	183.8
12,5°	176.3	176.2	176.2	176.5	176.6	176.7	204.8	204.3	202.6	199.6	195.5	190.6	184.6
15,0°	189.4	189.4	189.7	190.1	190.5	190.5	214.0	213.3	210.7	206.2	200.3	192.9	184.0
17,5°	207.3	208.0	208.5	209.2	209.8	209.9	223.3	222.1	218.4	212.3	204.0	193.6	180.1
20,0°	228.2	228.8	229.4	229.9	230.3	230.3	231.5	229.8	224.9	217.0	205.7	190.3	166.4
22,5°	252.4	252.9	253.3	253.8	254.0	253.8	239.6	237.7	231.4	220.5	203.7	177.1	144.0
25,0°	276.7	276.9	277.0	277.7	278.0	277.7	247.5	245.1	236.8	222.0	193.8	156.1	119.5
27,5°	303.6	303.1	302.4	303.2	303.6	303.3	253.3	250.0	239.7	217.0	174.8	130.8	95.4
30,0°	328.6	326.1	324.3	324.2	323.9	322.9	255.2	251.2	238.8	203.2	152.9	107.3	78.5
32,5°	350.6	346.3	343.1	340.9	337.1	334.2	257.1	252.7	235.1	186.8	130.3	88.3	69.8
35,0°	368.8	361.3	356.5	350.6	340.0	334.7	258.7	253.5	225.8	166.7	106.8	73.1	65.2
37,5°	380.8	369.5	363.2	351.9	334.9	328.5	259.4	252.9	212.7	146.0	88.0	65.4	62.8
40,0°	387.7	373.0	363.3	343.5	323.9	317.9	259.7	250.3	199.2	127.8	76.1	61.9	60.7
42,5°	390.0	371.4	353.5	331.6	318.1	313.9	259.4	246.9	189.4	115.0	70.4	59.4	58.8
45,0°	384.4	366.9	352.3	340.9	332.2	329.9	258.7	243.2	181.7	105.8	65.8	57.1	57.0
47,5°	396.0	389.7	384.4	380.6	373.9	373.2	258.9	240.0	175.3	100.4	62.3	55.0	55.2
50,0°	458.1	458.1	448.9	441.8	432.1	429.5	260.8	237.4	169.3	94.5	59.2	53.0	53.5
52,5°	550.7	541.8	522.6	504.5	485.6	481.0	265.5	238.4	165.7	91.4	57.0	51.1	51.7
55,0°	636.6	610.4	568.8	525.7	494.3	487.2	275.3	243.2	167.6	91.4	55.9	49.3	49.7
57,5°	672.1	604.8	524.7	456.8	415.8	405.5	292.0	255.8	180.6	101.7	61.0	48.6	47.5
60,0°	574.7	466.3	375.8	316.6	282.4	273.2	309.0	268.9	198.3	124.4	79.5	53.3	45.7
62,5°	381.2	303.5	247.0	203.1	171.1	163.0	313.6	273.2	210.0	145.1	101.0	67.1	46.2
65,0°	254.3	201.4	146.7	98.7	73.7	72.1	277.5	248.6	202.2	149.0	104.6	72.8	50.4
67,5°	162.1	121.9	57.2	40.9	37.9	36.6	147.3	155.0	152.5	128.7	92.2	62.6	49.8
70,0°	105.4	79.1	39.4	31.3	29.5	28.0	47.6	43.2	62.9	70.1	56.8	49.6	43.3
72,5°	55.6	44.1	29.7	23.8	22.1	20.8	26.2	23.8	25.9	32.8	30.3	29.8	29.6
75,0°	29.5	29.7	23.0	18.3	17.0	15.7	18.4	16.6	17.8	20.4	20.1	19.7	19.5
77,5°	24.2	22.5	16.4	13.4	12.2	11.1	13.5	11.8	12.6	13.9	13.6	13.6	13.5
80,0°	13.8	12.7	10.0	9.0	7.9	7.1	7.8	7.7	8.0	8.9	8.9	8.8	8.8
82,5°	5.7	5.7	5.2	4.6	4.1	3.8	4.3	4.4	4.5	4.9	5.2	5.2	5.3
85,0°	2.2	2.0	1.8	1.6	1.5	1.4	2.0	2.0	2.1	2.3	2.4	2.5	2.5
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672C2A1AC</b> <b>EAN: 4058352221174</b>	<b>LP number</b> <b>58552_11</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	0.3	0.3
2,5°	180.5	180.3	180.0	179.8	179.6	179.4	179.1	178.9	178.7	178.7	178.8	2.1	2.4
5,0°	181.0	180.2	179.2	178.2	177.2	176.4	175.5	174.8	174.4	174.2	174.1	4.3	6.7
7,5°	180.8	178.6	176.4	174.2	172.0	170.0	168.2	166.7	165.6	165.1	164.9	6.3	13.0
10,0°	179.9	175.8	171.6	167.6	163.5	159.9	156.7	153.9	151.9	150.8	150.4	8.4	21.4
12,5°	178.0	171.0	163.7	156.5	149.3	142.5	136.1	130.8	127.0	124.6	123.8	10.4	31.8
15,0°	173.7	161.6	147.6	133.7	121.5	111.6	103.7	97.8	93.7	91.2	90.4	12.4	44.2
17,5°	160.5	139.0	119.5	103.6	91.7	83.3	77.4	73.6	71.1	69.7	69.2	14.5	58.7
20,0°	138.8	114.2	95.2	82.1	74.1	69.9	67.5	66.0	64.9	64.1	63.8	16.8	75.5
22,5°	114.0	92.0	78.5	71.5	68.4	66.7	65.3	64.0	63.0	62.2	61.8	19.5	95.0
25,0°	92.1	76.9	70.6	68.4	67.0	65.7	64.4	63.2	62.0	60.9	60.5	22.3	117.3
27,5°	76.0	69.9	68.2	67.3	66.3	65.3	64.0	62.6	61.2	59.9	59.2	25.3	142.7
30,0°	69.2	67.5	67.0	66.5	66.0	65.1	63.9	62.3	60.7	59.0	58.2	28.3	171.0
32,5°	66.4	65.9	65.9	65.9	65.8	65.1	63.7	62.0	60.1	58.2	57.1	31.3	202.3
35,0°	64.3	64.3	64.7	65.1	65.2	64.7	63.3	61.3	59.2	57.1	55.9	34.1	236.4
37,5°	62.5	62.8	63.3	64.0	64.2	63.9	62.6	60.7	58.6	56.4	55.0	36.8	273.2
40,0°	60.8	61.3	61.9	62.5	63.0	62.9	62.0	60.3	58.3	56.2	54.9	39.3	312.5
42,5°	59.2	59.8	60.2	61.0	61.6	62.1	61.6	60.0	58.1	56.3	55.1	41.7	354.3
45,0°	57.5	58.1	58.5	59.1	60.2	61.3	61.1	59.6	58.0	56.4	55.2	44.2	398.5
47,5°	55.9	56.5	56.7	57.3	58.8	60.4	60.6	59.2	57.6	56.2	55.1	47.2	445.7
50,0°	54.3	54.8	55.0	55.7	57.5	59.4	59.9	58.8	57.0	55.8	55.0	52.3	498.0
52,5°	52.5	53.2	53.5	54.3	56.1	58.3	59.3	58.5	56.9	55.7	55.2	59.5	557.5
55,0°	50.6	51.4	52.0	52.9	54.7	57.4	58.8	58.6	56.7	55.8	55.6	67.2	624.7
57,5°	48.3	49.4	50.2	51.3	53.2	56.2	58.2	58.2	56.1	55.7	56.0	73.8	698.5
60,0°	45.8	46.8	47.9	49.2	51.4	54.4	56.9	56.6	54.4	54.3	54.7	75.4	773.9
62,5°	43.1	43.7	44.7	46.1	48.5	51.4	54.1	53.6	51.5	51.2	51.5	70.8	844.7
65,0°	41.0	40.4	41.3	42.9	45.0	48.1	50.7	50.1	47.7	47.1	47.5	59.6	904.3
67,5°	40.3	36.4	37.3	38.9	41.3	44.1	45.9	44.8	41.9	41.5	42.4	41.3	945.6
70,0°	36.6	32.1	32.9	34.8	37.1	39.4	40.3	38.5	35.5	36.6	37.0	25.2	970.8
72,5°	27.7	26.2	27.5	29.5	31.6	33.3	33.6	30.8	28.6	31.2	32.2	13.1	983.9
75,0°	19.9	20.5	21.9	23.7	25.4	26.8	26.5	23.8	21.8	23.3	24.5	6.9	990.8
77,5°	13.9	14.6	15.4	17.1	18.7	19.9	18.8	16.8	15.2	15.4	15.8	4.3	995.1
80,0°	9.1	9.5	10.1	11.1	12.3	12.9	11.8	10.5	9.4	9.1	8.9	2.6	997.7
82,5°	5.4	5.6	5.9	6.1	6.3	6.2	5.8	5.2	4.7	4.5	4.4	1.4	999.1
85,0°	2.5	2.5	2.6	2.7	2.7	2.7	2.6	2.3	2.1	2.0	2.0	0.6	999.8
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight 20 mini LED	<b>Order number: 5XA7672C2A1AC</b> <b>EAN: 4058352221174</b>	<b>LP number</b> 58552_11
---	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	13030	95.8
95	240	252	12379	90.4
90	225	250	11728	85.1
85	211	247	11076	79.8
80	197	245	10425	74.6
75	184	242	9773	69.6
70	171	239	9122	64.6
65	157	236	8470	59.7
60	143	233	7819	55.0
55	132	230	7167	50.3
50	118	226	6516	45.7
45	106	222	5864	41.1
40	93	217	5212	36.7
35	81	212	4561	32.4
30	69	206	3909	28.1
25	57	199	3258	23.9
20	46	191	2606	19.7
15	34	180	1954	15.6