

Photometric test report

Family
DL® 50 mini LED

Order number: 5XA248C31F08KE
EAN: 4058352802472

LP number
59082_142



Version post-top or side-entry mounting
Optic asymmetric, wide distribution (ST0.8a G)
Cover toughened safety glass
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 5500 lm
 Power consumption = 32.1 W
 Luminous efficacy = 171.3 lm/W

serial
documentation
03.04.2023

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 536 cd/klm

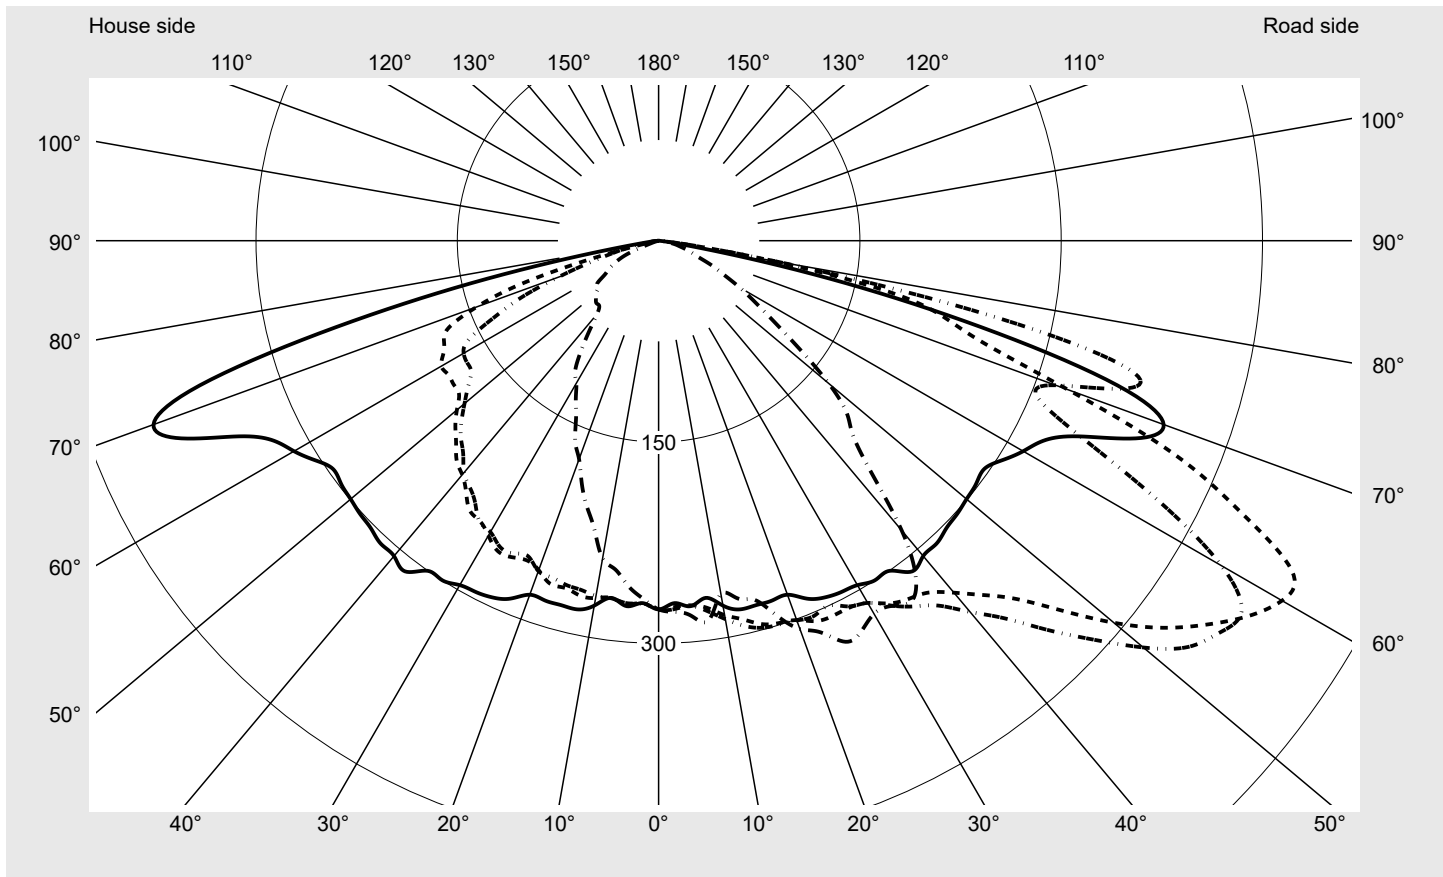

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	493.9
Imax 80°	97.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C31F08KE EAN: 4058352802472	LP number 59082_142
----------------------------------	------------------------------------------------------------------	-------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

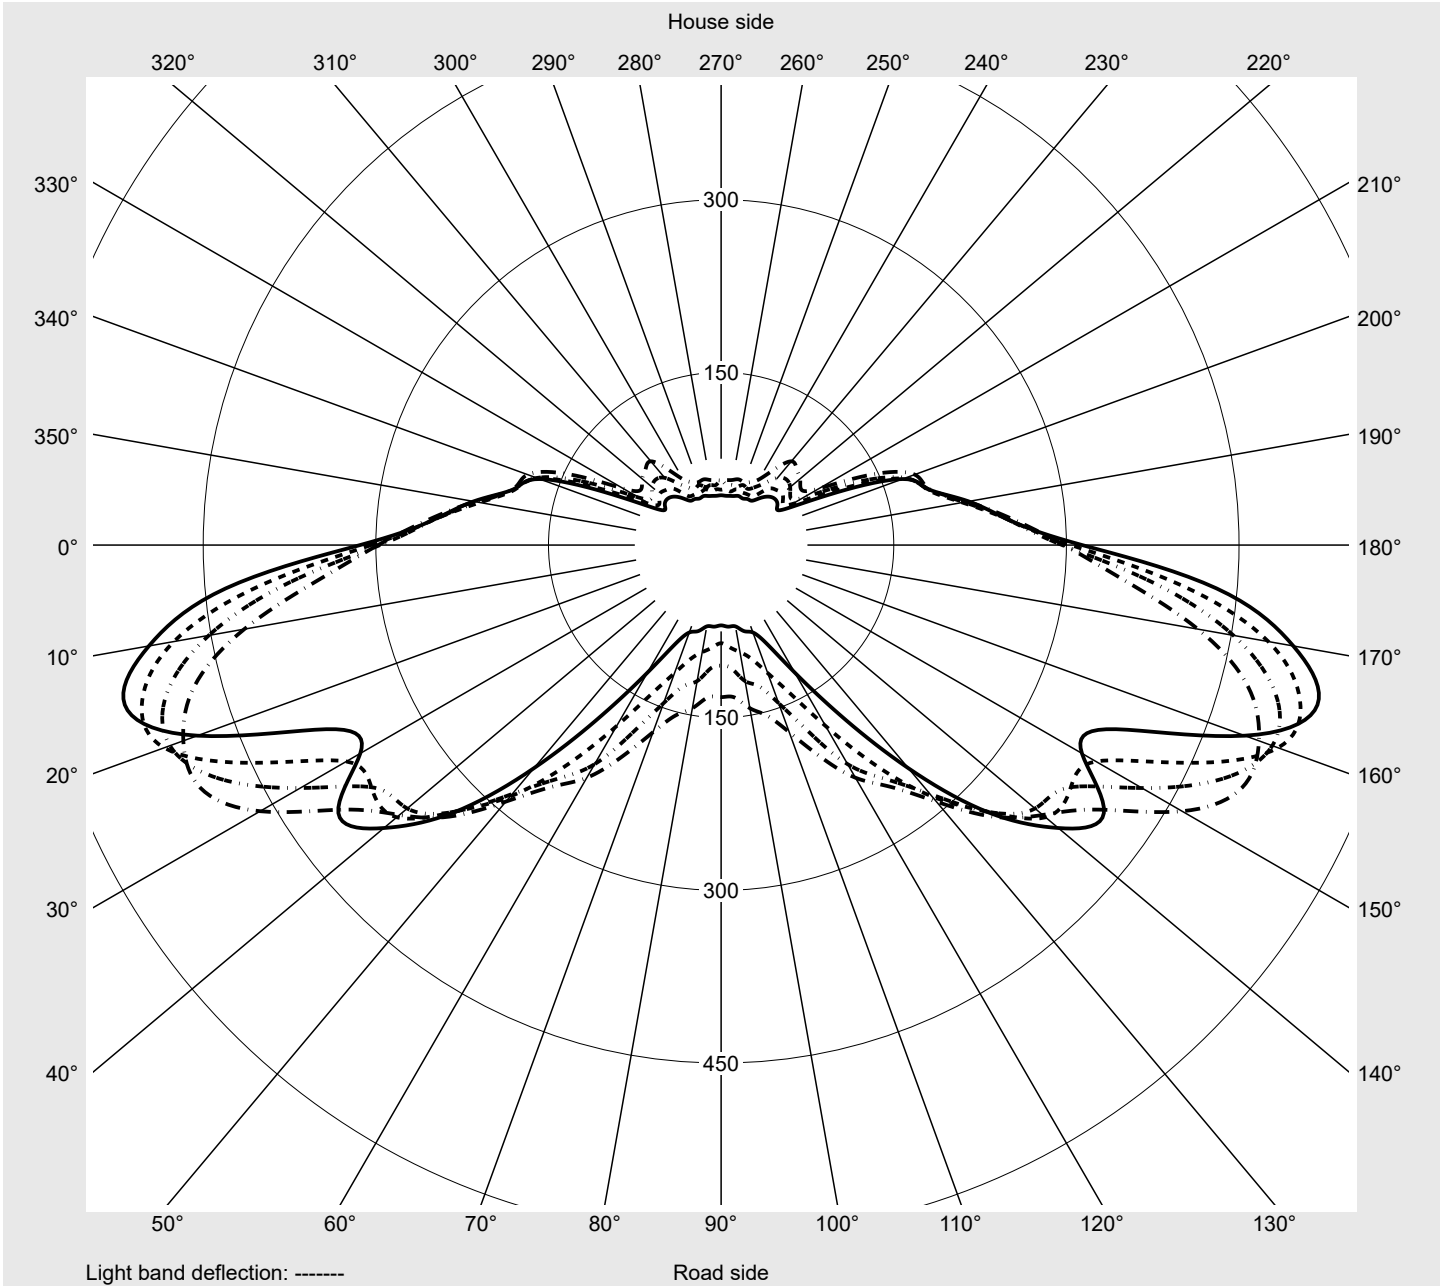

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C31F08KE EAN: 4058352802472	LP number 59082_142
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	270.3	270.4	271.5	273.2	274.7	274.7	274.1	274.2	274.4	274.0	277.0	277.1	276.6
5,0°	273.4	274.3	273.6	272.7	273.3	272.3	273.5	276.6	278.8	280.3	282.6	283.8	283.6
7,5°	268.4	272.0	274.5	275.9	278.4	281.1	280.9	281.1	283.3	281.4	281.4	282.2	283.4
10,0°	276.1	275.9	278.7	283.3	286.3	286.9	286.0	284.7	284.2	281.9	279.6	277.1	277.3
12,5°	281.3	282.2	283.7	288.9	293.9	293.8	293.7	291.9	286.3	284.1	279.7	275.7	274.4
15,0°	281.1	288.0	292.4	295.7	298.6	296.0	289.7	288.1	284.8	282.9	277.7	276.9	276.0
17,5°	281.1	290.6	297.2	298.7	299.8	298.7	288.5	285.6	284.8	283.6	284.4	283.4	282.6
20,0°	280.7	292.1	296.6	300.8	301.1	293.8	288.4	289.1	289.4	289.7	292.3	294.8	294.6
22,5°	288.7	295.6	305.2	306.8	302.6	291.6	294.7	298.4	296.3	302.0	304.4	307.3	310.9
25,0°	293.3	302.1	310.2	308.2	300.0	304.4	300.3	306.0	314.5	315.8	322.6	327.6	328.1
27,5°	295.1	304.0	315.6	308.2	307.2	309.0	311.5	316.2	322.4	331.3	341.0	342.3	347.8
30,0°	296.3	310.5	318.6	311.7	311.7	317.3	321.0	328.4	335.1	348.1	357.8	362.2	361.1
32,5°	300.0	316.4	321.2	320.4	322.3	332.0	333.6	347.0	358.3	367.3	373.3	381.7	372.6
35,0°	300.3	319.7	321.7	325.6	332.6	343.0	357.1	367.9	377.8	390.3	388.6	387.7	369.4
37,5°	310.5	323.4	327.5	330.5	342.7	360.8	372.5	392.7	414.1	412.2	402.6	386.6	372.5
40,0°	306.7	330.8	334.6	342.4	361.1	375.6	400.5	408.6	435.7	427.5	406.4	389.1	370.1
42,5°	306.3	335.9	340.9	358.1	381.7	400.9	421.0	435.6	445.3	435.6	399.0	382.7	355.5
45,0°	303.2	331.0	352.9	377.7	410.2	434.3	445.3	455.7	442.6	423.9	389.8	341.8	303.3
47,5°	301.6	336.5	377.0	408.1	440.1	460.6	469.6	457.4	422.0	387.5	349.8	300.0	258.6
50,0°	299.6	347.6	392.2	442.9	471.5	482.6	470.8	441.6	392.0	354.8	309.2	269.5	243.1
52,5°	298.1	351.8	420.7	473.8	497.3	499.2	462.5	400.7	364.8	333.6	290.9	256.4	233.4
55,0°	296.4	377.3	452.0	498.7	509.7	480.6	422.2	367.6	356.1	327.6	282.3	247.9	219.8
57,5°	304.1	401.5	482.8	520.7	515.0	447.7	376.1	370.2	367.9	327.8	285.1	233.0	181.5
60,0°	313.7	432.1	504.8	536.4	484.2	378.6	362.0	406.0	382.5	328.5	253.1	180.4	127.9
62,5°	323.0	454.5	522.9	531.9	420.3	344.5	406.4	437.2	400.9	298.6	180.8	103.7	72.0
65,0°	344.9	474.6	534.2	478.7	349.3	355.5	461.5	463.3	369.4	197.1	86.0	60.4	50.6
67,5°	384.9	502.1	523.3	416.2	305.9	418.2	501.2	453.1	243.9	95.6	57.8	47.3	41.7
70,0°	400.5	466.7	464.5	324.8	314.9	493.9	484.0	328.4	125.6	60.9	45.2	38.8	34.8
72,5°	358.5	358.7	351.8	254.6	365.9	485.2	394.2	184.1	76.3	45.4	33.5	30.2	27.1
75,0°	248.8	218.0	225.7	220.3	356.9	392.4	267.8	98.5	34.6	31.5	29.4	24.9	21.7
77,5°	130.6	113.0	145.7	175.3	240.1	233.3	127.5	42.6	21.2	23.4	23.0	16.7	15.6
80,0°	34.5	28.3	60.6	84.1	88.8	97.8	40.6	17.8	14.2	16.4	14.0	11.1	11.6
82,5°	7.5	5.6	9.8	16.6	21.5	20.4	10.9	7.9	8.8	8.6	8.9	5.8	7.0
85,0°	1.1	1.2	1.1	1.3	1.4	1.9	2.3	2.1	2.2	2.7	3.5	2.8	2.3
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C31F08KE EAN: 4058352802472	LP number 59082_142
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	277.3	277.3	277.6	276.6	277.0	276.8	270.8	271.1	270.4	270.8	270.2	268.3	267.7
5,0°	281.9	281.9	278.2	280.1	281.1	280.6	273.6	273.0	271.7	271.1	269.1	268.2	265.4
7,5°	283.5	282.9	281.4	281.0	282.1	285.4	268.8	268.8	268.5	268.8	266.7	267.0	264.4
10,0°	279.2	274.9	270.8	268.5	269.2	267.3	274.9	272.6	270.4	268.7	265.5	260.5	259.1
12,5°	272.1	272.1	273.6	269.2	269.2	273.1	277.7	274.5	270.9	266.6	261.3	260.1	257.8
15,0°	276.2	274.6	273.2	280.0	279.6	277.2	274.9	270.0	268.0	265.6	261.1	253.1	248.9
17,5°	285.8	287.0	285.3	286.6	289.2	292.9	272.7	272.3	268.1	263.3	259.7	253.3	247.5
20,0°	299.1	299.4	301.3	300.1	304.9	307.8	276.8	266.0	261.2	262.0	255.9	246.8	236.8
22,5°	313.3	316.0	319.4	316.6	317.2	315.9	280.7	268.4	257.6	254.4	250.0	238.1	227.3
25,0°	332.9	331.7	329.1	327.2	327.4	329.8	278.2	269.4	260.1	257.0	246.4	228.9	216.0
27,5°	347.9	343.4	339.0	334.3	330.1	327.7	279.9	264.3	260.3	256.8	239.8	225.1	209.4
30,0°	360.9	348.0	335.3	330.2	324.7	321.0	279.0	262.4	253.7	250.7	238.4	217.0	198.0
32,5°	362.6	347.1	334.4	330.4	326.1	322.8	284.1	262.1	247.8	248.2	226.8	210.6	193.3
35,0°	356.8	346.6	334.7	336.8	328.1	328.1	280.8	258.0	245.4	238.4	219.8	203.2	186.8
37,5°	357.5	341.5	333.2	324.9	314.7	314.6	279.2	255.9	235.7	231.4	214.7	193.6	178.6
40,0°	343.5	323.7	301.8	292.7	285.0	281.8	278.8	246.9	227.6	225.6	204.9	186.4	162.2
42,5°	311.3	283.7	259.6	245.5	240.5	235.1	275.8	245.2	222.6	215.5	197.8	175.8	147.6
45,0°	263.6	240.0	225.9	210.9	205.5	204.7	269.5	235.2	213.4	208.3	188.9	160.6	131.2
47,5°	233.5	212.2	205.2	196.9	185.3	190.2	264.3	230.8	205.4	199.3	173.8	140.3	115.6
50,0°	214.5	200.5	186.8	176.0	167.7	165.6	259.0	220.9	196.2	188.8	159.4	120.1	101.4
52,5°	202.4	173.0	153.3	144.0	132.9	132.1	254.9	217.3	187.5	179.0	145.3	98.1	84.8
55,0°	178.1	146.2	127.0	120.0	107.8	104.8	250.8	214.4	186.5	170.5	129.2	82.5	73.4
57,5°	142.5	118.4	102.4	94.4	89.3	85.3	251.0	212.9	185.8	169.2	115.7	71.1	65.4
60,0°	95.2	80.8	77.5	71.8	71.2	69.8	251.1	218.4	187.0	167.7	103.8	61.3	59.6
62,5°	58.0	54.8	52.2	54.7	53.3	54.6	253.1	214.1	180.6	159.5	93.9	56.2	53.4
65,0°	44.4	44.5	46.9	43.2	43.6	44.1	259.8	218.3	176.5	135.3	87.7	51.0	49.2
67,5°	38.9	35.1	35.0	34.1	33.4	32.4	277.4	228.7	169.2	111.0	72.7	44.8	40.8
70,0°	31.2	27.0	26.8	26.1	26.1	26.6	284.4	224.8	144.3	80.0	58.1	39.0	36.7
72,5°	24.4	22.5	22.5	20.4	21.1	21.5	265.5	198.7	107.9	53.5	43.1	34.7	32.8
75,0°	18.8	17.1	17.9	17.0	16.6	16.3	204.9	133.2	50.6	34.4	32.4	29.0	26.8
77,5°	14.7	13.5	12.8	12.5	12.8	12.8	119.2	54.2	11.6	23.6	21.2	18.0	18.4
80,0°	10.6	10.1	9.1	8.6	8.6	8.1	33.5	11.1	7.6	13.9	11.9	10.5	10.2
82,5°	7.3	6.2	6.1	5.6	4.9	5.4	5.5	2.7	2.8	3.8	4.3	3.5	2.3
85,0°	3.5	3.6	2.8	2.5	2.0	2.1	1.1	1.0	0.9	0.9	0.8	0.7	0.4
87,5°	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C31F08KE EAN: 4058352802472	LP number 59082_142
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	0.4	0.4
2,5°	266.9	268.1	268.2	268.7	268.5	267.1	267.0	267.7	267.4	266.6	267.0	3.3	3.7
5,0°	263.6	262.9	262.0	260.1	259.5	259.0	256.6	256.8	259.2	257.8	258.3	6.5	10.1
7,5°	260.8	257.0	250.7	249.7	247.6	246.8	246.7	245.8	245.3	247.7	247.1	9.6	19.8
10,0°	252.8	249.3	247.8	246.7	248.4	244.5	243.4	240.2	241.8	240.9	240.4	12.7	32.4
12,5°	253.4	252.4	245.5	238.4	237.7	235.4	233.8	229.5	224.3	224.0	220.7	15.7	48.2
15,0°	244.8	237.8	231.9	225.9	220.6	215.3	208.8	208.3	207.9	205.7	205.7	18.5	66.7
17,5°	234.5	223.9	215.9	208.8	204.9	202.3	197.0	195.4	195.9	193.7	190.2	21.4	88.1
20,0°	225.2	218.0	205.4	199.6	193.3	189.7	186.4	179.5	178.4	175.2	173.3	24.2	112.4
22,5°	216.7	204.6	199.4	191.6	182.0	178.9	173.7	168.4	165.9	162.8	162.3	27.2	139.6
25,0°	204.9	195.2	187.0	178.8	174.1	164.7	158.3	153.2	148.3	147.1	145.5	30.2	169.8
27,5°	196.3	186.4	178.9	166.9	161.7	149.4	143.4	139.0	134.8	135.6	133.7	33.1	202.9
30,0°	190.9	177.5	163.1	156.2	146.5	137.9	134.3	127.6	124.1	121.6	122.6	35.7	238.6
32,5°	181.0	165.6	154.2	144.9	134.1	130.0	128.2	124.1	121.8	116.9	115.9	38.6	277.2
35,0°	167.7	157.4	146.1	134.8	131.4	126.8	124.8	120.5	110.3	104.9	101.4	41.3	318.5
37,5°	156.7	145.7	133.9	129.2	129.2	125.7	115.5	103.4	94.2	86.0	85.0	43.7	362.2
40,0°	146.9	134.3	126.9	126.3	125.9	115.4	98.8	88.6	77.3	72.8	71.3	45.3	407.5
42,5°	136.5	122.6	122.7	123.6	114.3	99.3	84.3	75.2	69.8	69.3	65.6	46.2	453.8
45,0°	120.9	117.7	119.9	119.0	104.2	85.2	72.0	67.4	65.3	64.5	65.6	46.5	500.3
47,5°	109.1	110.0	113.2	107.7	88.8	73.6	66.8	64.8	64.8	63.5	63.4	46.7	547.0
50,0°	97.5	101.6	105.2	92.5	74.5	65.6	61.9	61.6	59.1	61.3	61.0	46.7	593.7
52,5°	89.6	92.9	95.0	80.0	65.9	60.3	58.1	59.1	57.5	56.6	56.1	46.3	640.0
55,0°	78.3	80.4	76.2	65.5	57.9	54.0	55.5	52.2	52.9	52.4	56.0	45.7	685.7
57,5°	69.5	67.7	63.9	52.8	49.8	49.5	49.4	50.2	47.3	48.6	48.1	45.3	730.9
60,0°	61.6	59.4	53.6	47.0	46.1	44.6	45.2	44.1	43.4	43.0	43.3	44.1	775.0
62,5°	55.6	50.3	44.1	41.3	40.6	40.9	40.9	39.6	40.9	39.1	37.9	42.3	817.3
65,0°	46.5	42.0	38.0	35.8	35.8	36.1	35.5	33.9	31.7	32.0	31.7	40.2	857.5
67,5°	39.5	36.1	31.5	29.7	29.9	29.1	27.9	25.5	23.3	22.3	22.6	38.2	895.8
70,0°	34.2	29.3	27.2	25.7	24.5	22.3	19.1	14.7	12.3	10.1	9.4	34.5	930.3
72,5°	27.0	24.4	22.8	20.1	17.7	12.1	9.4	6.3	4.4	4.3	4.3	28.9	959.1
75,0°	21.4	18.1	16.5	13.1	8.9	5.4	3.9	2.7	2.0	1.9	2.4	21.1	980.3
77,5°	15.3	10.9	8.3	5.4	3.5	2.1	1.3	1.0	0.9	1.0	1.4	12.6	992.9
80,0°	7.1	3.9	2.2	1.4	0.8	0.5	0.4	0.4	0.3	0.4	0.4	5.2	998.0
82,5°	1.4	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	1.5	999.6
85,0°	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C31F08KE EAN: 4058352802472	LP number 59082_142
----------------------------------	------------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5500	32.1	33.1	32.6
95	241	252	5219	30.3	31.2	30.8
90	229	250	4959	28.7	29.6	29.2
85	216	248	4677	27.0	27.8	27.4
80	203	246	4396	25.2	25.9	25.5
75	190	243	4114	23.5	24.2	23.8
70	178	241	3854	22.0	22.6	22.3
65	165	238	3573	20.2	20.8	20.5
60	152	235	3291	18.6	19.1	18.8
55	140	232	3031	17.1	17.6	17.4
50	127	229	2750	15.5	15.9	15.7
45	114	225	2469	13.9	14.3	14.1
40	102	221	2209	12.5	12.8	12.6
35	89	216	1927	10.9	11.2	11.0
30	76	210	1646	9.5	9.7	9.6
25	63	203	1364	8.0	8.2	8.1
20	51	195	1104	6.6	6.8	6.7
15	38	184	823	5.1	5.2	5.2
12	30	176	650	4.2	4.3	4.2