

# Photometric test report

**Family**  
Silica® 21

**Order number: 51MX34DB39SB**  
**EAN: 4058352889169**

**LP number**  
59283\_71




**Version** Suspended luminaire, reflector, black, direct-/indirect distribution, asymmetric distribution  
**Lamps** LED 3000 K | CRI ≥ 80  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 9600 lm  
 Power consumption = 65.6 W  
 Luminous efficacy = 146.3 lm/W

**serial documentation**  
02.08.2023



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 461 cd/klm**

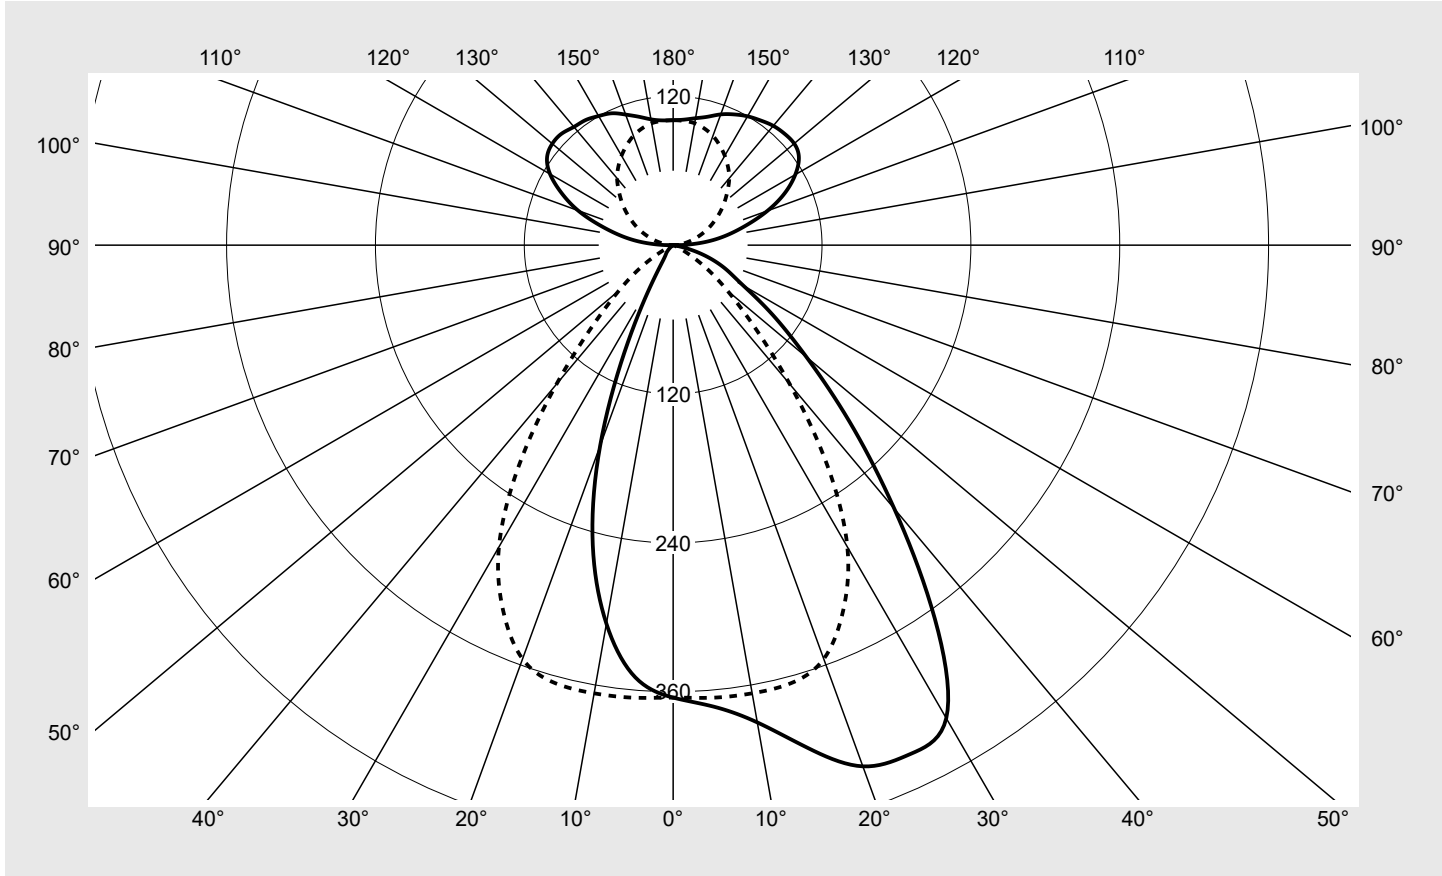

**Classifications**

DIN 5040	C 6 2
CIE	N1=74 N2=94 N3=99 N4=56 N5=100

**Luminaire light output ratios**

$\eta_{LB}$	100.0%
$\phi_u$	56.1%
$\phi_o$	43.9%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX34DB39SB</b> <b>EAN: 4058352889169</b>	<b>LP number</b> <b>59283_71</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
$\gamma$	Luminous intensity in cd/klm						
0°	364.7	364.7	364.7	364.7	364.7	364.7	364.7
5°	373.4	374.2	373.9	372.4	372.0	370.0	366.2
10°	390.7	390.9	390.3	389.7	385.4	375.2	366.9
15°	419.6	426.1	426.0	420.4	403.3	382.3	365.7
20°	447.1	456.4	458.5	446.1	411.0	376.9	355.0
25°	452.6	460.6	453.6	431.0	395.6	351.4	324.5
30°	440.3	439.8	430.3	390.5	349.9	308.3	280.9
35°	367.9	364.8	361.9	334.1	285.8	241.7	216.7
40°	277.4	282.5	289.0	275.8	227.9	175.0	146.3
45°	200.8	207.3	222.4	214.2	174.3	117.9	91.5
50°	140.2	148.6	163.4	159.9	127.4	79.2	57.1
55°	98.0	104.1	120.3	117.5	94.9	52.4	33.6
60°	65.5	71.2	86.2	87.8	71.3	30.8	14.6
65°	48.2	50.7	59.5	65.1	47.4	16.3	4.7
70°	32.8	36.4	42.5	43.7	27.4	8.4	1.8
75°	16.4	20.5	29.1	21.1	13.2	4.7	0.6
80°	2.7	3.9	8.6	8.4	6.0	1.9	0.3
85°	1.0	1.1	1.6	1.5	0.7	0.5	0.5
90°	5.1	4.9	5.2	5.1	3.1	1.0	0.4
95°	23.6	24.1	25.8	24.5	15.6	8.0	4.1
100°	42.3	43.3	43.7	38.5	25.8	14.5	9.5
105°	60.4	61.7	60.5	51.6	35.4	21.8	16.0
110°	80.9	81.7	76.3	63.6	45.4	29.6	23.0
115°	99.3	98.4	90.6	74.6	54.9	37.4	30.6
120°	113.7	112.0	102.2	83.3	64.1	44.9	38.1
125°	123.7	120.5	109.6	92.0	71.5	52.1	46.1
130°	127.4	124.7	113.0	96.3	77.5	59.5	54.0
135°	127.0	124.4	114.1	99.9	82.2	66.6	62.0
140°	125.6	123.2	114.1	102.3	86.1	73.2	70.3
145°	122.8	121.6	114.6	103.4	89.6	79.2	77.1
150°	119.9	119.3	113.7	103.5	92.3	85.0	83.2
155°	116.3	116.3	110.3	102.8	94.6	90.3	88.8
160°	112.2	112.1	106.9	101.9	96.9	93.8	93.7
165°	107.2	106.8	103.8	100.5	98.5	97.0	97.3
170°	103.9	102.9	102.2	100.5	99.8	99.7	99.8
175°	101.6	101.2	100.4	100.2	100.5	100.4	100.5
180°	100.7	100.7	100.7	100.7	100.7	100.7	100.7

## Photometric test report

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX34DB39SB</b> <b>EAN: 4058352889169</b>	<b>LP number</b> <b>59283_71</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	364.7	364.7	364.7	364.7	364.7	364.7	2.2	2.2
5°	362.9	358.9	355.8	351.9	350.5	349.8	17.4	19.6
10°	356.4	346.7	334.3	322.3	312.5	309.9	34.3	53.9
15°	351.5	329.8	301.2	272.8	255.4	250.3	50.5	104.3
20°	332.5	299.0	251.5	205.7	180.6	172.0	63.8	168.1
25°	300.5	247.9	184.7	134.5	99.3	86.1	70.5	238.6
30°	246.1	187.5	119.2	65.0	36.4	29.2	70.5	309.2
35°	174.7	119.3	62.2	24.9	14.0	12.2	62.6	371.8
40°	109.6	67.1	27.5	12.3	9.3	8.7	51.8	423.6
45°	65.7	34.8	12.8	8.3	6.4	5.9	40.7	464.3
50°	38.9	17.2	7.5	5.5	3.9	3.3	30.8	495.1
55°	21.5	8.7	4.7	3.3	2.1	1.8	22.9	518.0
60°	8.2	4.3	2.8	2.0	1.5	1.3	16.4	534.4
65°	2.7	2.1	1.7	1.4	1.0	0.7	11.5	545.9
70°	1.1	1.1	0.9	0.8	0.6	0.3	7.8	553.7
75°	0.4	0.5	0.5	0.4	0.4	0.3	4.4	558.1
80°	0.2	0.3	0.3	0.3	0.2	0.2	1.4	559.5
85°	0.5	0.5	0.6	0.6	0.6	0.6	0.4	559.9
90°	1.0	3.1	5.1	5.2	4.9	5.1	2.0	562.0
95°	8.1	15.6	24.4	25.8	24.1	23.5	10.2	572.1
100°	14.5	25.6	38.0	43.6	43.3	41.9	17.2	589.3
105°	21.9	35.3	51.6	60.4	61.7	60.5	23.8	613.1
110°	29.6	45.2	63.5	76.5	81.3	81.5	29.9	643.0
115°	37.4	55.0	74.7	90.7	98.3	99.2	34.9	677.9
120°	45.0	63.8	83.7	102.6	112.6	114.6	38.2	716.1
125°	52.1	71.5	91.4	109.3	120.5	124.0	39.7	755.8
130°	59.5	77.1	96.8	112.7	124.3	127.2	39.3	795.1
135°	66.2	81.6	99.7	114.1	124.5	127.1	37.5	832.6
140°	72.6	85.5	102.0	114.8	123.0	124.4	35.0	867.6
145°	78.7	89.2	103.4	114.2	121.7	123.1	31.9	899.4
150°	84.6	92.4	103.1	112.6	119.8	120.2	28.1	927.5
155°	89.7	94.6	103.0	110.2	116.6	117.3	23.8	951.3
160°	94.2	96.3	102.1	107.0	111.6	112.0	19.2	970.5
165°	97.4	98.7	101.2	104.4	106.4	107.2	14.4	985.0
170°	99.8	100.1	101.3	102.3	102.9	103.0	9.6	994.6
175°	100.7	100.4	100.7	100.9	101.1	101.0	4.8	999.4
180°	100.7	100.7	100.7	100.7	100.7	100.7	0.6	1000.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX34DB39SB</b> EAN: <b>4058352889169</b>	LP number <b>59283_71</b>
-----------------------------	--	------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.1	23.0	22.9	23.8	24.9	17.5	18.4	18.3	19.2	20.3
	3H	22.4	23.2	23.3	24.1	25.3	17.3	18.1	18.2	19.0	20.1
	4H	22.5	23.2	23.4	24.1	25.3	17.2	17.9	18.1	18.8	20.0
	6H	22.4	23.0	23.3	23.9	25.1	17.0	17.7	17.9	18.6	19.8
	8H	22.3	22.9	23.2	23.8	25.0	16.9	17.6	17.9	18.5	19.7
	12H	22.2	22.7	23.1	23.7	24.9	16.8	17.4	17.8	18.3	19.5
4H	2H	22.3	23.0	23.2	23.9	25.0	18.1	18.8	19.0	19.7	20.9
	3H	22.9	23.5	23.8	24.4	25.6	18.1	18.7	19.1	19.7	20.9
	4H	23.0	23.6	24.0	24.5	25.7	18.1	18.6	19.0	19.5	20.7
	6H	22.9	23.4	23.9	24.3	25.6	17.9	18.4	18.9	19.3	20.6
	8H	22.8	23.3	23.8	24.2	25.5	17.8	18.2	18.8	19.2	20.5
	12H	22.7	23.1	23.7	24.1	25.4	17.7	18.1	18.7	19.1	20.3
8H	4H	23.0	23.4	23.9	24.3	25.6	18.1	18.5	19.1	19.5	20.8
	6H	22.9	23.3	23.9	24.3	25.5	18.1	18.4	19.1	19.4	20.7
	8H	22.8	23.2	23.9	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	12H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	18.9	19.2	20.5
12H	4H	22.9	23.2	23.8	24.2	25.5	18.1	18.4	19.0	19.4	20.7
	6H	22.8	23.1	23.8	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	8H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	19.0	19.2	20.5

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1470 B = 49											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
$\gamma$	Luminance in cd/m <sup>2</sup>												
45°	37847.1	39066.6	41924.1	40365.0	32848.9	22219.0	17240.8	12382.6	6567.9	2406.2	1567.6	1215.3	1109.8
50°	29067.9	30810.4	33888.8	33146.8	26408.9	16415.6	11845.9	8064.2	3571.3	1552.6	1140.8	806.4	677.6
55°	22763.6	24190.8	27955.8	27307.0	22040.1	12165.8	7803.0	5001.4	2028.8	1096.5	776.1	479.4	412.9
60°	17451.9	18977.7	22985.1	23414.0	18995.8	8209.6	3899.2	2185.5	1136.6	756.0	524.0	408.9	347.9
65°	15195.7	15999.0	18754.9	20544.0	14954.8	5133.1	1478.7	858.1	677.7	537.7	435.2	322.6	214.1
70°	12794.7	14194.0	16548.5	17025.4	10672.5	3279.9	694.4	413.8	416.2	369.4	305.5	220.6	135.2
75°	8452.8	10540.4	14977.7	10871.5	6786.5	2443.9	319.3	210.1	256.4	244.6	225.5	182.3	147.3
80°	2097.6	3013.3	6611.4	6464.8	4610.5	1421.4	202.6	191.1	225.6	231.8	220.3	191.1	174.2
85°	1477.2	1640.8	2520.1	2347.3	1120.9	731.0	721.8	756.9	822.7	880.8	912.9	896.1	902.2

**Photometric test report**

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX34DB39SB</b> <b>EAN: 4058352889169</b>	<b>LP number</b> <b>59283_71</b>
------------------------------------	--	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

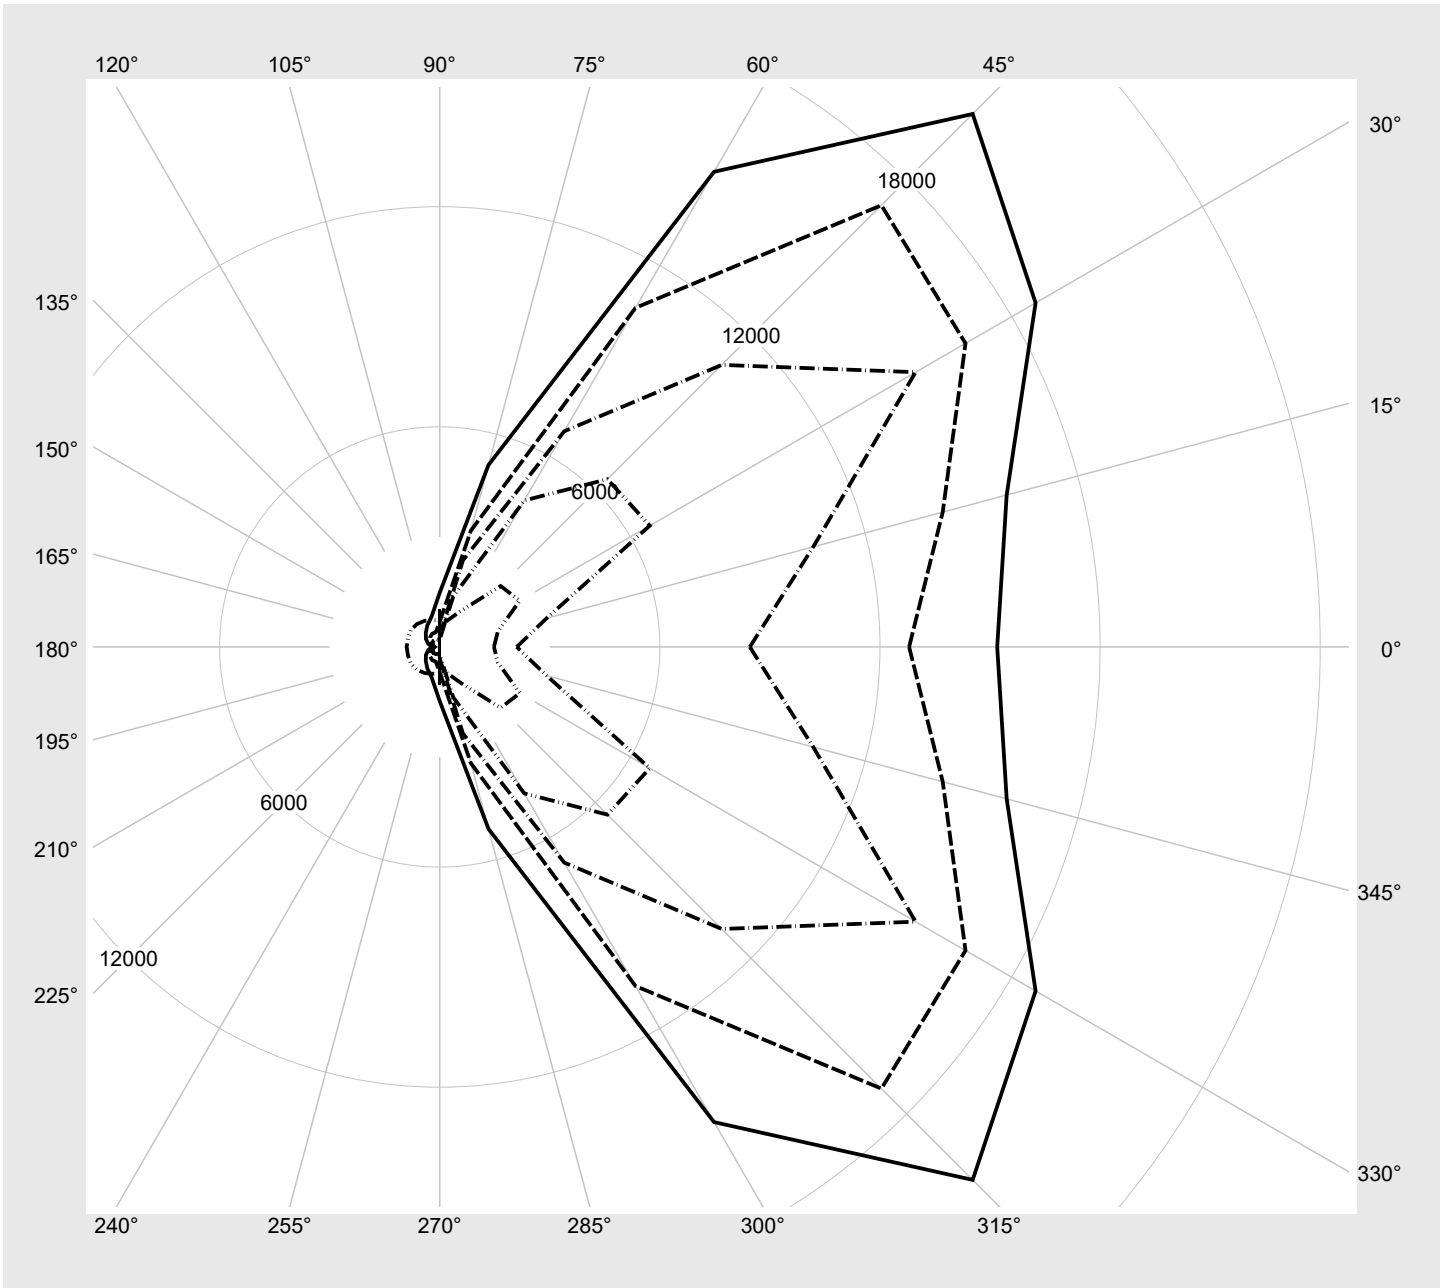

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX34DB39SB</b> EAN: <b>4058352889169</b>	LP number <b>59283_71</b>
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9600	65.6
95	240	252	9109	62.0
90	227	250	8649	58.7
85	213	248	8149	55.1
80	200	245	7680	51.9
75	187	243	7207	48.6
70	174	240	6730	45.2
65	161	237	6248	41.9
60	148	234	5763	38.7
55	135	231	5275	35.3
50	122	227	4782	32.1
45	110	223	4324	29.2
40	97	219	3824	26.0
35	85	214	3360	23.1
30	73	208	2892	20.2
25	60	201	2381	17.1
20	48	193	1906	14.0
15	36	182	1429	11.1
10	24	168	949	8.3
5	12	142	468	5.3
2	5	110	185	3.8