
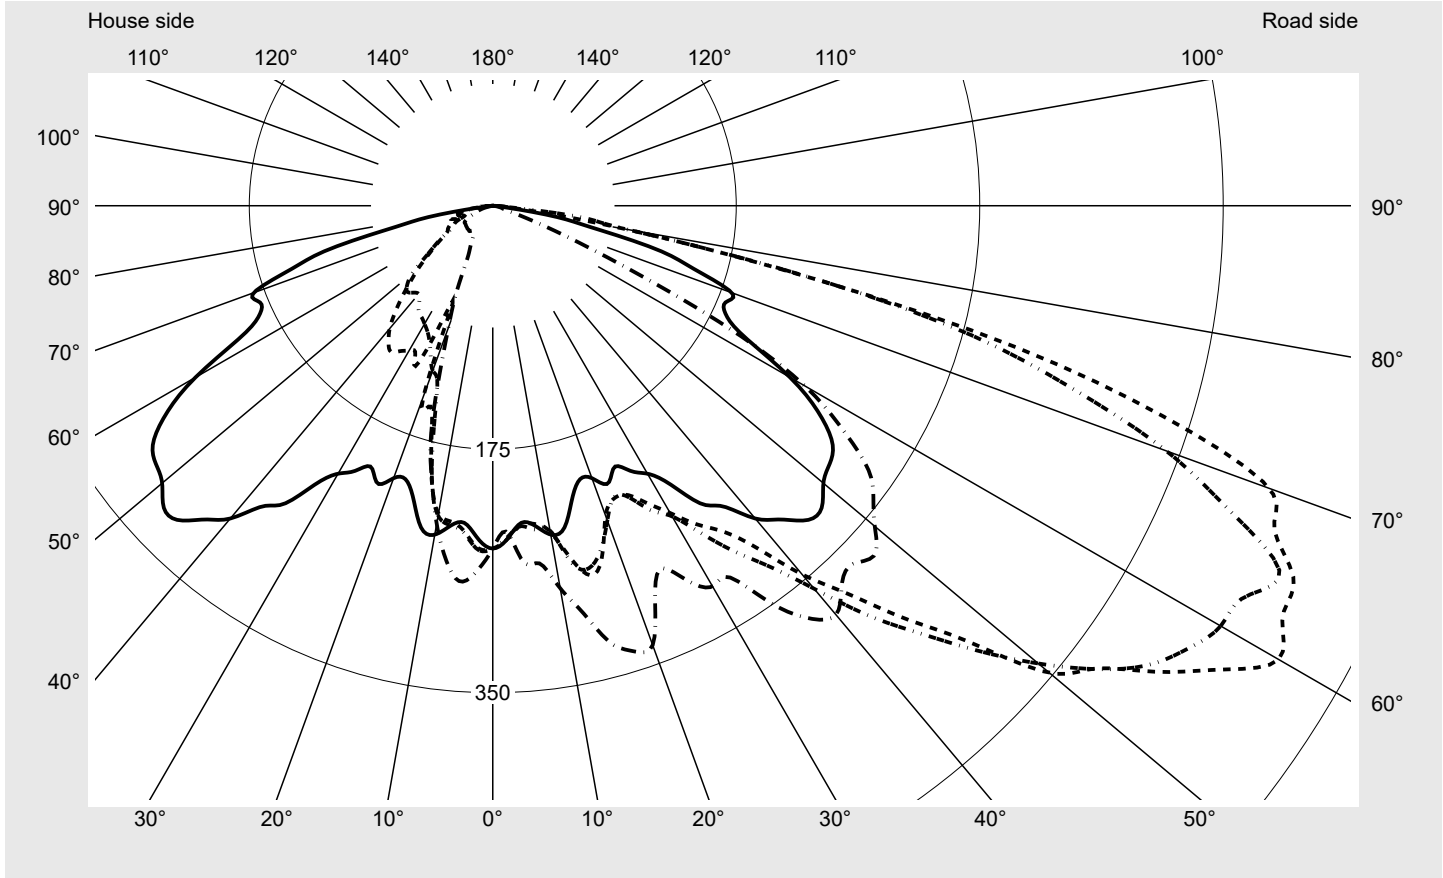


# Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> <b>58293_381</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 14840 lm Power consumption = 124.7 W Luminous efficacy = 119 lm/W	<b>serial documentation</b> <b>31.07.2023</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 652 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	593.9
Imax 80°	98.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> <b>58293_381</b>
--	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**



## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> <b>58293_381</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	239.8	240.0	240.1	239.7	240.0	239.8	238.6	237.2	236.7	236.5	235.6	235.3	234.4
5,0°	229.1	228.4	228.7	229.6	230.3	230.5	231.2	232.4	235.4	238.5	239.7	241.9	242.5
7,5°	231.9	232.6	231.2	229.7	229.3	230.7	234.7	239.7	244.4	248.4	250.9	254.0	255.3
10,0°	240.0	245.5	244.0	240.9	238.8	237.8	236.9	240.2	245.1	251.2	258.7	264.9	272.0
12,5°	237.3	248.6	259.0	262.1	260.8	259.9	262.9	262.2	260.3	267.2	276.2	282.6	282.7
15,0°	219.3	225.4	240.1	256.9	269.9	275.0	269.3	265.6	263.3	261.3	264.6	271.9	281.1
17,5°	206.8	214.9	231.6	247.1	254.2	262.3	258.8	252.0	246.2	242.9	244.5	247.3	257.3
20,0°	208.4	221.3	226.4	230.6	233.9	237.1	240.8	248.5	251.5	245.3	240.1	242.0	254.3
22,5°	216.1	219.3	220.3	223.1	226.9	227.7	227.1	227.7	235.4	240.6	242.8	248.2	253.0
25,0°	207.1	214.4	224.2	232.5	232.6	229.4	231.1	234.6	239.8	243.8	257.3	260.7	268.7
27,5°	215.0	225.1	225.5	231.9	237.3	241.3	246.8	251.6	257.6	266.8	281.0	288.8	303.3
30,0°	222.4	233.4	237.1	242.8	250.8	255.0	257.8	266.5	281.3	295.2	308.3	320.8	334.8
32,5°	237.4	244.8	245.8	249.4	262.0	271.1	279.1	290.5	312.4	328.5	340.2	345.4	356.7
35,0°	261.6	267.3	267.7	267.3	274.5	285.1	303.6	321.6	334.8	353.0	362.6	378.3	388.1
37,5°	272.5	277.6	279.9	285.7	293.6	308.5	326.9	345.0	359.7	372.7	387.7	420.5	413.3
40,0°	293.4	297.1	299.4	309.9	319.5	345.9	359.3	367.5	382.1	408.4	414.9	433.9	441.4
42,5°	305.8	310.7	318.2	336.2	353.8	378.6	399.4	400.4	400.5	427.8	436.5	449.4	450.6
45,0°	319.6	313.1	321.5	373.8	392.3	420.0	434.8	431.2	434.8	457.0	452.4	447.1	446.6
47,5°	320.8	309.8	325.1	385.4	419.7	463.8	473.6	464.3	469.8	469.4	456.5	443.9	445.2
50,0°	310.2	307.2	315.4	392.2	452.4	522.3	511.8	491.4	505.3	487.1	454.1	435.2	423.2
52,5°	305.1	301.6	326.9	413.0	512.4	546.3	547.1	524.7	530.1	506.6	457.9	420.1	397.8
55,0°	298.1	302.5	388.7	489.5	551.8	584.1	575.4	542.9	548.3	513.5	458.7	395.3	375.4
57,5°	278.3	306.9	409.1	507.8	582.3	620.5	592.4	554.8	536.8	492.4	436.5	370.2	343.0
60,0°	246.7	308.6	403.8	518.1	614.4	652.2	604.1	547.4	520.4	465.8	400.3	336.1	293.3
62,5°	203.8	309.3	401.4	514.5	592.8	640.0	609.1	568.3	505.6	448.4	370.3	308.4	244.7
65,0°	184.8	305.8	399.8	491.5	545.4	635.2	624.2	536.2	477.4	421.4	336.1	290.3	208.4
67,5°	181.2	300.3	385.2	455.9	537.1	608.0	573.8	499.7	429.1	379.6	303.5	252.0	174.7
70,0°	182.8	298.3	348.6	421.3	536.1	593.9	515.4	439.2	393.7	335.0	261.7	204.6	153.3
72,5°	152.3	295.2	340.0	415.6	464.5	507.8	436.8	365.4	336.0	281.8	215.0	165.1	137.1
75,0°	123.4	244.9	296.2	319.8	343.4	381.6	351.0	272.8	224.7	206.6	172.7	145.5	127.0
77,5°	74.5	181.8	192.1	227.4	191.9	217.5	221.5	172.7	139.2	141.8	115.3	105.6	88.0
80,0°	47.1	60.2	72.3	86.8	96.2	97.8	98.2	98.9	96.2	95.3	52.2	40.0	30.9
82,5°	9.3	12.5	13.4	18.9	18.9	29.8	65.1	93.0	67.0	41.5	23.5	16.6	10.9
85,0°	3.5	3.3	3.7	4.4	5.5	7.4	9.6	16.6	11.6	10.1	9.4	7.2	6.3
87,5°	2.3	2.4	2.6	2.9	3.1	3.3	3.6	4.1	4.4	4.0	3.8	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> <b>58293_381</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	234.1	233.5	232.9	233.4	234.2	235.0	241.0	242.5	243.2	244.5	246.1	247.4	248.1
5,0°	244.3	246.1	247.2	250.8	255.4	257.5	231.6	232.2	232.8	232.6	234.9	236.2	234.4
7,5°	259.1	260.3	263.4	262.6	260.8	259.4	230.1	229.9	228.3	227.7	229.0	231.6	231.0
10,0°	272.7	271.8	271.6	272.6	275.4	279.2	233.5	228.8	225.7	223.4	224.7	226.2	223.3
12,5°	285.6	286.2	290.0	295.9	298.0	299.6	227.2	221.3	214.0	207.4	202.7	202.1	203.7
15,0°	282.9	288.2	301.7	314.1	320.8	324.6	210.7	201.6	193.5	182.8	169.7	162.8	156.0
17,5°	275.5	290.1	300.8	317.3	329.9	335.7	199.0	192.5	185.9	171.1	151.0	132.5	124.4
20,0°	266.9	281.0	296.7	311.8	330.4	336.1	198.2	187.6	172.6	163.2	145.4	126.2	113.8
22,5°	264.4	276.4	296.7	308.8	307.9	304.8	194.5	174.3	162.8	143.5	74.0	116.6	98.7
25,0°	273.7	286.6	295.4	294.2	295.9	287.6	195.6	169.8	156.1	135.8	121.1	107.6	89.5
27,5°	302.2	308.3	307.5	302.6	297.9	304.0	195.8	178.3	162.7	136.6	120.6	101.8	83.5
30,0°	338.0	331.1	312.4	313.6	311.7	315.9	207.9	188.4	165.9	142.2	120.1	98.1	77.8
32,5°	351.6	334.4	325.1	337.0	328.7	316.6	224.1	203.2	170.7	147.0	123.9	95.1	73.8
35,0°	381.8	364.5	359.3	364.4	357.6	348.7	254.1	231.6	188.3	154.7	127.9	92.7	72.5
37,5°	400.8	388.8	368.5	359.8	364.8	373.8	263.8	240.0	192.1	161.1	123.0	86.7	73.2
40,0°	426.7	407.3	369.0	349.1	366.6	383.8	284.2	250.4	192.1	160.5	115.3	82.8	76.0
42,5°	445.4	405.8	374.1	350.6	367.9	371.2	294.9	249.1	189.9	153.0	103.8	84.7	76.8
45,0°	454.6	404.8	367.5	355.3	367.9	364.9	304.7	253.4	189.5	145.6	91.7	87.2	83.4
47,5°	444.2	397.0	350.0	356.6	373.5	371.9	285.3	245.8	183.2	123.3	79.8	83.2	80.6
50,0°	415.6	363.0	328.5	334.1	367.2	358.4	246.0	208.6	170.2	99.8	69.6	75.4	71.6
52,5°	377.0	341.7	305.5	319.2	337.4	344.8	245.2	210.0	153.6	79.9	59.0	62.0	59.4
55,0°	340.5	305.9	280.1	284.6	312.2	329.0	268.2	186.1	136.3	60.7	50.5	52.1	51.7
57,5°	304.7	261.3	234.1	233.3	280.3	297.2	220.2	138.9	101.2	52.2	43.1	44.3	44.4
60,0°	272.4	224.3	180.1	188.5	239.8	259.0	182.4	107.2	73.6	47.7	37.8	36.3	38.0
62,5°	220.8	167.7	135.7	140.5	177.7	194.5	144.0	86.7	60.7	46.5	36.4	32.0	31.7
65,0°	173.8	118.9	93.3	100.8	117.9	110.3	115.5	69.8	50.4	41.5	34.4	30.3	28.6
67,5°	127.0	81.4	58.3	50.3	53.2	55.8	112.4	66.9	43.1	33.6	31.4	26.8	22.4
70,0°	110.0	67.0	36.1	23.4	24.0	23.7	111.5	64.4	43.1	30.9	28.2	21.7	19.7
72,5°	95.0	38.0	20.3	11.1	10.3	9.3	90.0	56.0	44.0	38.4	31.8	23.7	19.8
75,0°	83.9	21.9	12.7	8.3	7.2	7.1	63.0	53.1	47.7	34.4	29.9	25.7	18.1
77,5°	31.9	15.2	9.0	6.5	5.7	5.5	54.2	48.4	47.2	30.9	25.1	22.1	16.2
80,0°	14.1	9.7	6.4	5.0	4.4	4.2	36.4	35.4	29.8	22.2	19.6	18.2	16.2
82,5°	9.0	6.6	4.7	3.7	3.2	3.1	9.7	11.3	14.2	14.6	15.4	11.1	10.4
85,0°	5.2	3.9	2.9	2.3	1.9	1.7	3.1	3.1	3.2	3.3	3.4	3.5	3.5
87,5°	3.0	2.2	1.5	1.2	1.0	1.0	2.2	2.0	2.0	2.0	1.9	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> 58293_381
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeCO</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	0.4	0.4
2,5°	249.5	252.2	254.7	257.5	259.7	261.3	261.3	261.3	262.1	262.4	262.8	2.9	3.3
5,0°	231.6	233.6	237.0	241.2	245.2	249.9	256.6	263.5	269.0	271.4	271.0	5.8	9.1
7,5°	225.8	225.3	227.9	229.8	234.2	239.7	243.5	246.5	250.9	255.1	256.9	8.6	17.7
10,0°	214.9	206.6	211.0	211.6	215.6	218.1	225.4	229.7	234.1	233.6	232.1	11.4	29.1
12,5°	205.5	194.6	195.1	193.5	195.4	200.0	205.8	215.1	216.6	206.7	202.2	14.2	43.3
15,0°	155.4	160.1	160.7	158.6	157.5	160.9	168.0	169.1	179.2	173.9	171.9	15.8	59.1
17,5°	121.8	123.5	125.8	124.8	119.6	125.9	127.1	123.3	124.5	126.5	127.6	16.7	75.9
20,0°	106.9	108.0	108.3	102.2	91.8	85.2	85.0	83.3	89.9	94.2	93.3	17.8	93.7
22,5°	90.5	90.6	95.5	88.8	77.0	70.1	67.6	63.8	62.9	62.6	70.1	18.6	112.3
25,0°	76.4	77.8	84.5	74.0	71.7	64.2	62.0	54.8	48.0	44.9	46.3	20.3	132.7
27,5°	68.7	60.3	56.3	57.6	57.9	53.0	52.5	44.8	39.0	37.0	36.1	22.7	155.4
30,0°	65.1	58.5	54.4	51.3	46.7	43.1	39.1	38.0	34.6	31.9	30.8	25.7	181.1
32,5°	63.3	57.4	53.7	46.9	39.3	34.9	32.3	30.9	29.7	28.1	26.3	28.9	210.0
35,0°	65.2	58.8	52.1	43.5	36.9	31.4	28.3	26.5	25.1	24.5	24.1	33.2	243.2
37,5°	66.6	58.3	50.3	42.4	36.2	31.2	26.4	24.9	23.6	24.2	23.4	36.8	280.0
40,0°	70.0	59.1	50.2	41.5	33.5	27.6	25.6	24.3	24.1	24.1	23.4	40.8	320.8
42,5°	71.2	59.5	50.3	40.5	32.6	27.3	24.6	24.4	24.3	23.8	24.8	44.5	365.3
45,0°	74.6	61.9	46.1	36.6	31.9	28.1	24.6	24.3	24.1	24.3	24.5	48.0	413.3
47,5°	70.1	55.1	41.9	34.0	30.1	27.6	24.8	24.2	24.2	24.2	24.6	50.6	463.9
50,0°	58.1	48.8	38.8	31.0	29.0	26.4	25.4	24.3	24.2	24.2	24.2	51.8	515.7
52,5°	49.6	43.2	33.6	28.2	25.7	25.8	25.3	24.1	24.3	24.7	24.1	53.3	569.0
55,0°	43.5	36.5	28.4	24.7	23.3	23.8	24.6	23.5	24.2	23.6	23.7	54.9	623.9
57,5°	36.2	29.1	22.9	20.4	21.4	22.1	23.1	22.7	22.9	23.1	23.6	53.9	677.8
60,0°	31.5	22.4	17.1	16.3	17.5	19.6	21.7	21.9	21.8	22.3	23.3	52.0	729.9
62,5°	25.2	17.7	13.2	12.8	14.7	17.2	19.3	19.4	19.7	20.4	20.9	49.2	779.1
65,0°	20.3	14.6	11.5	10.5	12.0	14.7	17.0	16.9	17.5	17.0	17.7	45.9	824.9
67,5°	18.1	13.7	10.7	9.4	10.0	11.5	13.5	14.1	14.8	13.6	14.4	41.9	866.8
70,0°	16.3	12.0	9.9	8.5	8.3	9.3	10.5	11.2	11.9	11.7	11.8	38.6	905.4
72,5°	14.7	10.9	8.3	7.1	6.8	7.7	8.1	8.4	9.0	9.3	9.3	34.1	939.5
75,0°	12.7	10.3	7.2	6.0	5.6	5.9	6.2	6.5	6.5	6.5	6.7	27.2	966.6
77,5°	10.4	7.6	5.8	5.1	4.5	4.1	4.4	4.6	3.7	3.2	3.1	18.1	984.8
80,0°	10.8	6.1	4.2	3.9	3.3	3.0	2.8	2.9	2.0	1.0	0.6	9.2	994.0
82,5°	7.4	4.7	3.4	2.9	2.5	2.2	1.9	1.9	1.1	0.6	0.4	4.3	998.3
85,0°	3.4	2.6	2.3	1.9	1.8	1.4	1.0	0.9	0.7	0.4	0.4	1.2	999.4
87,5°	1.6	1.5	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3A21F08ME</b> <b>EAN: 4058352558935</b>	<b>LP number</b> <b>58293_381</b>
--	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	14840	124.7	132.2	128.4
95	241	252	14080	117.0	124.0	120.5
90	229	250	13379	110.0	116.6	113.3
85	216	248	12620	102.7	108.8	105.8
80	203	246	11860	95.6	101.3	98.4
75	190	243	11101	88.7	93.9	91.3
70	178	241	10400	82.4	87.3	84.8
65	165	238	9640	75.8	80.2	78.0
60	152	235	8881	69.3	73.3	71.3
55	140	232	8180	63.4	67.1	65.2
50	127	229	7420	57.1	60.4	58.8
45	114	225	6660	50.9	53.9	52.4
40	102	221	5959	45.3	47.9	46.6
35	89	216	5200	39.3	41.6	40.4
30	76	210	4440	33.5	35.4	34.4
25	63	203	3681	27.8	29.3	28.6
20	51	195	2980	22.6	23.8	23.2
15	38	184	2220	17.1	18.0	17.6
13	33	179	1928	15.1	15.8	15.4