


Photometric test report

Family Round 21 S	Order number: 51MR34GD0421B EAN: 4058352881507	LP number 59508_3
	Version	Suspended luminaire, cover, opal, PMMA, symmetric extremely wide distribution, direct-/indirect distribution, aluminium housing, black
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 3490 lm Power consumption = 28.0 W Luminous efficacy = 124.6 lm/W
		serial documentation 08.11.2023
		

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 298 cd/klm

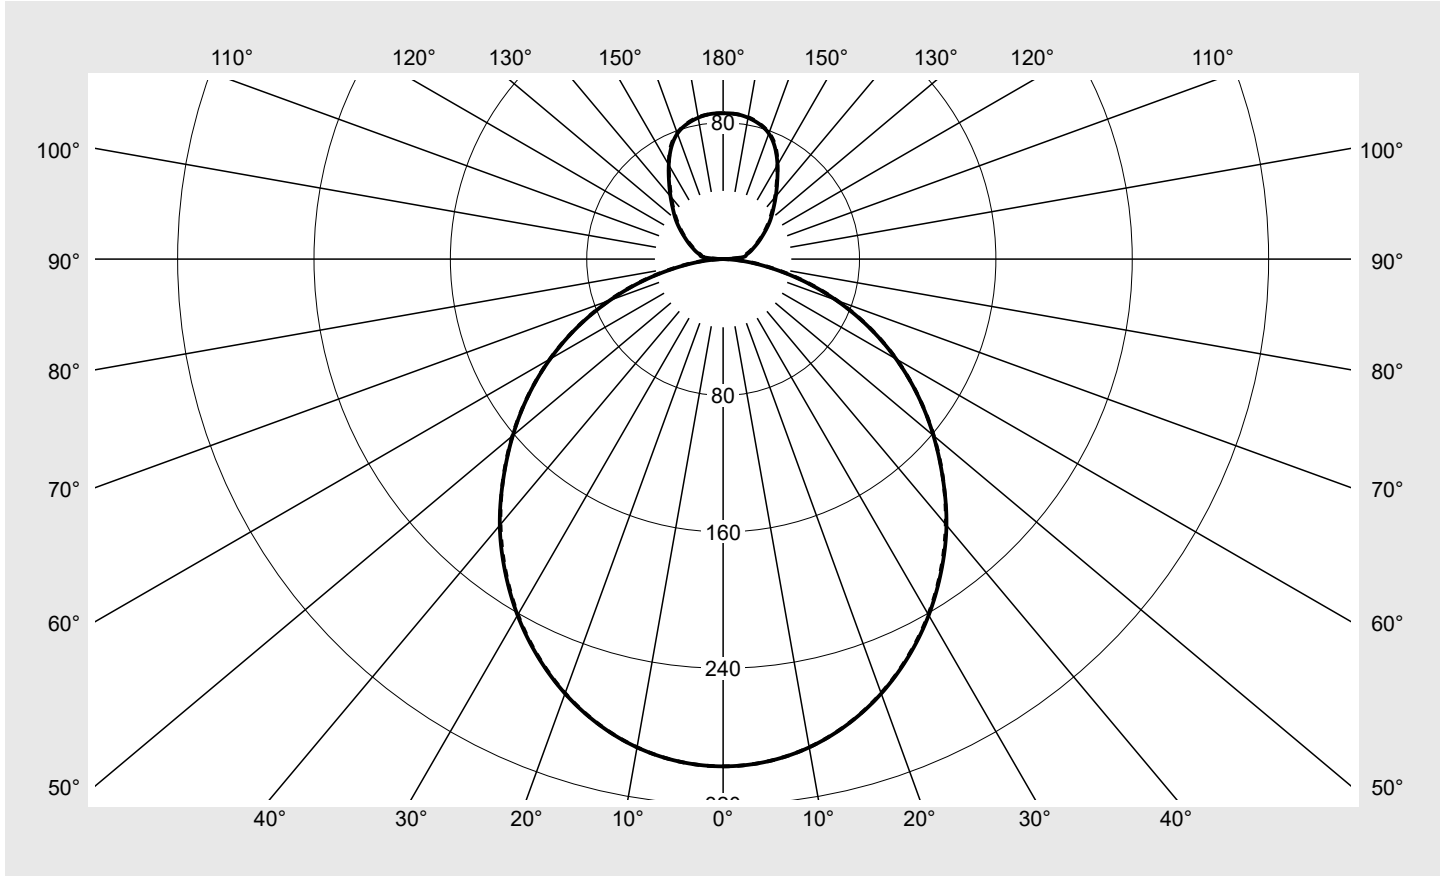

Classifications	
DIN 5040	B 4 3
CIE	N1=49 N2=80 N3=96 N4=79 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	79.2%
ϕ_o	20.8%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Round 21 S	Order number: 51MR34GD0421B EAN: 4058352881507	LP number 59508_3
-----------------------------	-----------------------------------------------------------------	-----------------------------



Table of values for luminous intensities	Maximum luminous intensity
-------------------------------------------------	-----------------------------------

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	297.6	297.6	297.6	297.6	297.6	297.6	297.6	1.8	1.8
5°	295.9	295.9	295.9	295.9	295.9	295.9	295.9	14.1	15.9
10°	290.8	290.9	290.9	290.8	290.8	290.7	290.8	27.7	43.6
15°	282.5	282.6	282.5	282.5	282.4	282.4	282.4	40.1	83.7
20°	271.2	271.3	271.2	271.1	271.0	271.0	271.0	50.8	134.5
25°	257.3	257.5	257.3	257.3	257.0	257.1	256.9	59.6	194.1
30°	241.2	241.5	241.2	241.1	240.8	240.8	240.8	66.1	260.2
35°	223.2	223.6	223.2	223.3	222.8	222.9	222.7	70.1	330.3
40°	203.8	204.3	203.8	203.9	203.3	203.7	203.2	71.8	402.1
45°	182.4	184.1	183.3	183.7	182.8	183.4	182.5	71.0	473.1
50°	161.1	162.9	162.1	162.4	161.6	162.2	161.3	68.1	541.2
55°	139.5	141.2	140.4	140.9	139.9	140.4	139.6	63.0	604.2
60°	117.2	118.9	118.0	118.6	117.6	117.9	117.4	56.0	660.3
65°	94.2	96.0	95.1	95.8	94.7	95.4	94.5	47.3	707.6
70°	70.7	72.8	71.7	72.5	71.4	72.3	71.3	37.1	744.6
75°	47.7	49.5	48.8	49.4	48.6	49.4	48.5	25.9	770.5
80°	26.4	28.1	27.8	28.2	27.7	28.0	27.6	15.0	785.6
85°	9.8	11.6	11.5	12.0	11.6	11.6	11.4	6.3	791.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	791.8
95°	10.6	11.0	10.6	10.8	10.4	10.4	9.8	5.8	797.6
100°	13.8	13.9	13.9	13.8	13.6	13.6	13.1	7.4	805.0
105°	16.2	16.5	16.4	16.5	16.3	16.3	15.6	8.6	813.6
110°	19.0	19.3	19.4	19.4	19.3	19.0	18.4	9.9	823.5
115°	22.4	22.8	22.7	22.8	22.6	22.4	21.8	11.2	834.7
120°	26.3	26.6	26.7	26.9	26.4	26.2	25.8	12.6	847.3
125°	31.1	31.2	31.0	31.4	30.8	30.8	30.4	13.9	861.2
130°	36.4	36.3	36.1	36.5	35.9	36.0	35.5	15.2	876.3
135°	41.6	41.8	41.8	41.9	41.8	41.8	41.1	16.2	892.5
140°	48.0	48.0	48.2	48.1	48.2	48.1	47.4	16.9	909.5
145°	55.3	55.0	55.3	55.3	55.2	55.2	54.9	17.3	926.8
150°	63.8	62.9	63.6	63.3	64.0	63.8	63.7	17.4	944.2
155°	72.1	72.2	71.9	72.9	72.4	72.8	72.7	16.8	961.0
160°	78.4	78.6	78.5	78.7	78.6	78.6	78.7	14.7	975.7
165°	82.0	82.0	82.1	82.0	82.1	82.2	82.3	11.6	987.4
170°	84.2	84.1	84.2	84.3	84.4	84.5	84.5	8.0	995.4
175°	85.4	85.3	85.3	85.4	85.4	85.4	85.4	4.1	999.5
180°	85.6	85.6	85.6	85.6	85.6	85.6	85.6	0.5	1000.0

Photometric test report

Family Round 21 S	Order number: 51MR34GD0421B EAN: 4058352881507	LP number 59508_3
-----------------------------	-----------------------------------------------------------------	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.0	19.3	18.6	19.9	20.6	17.9	19.2	18.5	19.9	20.6
	3H	19.4	20.5	20.0	21.2	22.0	19.4	20.5	20.0	21.2	22.0
	4H	20.0	21.1	20.7	21.7	22.5	20.0	21.1	20.6	21.7	22.5
	6H	20.4	21.4	21.1	22.1	22.9	20.4	21.4	21.1	22.1	22.9
	8H	20.5	21.4	21.1	22.1	22.9	20.5	21.4	21.2	22.1	22.9
	12H	20.5	21.4	21.2	22.1	22.9	20.6	21.5	21.3	22.2	23.0
4H	2H	18.6	19.7	19.3	20.3	21.1	18.6	19.7	19.2	20.3	21.1
	3H	20.3	21.2	20.9	21.9	22.7	20.2	21.2	20.9	21.8	22.7
	4H	20.9	21.8	21.6	22.5	23.3	20.9	21.7	21.6	22.5	23.3
	6H	21.5	22.2	22.2	22.9	23.8	21.5	22.2	22.2	22.9	23.8
	8H	21.5	22.2	22.3	22.9	23.8	21.5	22.2	22.3	22.9	23.8
	12H	21.7	22.2	22.4	23.0	23.9	21.7	22.3	22.4	23.0	23.9
8H	4H	21.2	21.8	21.9	22.6	23.4	21.1	21.8	21.9	22.5	23.4
	6H	21.7	22.2	22.5	23.0	23.9	21.7	22.2	22.5	23.0	23.9
	8H	21.9	22.4	22.7	23.2	24.1	22.0	22.4	22.7	23.2	24.1
	12H	22.2	22.6	22.9	23.3	24.3	22.2	22.6	23.0	23.4	24.3
12H	4H	21.2	21.8	22.0	22.6	23.5	21.2	21.8	22.0	22.6	23.4
	6H	21.9	22.3	22.6	23.1	24.0	21.9	22.3	22.6	23.1	24.0
	8H	22.1	22.5	22.9	23.3	24.2	22.1	22.5	22.9	23.3	24.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 390
------------------------	---------------------------------------------------	--------------------------------------	----------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		7534.9	7606.0	7572.6	7587.7	7551.8	7577.2	7540.8	
50°		7319.8	7403.6	7367.5	7382.3	7345.7	7370.4	7333.3	
55°		7103.0	7192.6	7149.1	7175.7	7126.2	7151.0	7112.8	
60°		6847.1	6948.7	6897.4	6932.3	6871.3	6891.5	6859.1	
65°		6509.3	6633.2	6571.4	6625.6	6546.1	6597.6	6533.7	
70°		6037.7	6214.9	6123.4	6190.1	6097.8	6179.0	6086.1	
75°		5383.4	5591.9	5507.2	5579.1	5488.5	5572.7	5480.1	
80°		4448.3	4735.7	4670.6	4742.1	4664.5	4704.1	4645.9	
85°		3283.3	3891.7	3838.1	4034.2	3887.4	3872.6	3815.3	

Photometric test report

Family Round 21 S	Order number: 51MR34GD0421B EAN: 4058352881507	LP number 59508_3
------------------------------------	-----------------------------------------------------------------	------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

