
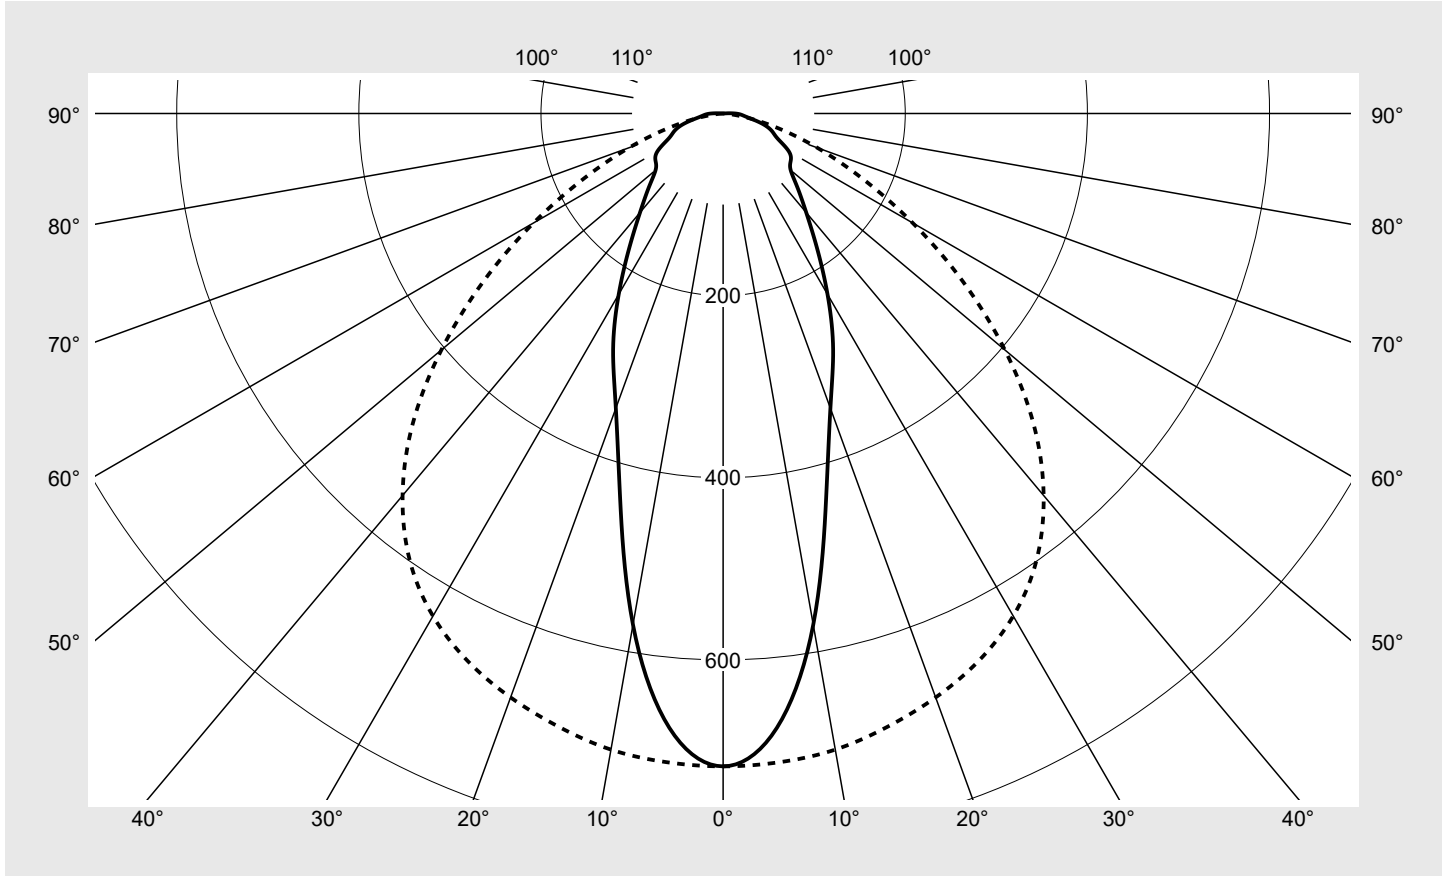


Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP470A EAN: 4058352933398	LP number 59504_3
	Version prismatic diffuser, opal, polycarbonate, elliptical medium distributon	serial documentation 06.11.2023
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 7310 lm Power consumption = 43.8 W Luminous efficacy = 166.9 lm/W	
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 717 cd/klm**



Classifications	
DIN 5040	A 5 1
CIE	N1=61 N2=86 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.7%
ϕ_o	0.3%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP470A EAN: 4058352933398	LP number 59504_3
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	4.3	4.3
5°	677.2	678.7	686.5	695.5	704.9	712.3	715.0	33.2	37.5
10°	570.0	577.9	600.9	634.1	668.5	697.1	709.3	60.6	98.1
15°	437.1	447.4	481.0	538.8	609.9	671.8	697.2	78.4	176.5
20°	344.4	351.8	375.2	431.4	529.7	635.0	682.3	88.6	265.1
25°	285.8	291.8	308.5	345.6	439.1	581.6	663.5	94.3	359.4
30°	229.3	235.5	255.1	285.5	352.1	516.0	637.2	94.9	454.3
35°	179.3	185.5	204.4	236.0	285.1	440.2	599.7	91.2	545.5
40°	142.0	146.9	162.0	190.0	233.1	361.6	547.6	84.5	630.0
45°	115.8	119.0	129.0	151.6	189.6	285.9	482.1	75.8	705.8
50°	96.9	97.9	105.1	121.4	151.9	220.0	403.8	66.2	772.0
55°	90.6	88.1	86.8	99.8	118.3	167.4	321.2	57.4	829.4
60°	83.4	80.5	76.4	81.9	95.1	124.0	240.4	49.0	878.4
65°	66.7	67.8	66.1	66.3	76.2	88.1	168.2	39.9	918.3
70°	57.3	58.4	55.3	53.7	53.5	59.5	110.0	31.3	949.6
75°	45.6	46.2	46.2	45.5	34.7	34.0	62.9	23.0	972.6
80°	29.6	30.8	29.4	27.5	20.8	16.7	27.8	13.8	986.4
85°	21.3	21.6	22.1	18.4	12.4	7.2	5.5	8.7	995.1
90°	13.3	13.0	12.5	10.3	6.2	2.6	1.6	4.7	999.8
95°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
100°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
105°	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
110°	0.0	0.0	0.1	0.0	0.1	0.1	0.1	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP470A EAN: 4058352933398	LP number 59504_3
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.7	16.2	15.1	16.5	16.9	20.6	22.1	20.9	22.4	22.8
	3H	16.2	17.6	16.6	18.0	18.3	21.7	23.0	22.0	23.4	23.7
	4H	16.9	18.2	17.3	18.6	19.0	22.0	23.3	22.4	23.6	24.0
	6H	17.4	18.6	17.8	19.0	19.4	22.3	23.4	22.7	23.7	24.1
	8H	17.6	18.7	18.0	19.1	19.5	22.4	23.4	22.8	23.7	24.1
	12H	17.8	18.8	18.2	19.2	19.7	22.4	23.3	22.8	23.7	24.1
4H	2H	15.6	16.8	16.0	17.2	17.5	20.6	21.9	21.0	22.2	22.6
	3H	17.2	18.3	17.7	18.7	19.1	21.7	22.8	22.1	23.2	23.6
	4H	18.1	19.0	18.5	19.4	19.9	22.1	23.1	22.6	23.5	23.9
	6H	18.6	19.5	19.1	19.9	20.4	22.3	23.2	22.8	23.6	24.1
	8H	18.9	19.7	19.3	20.1	20.6	22.4	23.1	22.9	23.6	24.1
	12H	19.1	19.8	19.6	20.2	20.7	22.4	23.1	22.9	23.5	24.0
8H	4H	18.4	19.2	18.9	19.6	20.1	22.1	22.9	22.6	23.4	23.8
	6H	19.1	19.8	19.6	20.2	20.7	22.4	23.0	22.9	23.5	24.0
	8H	19.4	20.0	19.9	20.5	21.0	22.4	23.0	22.9	23.5	24.0
	12H	19.8	20.2	20.3	20.7	21.3	22.5	22.9	23.0	23.4	24.0
12H	4H	18.5	19.1	19.0	19.6	20.1	22.1	22.8	22.6	23.3	23.8
	6H	19.2	19.7	19.7	20.2	20.7	22.4	23.0	22.9	23.4	24.0
	8H	19.6	20.0	20.1	20.5	21.1	22.5	22.9	23.0	23.4	24.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1580	H(C0) = 50	H(C180) = 50
			B = 155	H(C90) = 50	H(C270) = 50

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		3695.4	3805.1	4204.5	5118.6	6731.9	10832.2	19726.5	
50°		3249.1	3292.6	3609.3	4342.4	5758.2	8992.3	18071.5	
55°		3228.1	3149.1	3177.9	3825.4	4850.3	7491.2	15991.9	
60°		3192.9	3090.8	3019.3	3408.2	4277.1	6181.1	13604.0	
65°		2782.7	2842.5	2858.4	3046.2	3832.3	4997.8	11127.5	
70°		2650.2	2715.0	2663.8	2777.1	3076.2	3953.9	8831.2	
75°		2386.5	2426.6	2533.1	2714.9	2348.6	2753.7	6488.4	
80°		1798.7	1880.4	1891.1	1955.3	1723.0	1740.3	4044.7	
85°		1554.6	1592.3	1731.1	1630.3	1340.8	1072.0	1382.0	

Photometric test report

Family Monsun® Ex	Order number: 51FXB1DP470A EAN: 4058352933398	LP number 59504_3
------------------------------------	--	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

