


Photometric test report

Family Monsun® Ex	Order number: 51FXB27L640A3G EAN: 4058352933572	LP number 59498_23
	Version prismatic diffuser, opal, polycarbonate, diffuse beam, emergence lighting 3h	serial documentation 14.11.2023
	Lamps LED 6500 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4500 lm Power consumption = 29.2 W Luminous efficacy = 154.1 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 301 cd/klm**

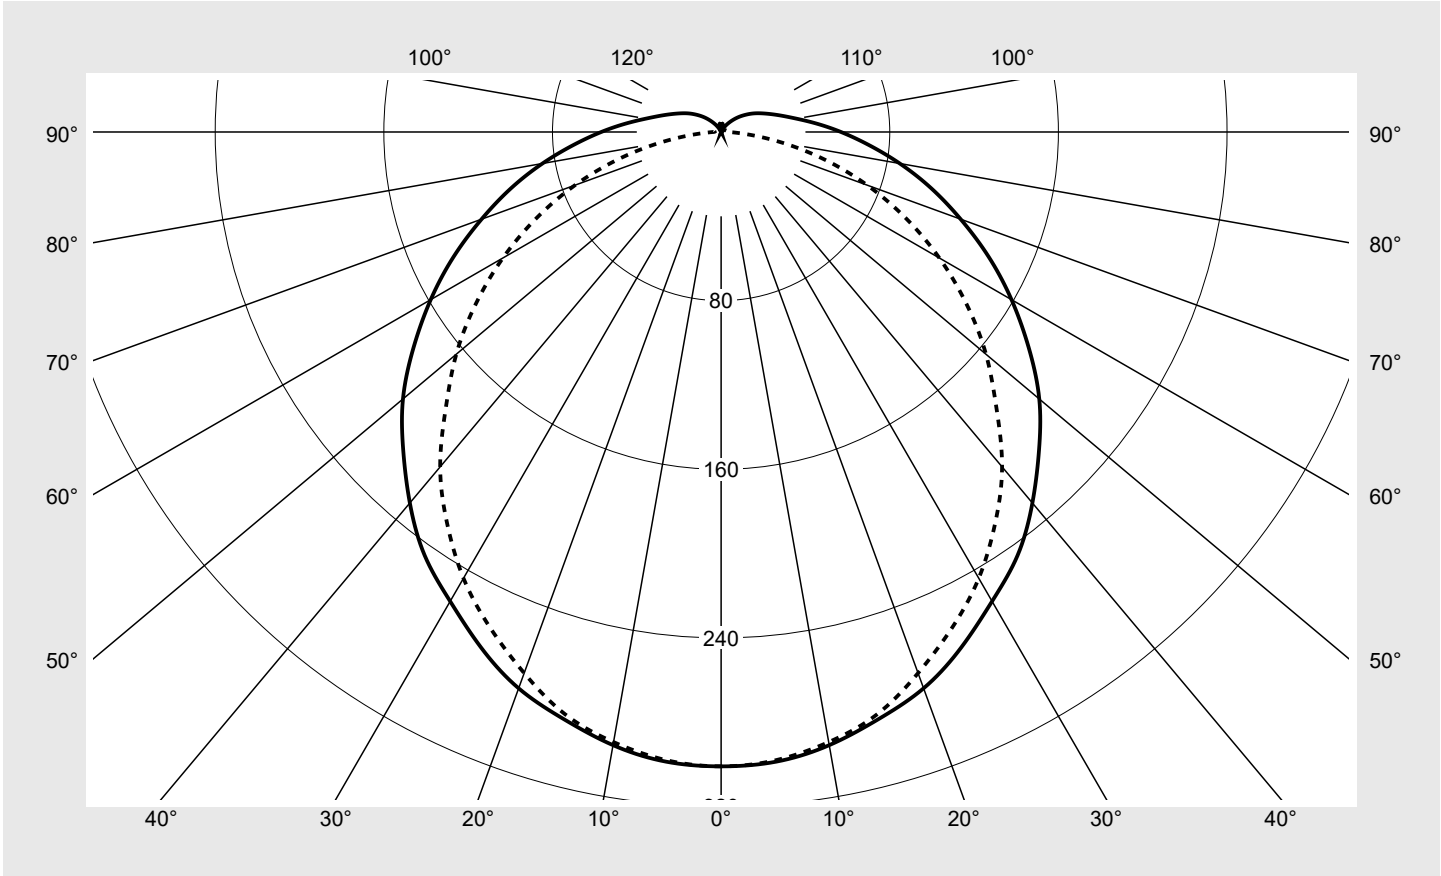

Classifications	
DIN 5040	A 3 1
CIE	N1=43 N2=73 N3=91 N4=93 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	93.0%
ϕ_o	7.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® Ex	Order number: 51FXB27L640A3G EAN: 4058352933572	LP number 59498_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	300.9	300.9	300.9	300.9	300.9	300.9	300.9	1.8	1.8
5°	299.8	298.9	299.8	299.4	299.3	299.3	299.1	14.3	16.1
10°	295.4	295.5	295.7	294.7	294.9	294.7	293.9	28.1	44.2
15°	288.4	288.5	288.4	287.2	286.8	286.6	286.0	40.8	85.0
20°	280.8	279.8	278.9	277.6	275.9	275.3	273.2	52.0	137.0
25°	269.7	268.9	267.9	266.0	263.0	261.1	259.4	61.4	198.4
30°	257.1	257.4	254.0	251.9	248.4	245.2	244.4	68.9	267.3
35°	245.2	243.2	240.2	235.1	230.9	227.9	226.6	74.1	341.3
40°	229.7	228.0	223.6	219.0	212.7	208.6	207.4	77.0	418.3
45°	213.3	211.0	207.0	200.7	193.6	188.6	184.6	77.5	495.8
50°	197.0	194.3	189.0	181.2	173.5	167.2	164.0	76.0	571.8
55°	178.1	175.9	170.2	161.5	152.6	145.9	142.0	72.3	644.1
60°	159.1	156.9	150.3	141.6	131.4	123.3	119.5	66.7	710.8
65°	140.0	137.3	130.4	120.8	110.2	101.5	96.6	59.5	770.3
70°	120.9	118.1	110.8	100.1	89.0	78.7	73.7	51.0	821.2
75°	103.2	100.1	92.1	80.5	67.9	57.2	51.1	41.9	863.2
80°	86.1	82.8	74.6	62.5	49.3	37.0	29.7	32.8	895.9
85°	70.2	67.5	59.4	47.5	33.8	20.5	12.2	24.6	920.5
90°	56.9	54.1	46.6	35.5	23.0	10.9	3.7	18.3	938.8
95°	45.5	43.2	36.5	26.9	16.3	7.1	3.3	14.1	952.9
100°	36.3	34.5	29.0	21.0	12.7	5.4	2.9	11.0	963.9
105°	29.8	28.1	23.6	17.3	10.4	4.1	2.6	8.8	972.7
110°	24.9	23.5	19.8	14.5	8.3	3.0	2.3	7.1	979.8
115°	21.0	19.9	16.7	11.9	6.5	2.1	2.0	5.7	985.4
120°	17.6	16.5	13.7	9.5	4.8	1.7	1.8	4.4	989.9
125°	14.3	13.3	10.8	7.2	3.2	1.5	1.6	3.3	993.2
130°	11.2	10.4	8.2	5.1	1.9	1.3	1.3	2.3	995.5
135°	8.3	7.6	5.7	3.1	1.0	1.1	1.2	1.5	997.0
140°	5.6	5.1	3.6	1.6	0.9	1.1	1.1	0.9	997.9
145°	3.5	3.0	1.9	0.9	1.0	1.2	1.2	0.5	998.4
150°	1.6	1.3	0.8	0.8	1.0	1.1	1.1	0.3	998.7
155°	1.0	1.0	0.9	1.0	1.0	1.1	1.1	0.2	999.0
160°	1.3	1.3	1.4	1.4	1.3	1.2	1.2	0.2	999.2
165°	2.6	2.6	2.5	2.4	2.1	1.9	1.8	0.3	999.5
170°	4.0	3.9	3.7	3.4	3.1	2.8	2.7	0.3	999.8
175°	3.2	3.1	3.0	2.9	2.8	2.7	2.6	0.1	1000.0
180°	2.4	2.4	2.4	2.4	2.4	2.4	2.4	0.0	1000.0

Photometric test report

Family Monsun® Ex	Order number: 51FXB27L640A3G EAN: 4058352933572	LP number 59498_23
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	---------------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.9	19.6	18.2	19.9	20.3	17.4	19.1	17.7	19.4	19.7
	3H	19.8	21.4	20.2	21.7	22.1	18.9	20.5	19.3	20.8	21.2
	4H	20.7	22.2	21.1	22.5	22.9	19.5	21.0	19.9	21.3	21.7
	6H	21.6	23.0	22.0	23.3	23.7	19.9	21.3	20.3	21.7	22.0
	8H	22.0	23.3	22.4	23.7	24.1	20.0	21.4	20.4	21.7	22.1
	12H	22.4	23.6	22.8	24.0	24.4	20.1	21.4	20.5	21.8	22.2
4H	2H	18.6	20.1	19.0	20.4	20.8	18.2	19.7	18.6	20.0	20.4
	3H	20.7	22.0	21.1	22.4	22.8	19.9	21.2	20.3	21.6	22.0
	4H	21.7	22.9	22.2	23.3	23.8	20.6	21.8	21.0	22.2	22.6
	6H	22.8	23.8	23.2	24.3	24.7	21.1	22.2	21.6	22.6	23.1
	8H	23.3	24.2	23.8	24.7	25.2	21.3	22.3	21.8	22.7	23.2
	12H	23.8	24.6	24.3	25.1	25.6	21.4	22.3	21.9	22.8	23.2
8H	4H	22.1	23.1	22.5	23.5	24.0	21.1	22.1	21.6	22.5	23.0
	6H	23.3	24.1	23.8	24.6	25.1	21.8	22.6	22.3	23.1	23.6
	8H	23.9	24.7	24.4	25.2	25.7	22.1	22.8	22.5	23.3	23.8
	12H	24.6	25.2	25.1	25.7	26.2	22.2	22.9	22.7	23.4	23.9
12H	4H	22.1	23.0	22.6	23.5	24.0	21.2	22.1	21.7	22.5	23.0
	6H	23.4	24.1	23.9	24.6	25.1	22.0	22.7	22.5	23.2	23.7
	8H	24.1	24.7	24.6	25.2	25.8	22.3	22.9	22.8	23.4	24.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:		L = 1280	H(C0) = 50	H(C180) = 50
				B = 155	H(C90) = 50	H(C270) = 50

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		5172.9	5121.2	5111.1	5127.2	5194.8	5396.2	5699.7		
50°		5021.6	4956.0	4917.5	4899.1	4968.1	5156.2	5530.0		
55°		4821.1	4765.9	4716.2	4678.1	4719.2	4918.3	5318.9		
60°		4629.5	4571.5	4491.4	4450.7	4455.1	4624.2	5078.7		
65°		4441.9	4360.8	4263.2	4188.2	4170.5	4322.4	4784.5		
70°		4251.6	4155.7	4034.4	3897.2	3843.5	3917.0	4416.7		
75°		4103.8	3987.3	3813.8	3610.9	3444.1	3452.0	3911.6		
80°		3972.7	3829.5	3617.8	3333.9	3054.5	2862.8	3180.7		
85°		3899.3	3753.6	3502.6	3153.3	2725.9	2239.3	2194.6		

Photometric test report

Family Monsun® Ex	Order number: 51FXB27L640A3G EAN: 4058352933572	LP number 59498_23
------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

