

Photometric test report

Family Monsun® 21	Order number: 51FB30DP460B EAN: 4058352520314	LP number 59013_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	2.1	2.1
5°	349.0	348.0	345.9	347.3	348.9	348.8	349.1	16.6	18.7
10°	343.1	342.7	340.7	342.3	343.9	344.0	344.2	32.6	51.4
15°	333.2	333.4	331.6	333.4	335.2	335.4	335.8	47.4	98.7
20°	319.1	319.9	318.4	320.5	322.7	323.2	323.7	60.2	158.9
25°	300.9	302.3	301.1	303.5	306.2	307.2	307.9	70.4	229.4
30°	279.7	281.4	280.3	282.7	285.9	287.4	288.4	77.7	307.1
35°	256.2	258.1	257.1	258.9	262.0	263.8	265.1	81.8	388.9
40°	232.4	233.8	232.7	233.2	235.7	237.7	239.0	82.7	471.6
45°	208.5	209.2	207.5	206.2	207.4	208.7	210.5	80.7	552.2
50°	185.3	185.4	183.1	180.1	179.1	179.0	180.6	76.3	628.5
55°	163.0	162.4	159.5	154.8	151.6	149.7	150.8	70.0	698.5
60°	141.8	140.8	136.8	130.7	125.6	121.9	121.9	62.3	760.8
65°	122.2	120.9	115.6	108.1	101.6	96.2	94.8	53.9	814.7
70°	103.6	102.2	95.5	87.0	79.2	72.5	69.8	44.9	859.6
75°	85.5	83.7	76.7	67.5	58.3	50.8	46.8	35.6	895.2
80°	67.6	65.6	59.5	49.4	39.4	31.1	26.3	26.3	921.4
85°	51.6	49.7	44.2	34.8	24.1	15.2	9.9	18.1	939.5
90°	40.0	38.5	33.8	25.4	15.4	6.7	1.8	12.9	952.4
95°	33.4	32.2	28.6	21.7	12.9	4.9	1.6	10.7	963.1
100°	28.1	27.1	23.9	18.1	10.6	3.5	1.4	8.8	971.9
105°	23.6	22.7	19.8	14.8	8.2	2.2	1.2	7.1	979.0
110°	20.0	18.9	16.3	11.8	6.0	1.3	1.1	5.6	984.5
115°	16.9	15.8	13.4	9.2	4.2	1.2	1.1	4.4	988.9
120°	14.0	13.0	10.7	6.9	2.6	1.1	1.0	3.3	992.2
125°	11.3	10.3	8.1	4.8	1.5	1.1	0.9	2.4	994.6
130°	8.7	7.8	5.8	3.1	1.3	1.0	1.0	1.7	996.2
135°	6.2	5.5	3.8	1.8	1.4	1.0	1.0	1.1	997.4
140°	4.0	3.4	2.2	1.6	1.4	1.1	1.1	0.7	998.1
145°	2.3	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.6
150°	1.9	1.9	1.8	1.6	1.3	1.2	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.3	1.3	1.3	0.3	999.3
160°	1.6	1.6	1.5	1.3	1.3	1.3	1.3	0.3	999.6
165°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.8
170°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.3	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB30DP460B EAN: 4058352520314	LP number 59013_8
------------------------------------	----------------------------------------------------------------	------------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.8	21.5	20.2	21.8	22.1	19.8	21.5	20.2	21.8	22.2
	3H	21.5	23.1	21.9	23.4	23.8	21.2	22.7	21.6	23.1	23.4
	4H	22.4	23.8	22.8	24.2	24.5	21.7	23.1	22.1	23.5	23.9
	6H	23.1	24.5	23.5	24.8	25.2	22.0	23.4	22.5	23.8	24.1
	8H	23.5	24.7	23.9	25.1	25.5	22.2	23.4	22.6	23.8	24.2
	12H	23.8	25.0	24.2	25.4	25.8	22.2	23.4	22.7	23.8	24.2
4H	2H	20.5	21.9	20.9	22.3	22.7	20.5	22.0	20.9	22.3	22.7
	3H	22.4	23.7	22.8	24.1	24.5	22.0	23.3	22.5	23.7	24.1
	4H	23.4	24.5	23.8	24.9	25.4	22.7	23.8	23.1	24.2	24.6
	6H	24.3	25.3	24.8	25.7	26.2	23.1	24.1	23.6	24.6	25.0
	8H	24.7	25.6	25.2	26.1	26.6	23.3	24.2	23.7	24.6	25.1
	12H	25.2	26.0	25.6	26.4	26.9	23.4	24.2	23.9	24.7	25.1
8H	4H	23.7	24.6	24.2	25.1	25.5	23.1	24.0	23.5	24.4	24.9
	6H	24.8	25.6	25.3	26.0	26.5	23.7	24.4	24.2	24.9	25.4
	8H	25.3	26.0	25.8	26.5	27.0	23.9	24.6	24.4	25.1	25.6
	12H	25.9	26.5	26.4	27.0	27.5	24.0	24.6	24.6	25.1	25.7
12H	4H	23.8	24.6	24.2	25.0	25.5	23.2	24.0	23.7	24.4	24.9
	6H	24.9	25.6	25.4	26.0	26.6	23.8	24.5	24.3	25.0	25.5
	8H	25.5	26.1	26.0	26.6	27.1	24.1	24.7	24.6	25.2	25.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		9854.1	9927.6	10016.8	10255.7	10751.2	11391.4	12193.6	
50°		9289.3	9333.8	9404.6	9572.4	9988.1	10602.6	11478.0	
55°		8770.3	8783.2	8823.0	8906.6	9227.5	9778.5	10706.7	
60°		8296.2	8287.5	8264.0	8269.6	8484.8	8952.1	9887.5	
65°		7907.3	7874.3	7761.1	7660.9	7771.9	8136.6	9050.1	
70°		7559.6	7513.2	7272.3	7063.7	7050.3	7291.0	8166.9	
75°		7208.5	7129.8	6810.9	6471.4	6265.0	6355.8	7153.2	
80°		6816.8	6698.6	6393.3	5842.8	5383.4	5203.9	5842.3	
85°		6531.3	6393.9	6075.2	5414.8	4563.5	3891.2	4115.0	


Photometric test report

Family Monsun® 21	Order number: 51FB30DP460B EAN: 4058352520314	LP number 59013_8
------------------------------------	----------------------------------------------------------------	------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

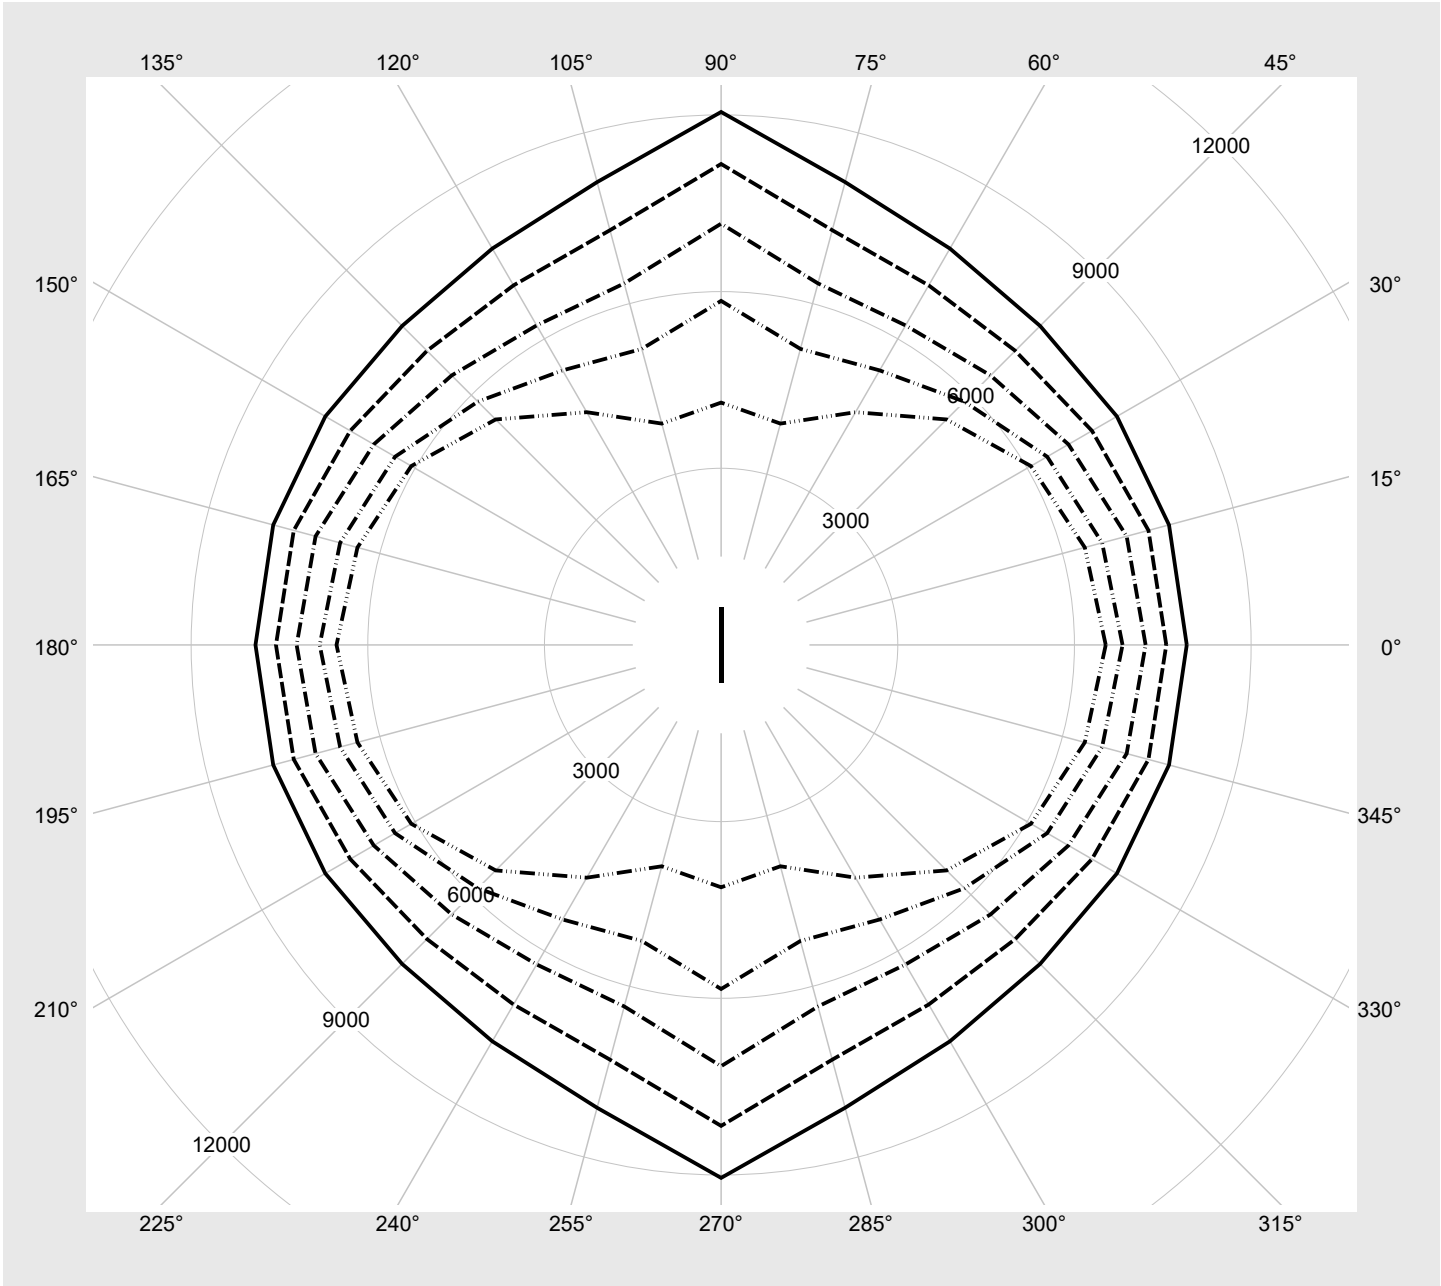

Photometric test report

Family Monsun® 21	Order number: 51FB30DP460B EAN: 4058352520314	LP number 59013_8
------------------------------------	----------------------------------------------------------------	------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5740	39.4
95	240	252	5445	37.2
90	227	250	5168	35.1
85	213	248	4870	33.0
80	200	245	4588	31.0
75	187	243	4304	29.1
70	174	240	4018	27.1
65	161	237	3730	25.1
60	148	234	3439	23.2
55	136	231	3168	21.5
50	123	227	2873	19.6
45	110	223	2575	17.7
40	98	219	2299	16.0
35	85	214	1998	14.1
30	73	208	1718	12.4
25	61	202	1438	10.6
20	49	194	1154	8.8
15	37	183	869	7.2
10	25	169	581	5.6
5	13	145	292	4.0
3	7	122	146	3.2