

Photometric test report

Family
Monsun® 12

Order number: **51FP10MP480H**
EAN: **4058352389737**

LP number
58939_13



Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 8070 lm
Power consumption = 45.4 W
Luminous efficacy = 177.8 lm/W

serial
documentation
08.04.2020


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 340 cd/klm

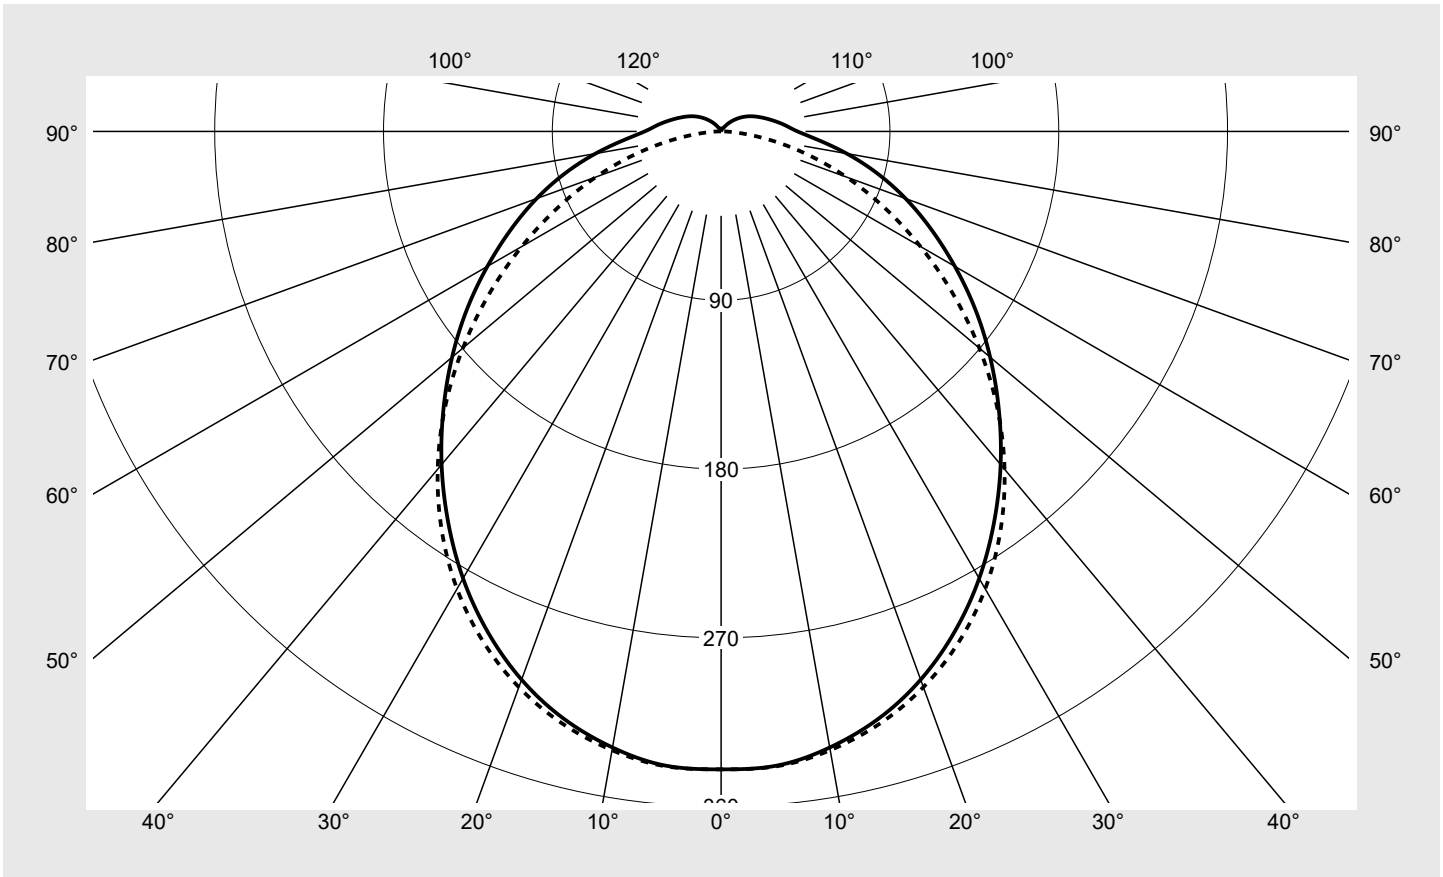

Classifications

DIN 5040 A 4 1
CIE N1=47 N2=77 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.2%
 ϕ_o 5.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FP10MP480H EAN: 4058352389737	LP number 58939_13
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 12	Order number: 51FP10MP480H EAN: 4058352389737	LP number 58939_13
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco								
------------------	----------------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.1	22.8	21.4	23.1	23.4	21.1	22.8	21.4	23.1	23.4
	3H	22.8	24.4	23.2	24.7	25.0	22.4	24.0	22.8	24.3	24.7
	4H	23.6	25.1	24.0	25.4	25.8	23.0	24.4	23.4	24.8	25.1
	6H	24.4	25.7	24.8	26.1	26.5	23.3	24.7	23.7	25.0	25.4
	8H	24.8	26.0	25.2	26.4	26.8	23.5	24.7	23.9	25.1	25.5
	12H	25.1	26.3	25.5	26.6	27.1	23.5	24.7	23.9	25.1	25.5
4H	2H	21.8	23.2	22.2	23.6	23.9	21.8	23.2	22.2	23.6	23.9
	3H	23.7	25.0	24.1	25.3	25.7	23.3	24.6	23.7	25.0	25.4
	4H	24.7	25.8	25.1	26.2	26.6	24.0	25.1	24.4	25.5	25.9
	6H	25.6	26.6	26.0	27.0	27.5	24.4	25.4	24.9	25.9	26.3
	8H	26.0	26.9	26.5	27.4	27.8	24.6	25.5	25.1	26.0	26.4
	12H	26.4	27.2	26.9	27.7	28.2	24.7	25.5	25.2	26.0	26.5
8H	4H	25.0	25.9	25.5	26.4	26.8	24.4	25.3	24.9	25.7	26.2
	6H	26.1	26.8	26.6	27.3	27.8	25.0	25.8	25.5	26.2	26.7
	8H	26.6	27.3	27.1	27.8	28.3	25.2	25.9	25.7	26.4	26.9
	12H	27.2	27.8	27.7	28.2	28.8	25.4	26.0	25.9	26.5	27.0
12H	4H	25.0	25.9	25.5	26.3	26.8	24.5	25.3	25.0	25.7	26.2
	6H	26.2	26.8	26.7	27.3	27.8	25.2	25.8	25.7	26.3	26.8
	8H	26.8	27.3	27.3	27.8	28.4	25.4	26.0	25.9	26.5	27.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13915.0	14001.3	14103.7	14398.6	15020.1	15851.9	16951.6	
50°		13197.5	13246.4	13345.4	13549.0	14061.4	14851.3	16056.3	
55°		12514.4	12529.0	12605.7	12705.0	13101.1	13791.4	15061.2	
60°		11839.3	11829.3	11849.9	11887.5	12148.6	12718.7	13999.5	
65°		11245.8	11218.7	11123.8	11053.2	11208.4	11637.4	12887.5	
70°		10736.2	10675.5	10398.5	10202.1	10220.2	10498.8	11692.9	
75°		10204.9	10108.5	9720.7	9326.4	9095.1	9188.9	10272.7	
80°		9641.7	9481.6	9093.1	8392.1	7807.6	7547.8	8400.7	
85°		9230.8	9035.4	8612.9	7734.0	6574.1	5633.0	5866.8	


Photometric test report

Family Monsun® 12	Order number: 51FP10MP480H EAN: 4058352389737	LP number 58939_13
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

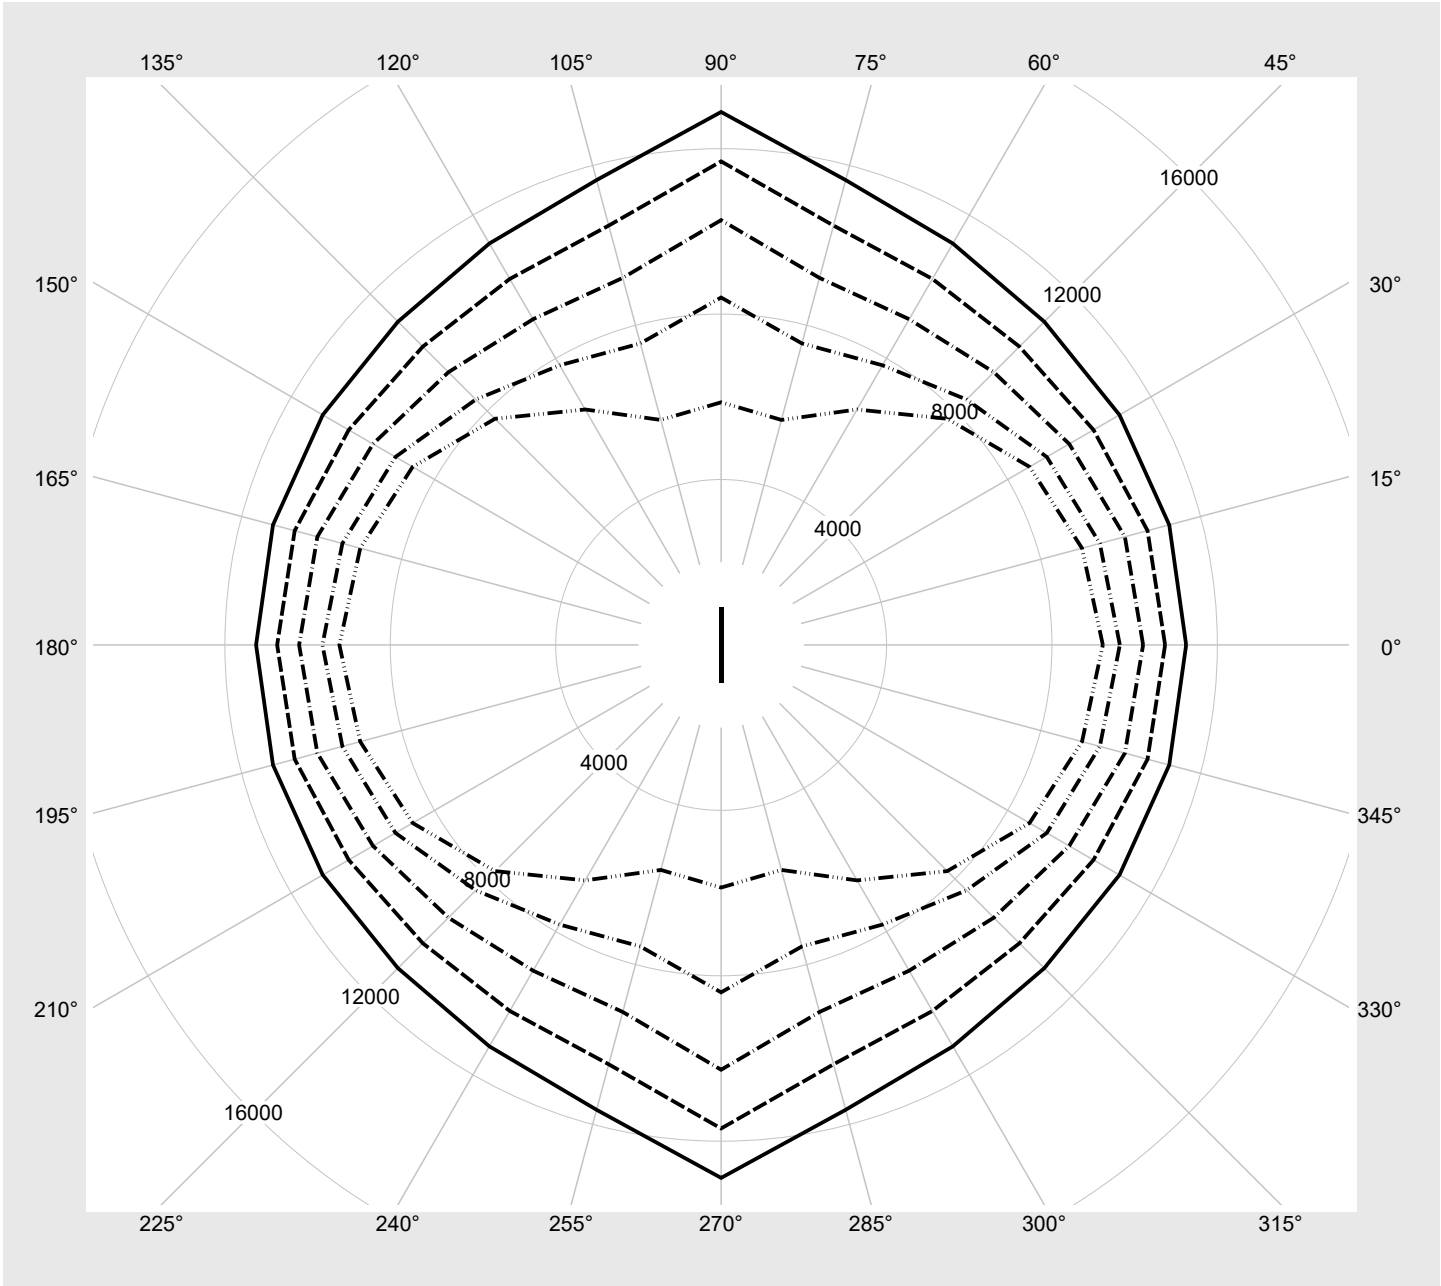

Photometric test report

Family
Monsun® 12

Order number: 51FP10MP480H
EAN: 4058352389737

LP number
58939_13

Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	8070	45.4
2	A	C	F	7500	41.9
3	A	D	E	6840	38.0
4	A	D	F	6250	34.6
5	B	C	E	5650	31.2
6	B	C	F	5050	27.8
7	B	D	E	4430	24.5
8	B	D	F	4120	22.9