


Photometric test report

Family Spot 11	Order number: 51SD34EAD5A EAN: 4058352767788	LP number 59368_10
Version	reflector, cover panel, PC, clear, wide distribution	serial documentation 23.12.2022
Lamps	LED 4000 K CRI ≥ 90	
Controlgear	ECG-DALI	
Setting	factory setting: DIP-Step=10	
Rated values	Net luminous flux = 5670 lm Power consumption = 38.4 W Luminous efficacy = 147.7 lm/W	



Luminous intensity in cd/klm C180-0 **Imax: 1788 cd/klm**

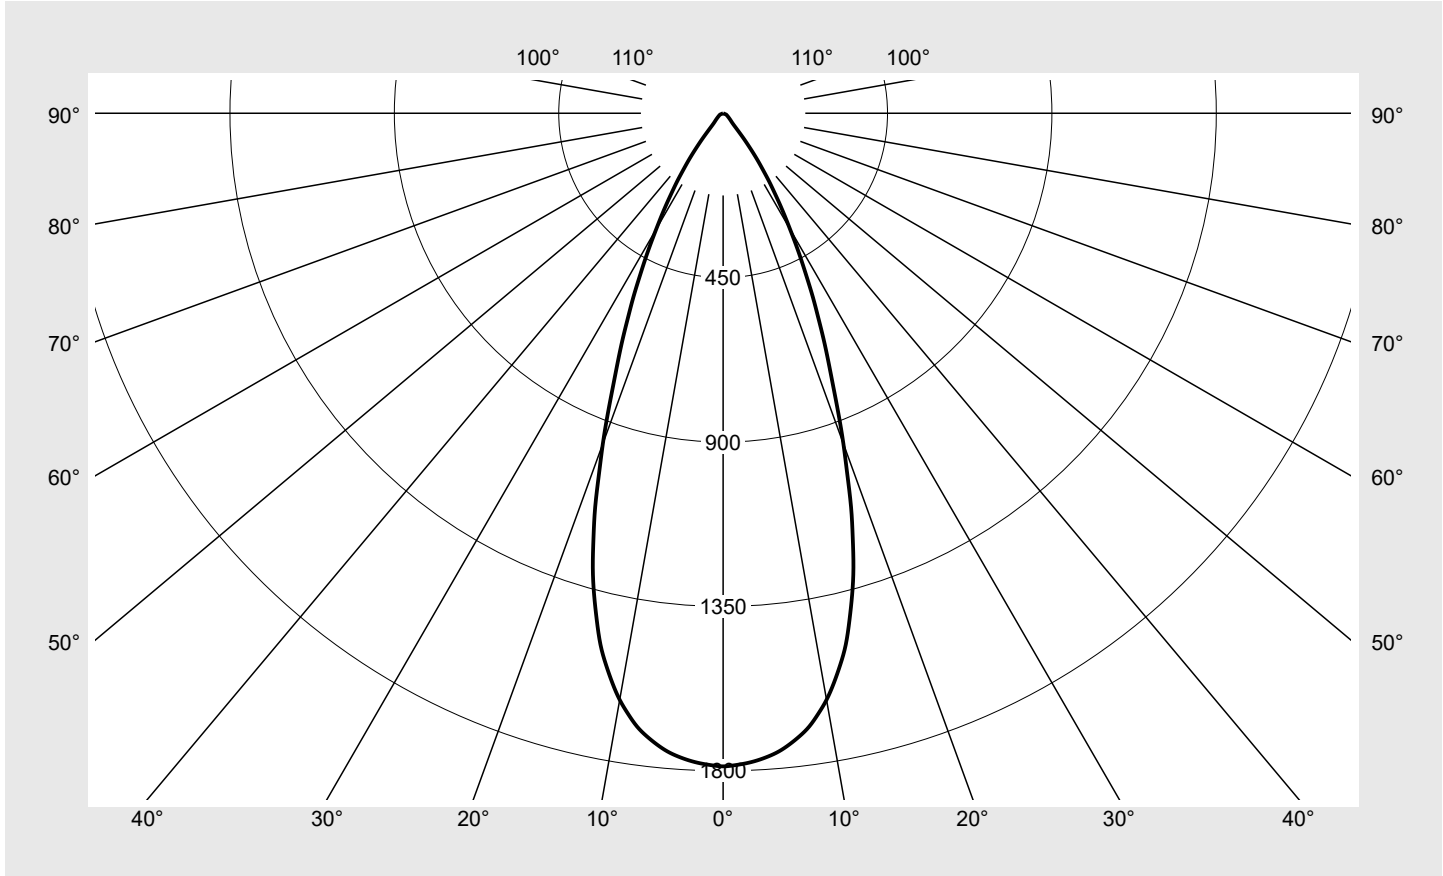

Classifications	
DIN 5040	A 7 0
CIE	N1=95 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 11	Order number: 51SD34EAD5A EAN: 4058352767788	LP number 59368_10
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
0°	1787.8	0.4	0.4
1°	1785.0	3.4	3.8
2°	1780.6	6.8	10.7
3°	1774.1	10.2	20.8
4°	1765.1	13.5	34.3
5°	1753.5	16.8	51.1
6°	1737.2	19.9	71.0
7°	1718.0	23.0	94.0
8°	1695.0	25.9	119.8
9°	1664.4	28.6	148.4
10°	1630.4	31.0	179.4
11°	1588.8	33.2	212.7
12°	1543.0	35.2	247.9
13°	1492.7	36.8	284.7
14°	1429.8	37.9	322.6
15°	1364.5	38.7	361.3
16°	1294.1	39.1	400.5
17°	1213.5	38.9	439.4
18°	1133.2	38.4	477.8
19°	1043.5	37.3	515.0
20°	962.6	36.1	551.1
21°	880.9	34.6	585.7
22°	803.1	33.0	618.7
23°	736.5	31.6	650.3
24°	675.3	30.1	680.4
25°	614.8	28.5	708.9
26°	561.0	27.0	735.9
27°	506.2	25.2	761.1
28°	457.2	23.5	784.6
29°	410.6	21.8	806.4
30°	366.1	20.1	826.5
31°	327.4	18.5	845.0
32°	290.6	16.9	861.9
33°	255.7	15.3	877.2
34°	225.3	13.8	891.0
35°	193.5	12.2	903.2
36°	166.5	10.7	913.9
37°	139.9	9.2	923.1
38°	114.0	7.7	930.8
39°	91.9	6.3	937.2
40°	71.2	5.0	942.2
41°	55.8	4.0	946.2
42°	45.5	3.3	949.5
43°	39.2	2.9	952.5
44°	34.9	2.7	955.1
45°	32.1	2.5	957.6
46°	29.6	2.3	960.0

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
47°	27.8	2.2	962.2
48°	25.7	2.1	964.3
49°	24.0	2.0	966.3
50°	22.5	1.9	968.2
51°	21.0	1.8	969.9
52°	19.7	1.7	971.7
53°	18.6	1.6	973.3
54°	17.4	1.5	974.8
55°	16.5	1.5	976.3
56°	15.5	1.4	977.7
57°	14.7	1.4	979.1
58°	14.0	1.3	980.4
59°	13.3	1.2	981.6
60°	12.7	1.2	982.8
61°	12.0	1.2	984.0
62°	11.5	1.1	985.1
63°	10.9	1.1	986.2
64°	10.4	1.0	987.2
65°	9.9	1.0	988.2
66°	9.4	0.9	989.1
67°	9.0	0.9	990.0
68°	8.5	0.9	990.9
69°	8.1	0.8	991.7
70°	7.7	0.8	992.5
71°	7.3	0.8	993.3
72°	6.8	0.7	994.0
73°	6.5	0.7	994.7
74°	6.1	0.6	995.3
75°	5.7	0.6	995.9
76°	5.4	0.6	996.5
77°	5.0	0.5	997.0
78°	4.7	0.5	997.5
79°	4.4	0.5	998.0
80°	4.0	0.4	998.4
81°	3.5	0.4	998.8
82°	3.1	0.3	999.1
83°	2.5	0.3	999.4
84°	2.0	0.2	999.6
85°	1.5	0.2	999.8
86°	1.0	0.1	999.9
87°	0.6	0.1	1000.0
88°	0.2	0.0	1000.0
89°	0.1	0.0	1000.0
90°	0.1	0.0	1000.0

Photometric test report

Family Spot 11	Order number: 51SD34EAD5A EAN: 4058352767788	LP number 59368_10
-------------------	---	-----------------------

UGR-Table	Standard room	sitEco
-----------	---------------	--------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.9	23.0	22.2	23.3	23.6	21.9	23.0	22.2	23.3	23.6
	3H	22.1	23.1	22.5	23.4	23.8	22.1	23.1	22.5	23.4	23.8
	4H	22.3	23.1	22.7	23.5	23.9	22.3	23.1	22.7	23.5	23.9
	6H	22.4	23.2	22.9	23.6	24.0	22.4	23.2	22.9	23.6	24.0
	8H	22.6	23.2	23.1	23.6	24.0	22.6	23.2	23.1	23.6	24.0
	12H	22.6	23.2	23.1	23.6	24.0	22.6	23.2	23.1	23.6	24.0
4H	2H	21.8	22.7	22.2	23.1	23.4	21.8	22.7	22.2	23.1	23.4
	3H	22.2	22.9	22.6	23.3	23.7	22.2	22.9	22.6	23.3	23.7
	4H	22.4	23.1	22.9	23.5	23.9	22.4	23.1	22.9	23.5	23.9
	6H	22.7	23.2	23.2	23.7	24.2	22.7	23.2	23.2	23.7	24.2
	8H	22.8	23.3	23.3	23.8	24.2	22.8	23.3	23.3	23.8	24.2
	12H	22.9	23.3	23.4	23.8	24.3	22.9	23.3	23.4	23.8	24.3
8H	4H	22.5	23.0	23.0	23.4	23.9	22.5	23.0	23.0	23.4	23.9
	6H	22.9	23.2	23.4	23.7	24.2	22.9	23.2	23.4	23.7	24.2
	8H	23.0	23.4	23.5	23.8	24.4	23.0	23.4	23.5	23.8	24.4
	12H	23.1	23.4	23.7	23.9	24.4	23.1	23.4	23.7	23.9	24.4
12H	4H	22.5	22.9	23.0	23.4	23.9	22.5	22.9	23.0	23.4	23.9
	6H	22.9	23.2	23.4	23.7	24.2	22.9	23.2	23.4	23.7	24.2
	8H	23.1	23.3	23.6	23.8	24.4	23.1	23.3	23.6	23.8	24.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	52561.1
50°	40456.4
55°	33235.7
60°	29298.1
65°	27086.3
70°	25950.9
75°	25461.8
80°	26499.2
85°	19377.4


Photometric test report

Family Spot 11	Order number: 51SD34EAD5A EAN: 4058352767788	LP number 59368_10
---------------------------------	---	-------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

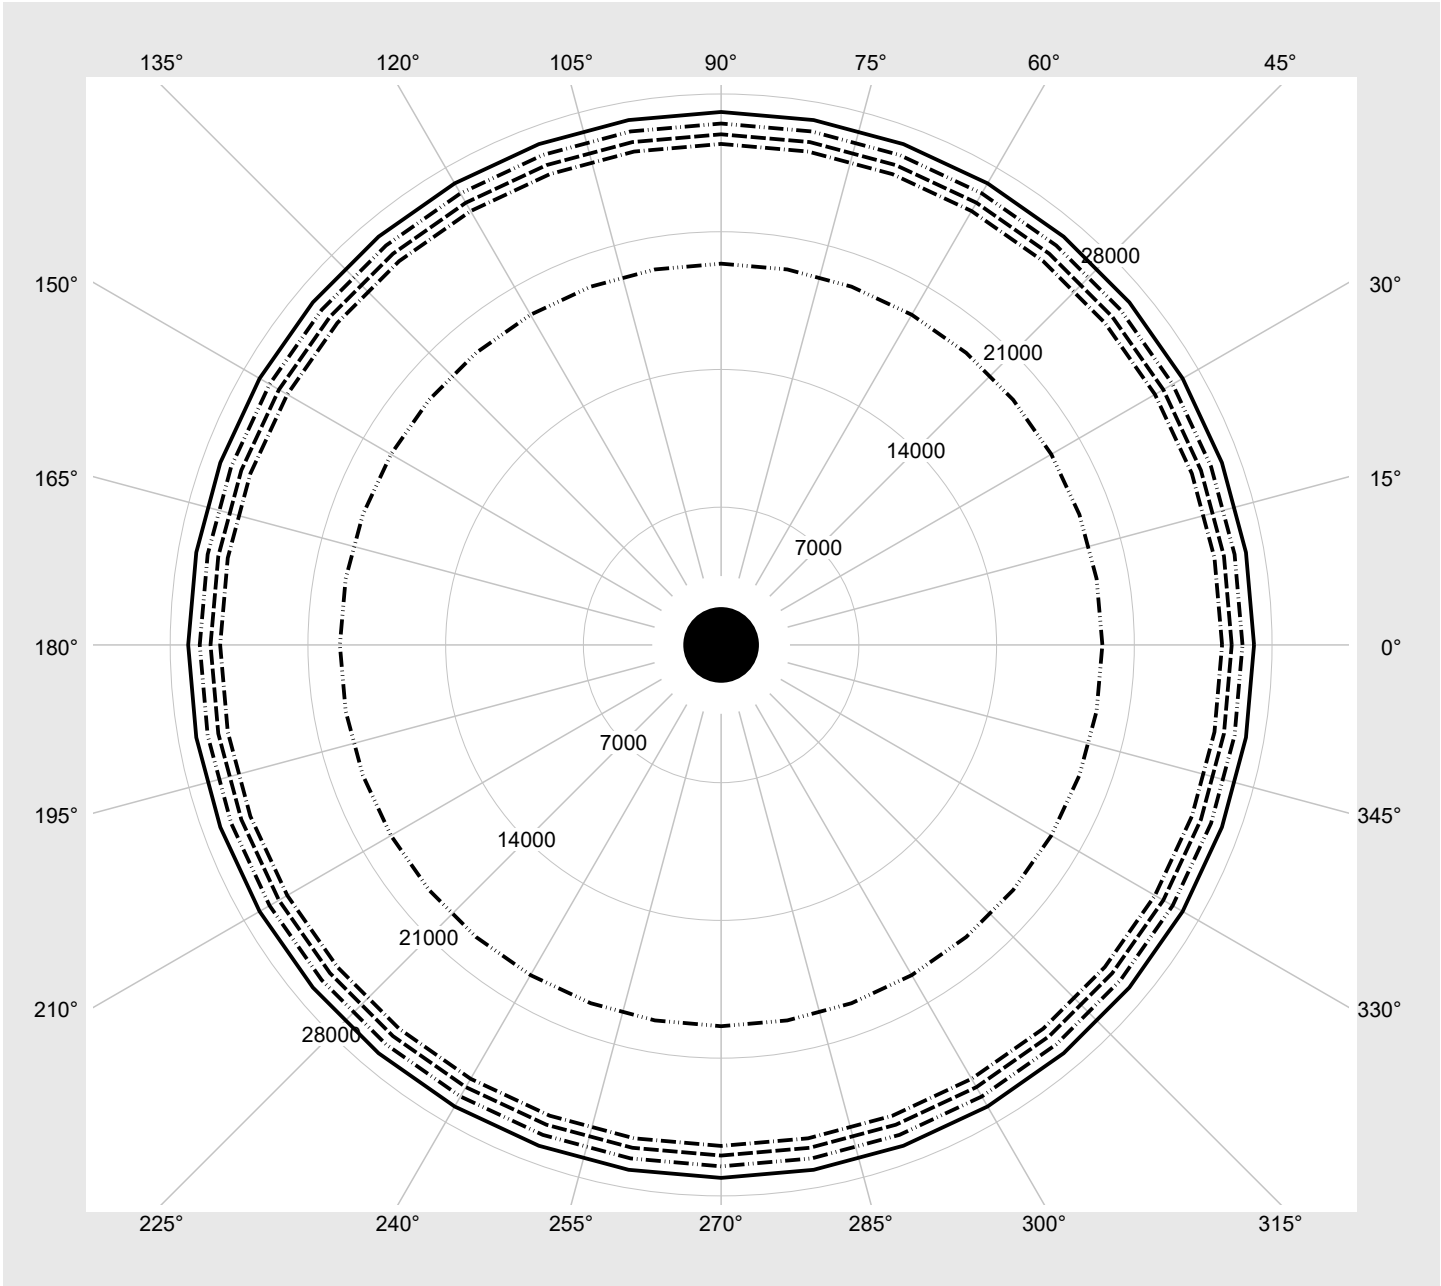

Photometric test report

Family Spot 11	Order number: 51SD34EAD5A EAN: 4058352767788	LP number 59368_10
--------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	7420	51.1
14	ON	ON	ON	OFF	7030	48.4
13	ON	ON	OFF	ON	6700	45.8
12	ON	ON	OFF	OFF	6410	43.5
11	ON	OFF	ON	ON	6010	40.7
10	ON	OFF	ON	OFF	5670	38.4
9	ON	OFF	OFF	ON	5290	35.8
8	ON	OFF	OFF	OFF	4990	33.6
7	OFF	ON	ON	ON	4700	31.4
6	OFF	ON	ON	OFF	4390	29.1
5	OFF	ON	OFF	ON	4040	26.6
4	OFF	ON	OFF	OFF	3720	24.3
3	OFF	OFF	ON	ON	3310	21.6
2	OFF	OFF	ON	OFF	2970	19.3
1	OFF	OFF	OFF	ON	2590	16.8
0	OFF	OFF	OFF	OFF	2240	14.4