




Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (STW1.0a G) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG DIM Rated values Net luminous flux = 13390 lm Power consumption = 87.3 W Luminous efficacy = 153.4 lm/W	serial documentation 23.08.2022
		

Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 535 cd/klm**

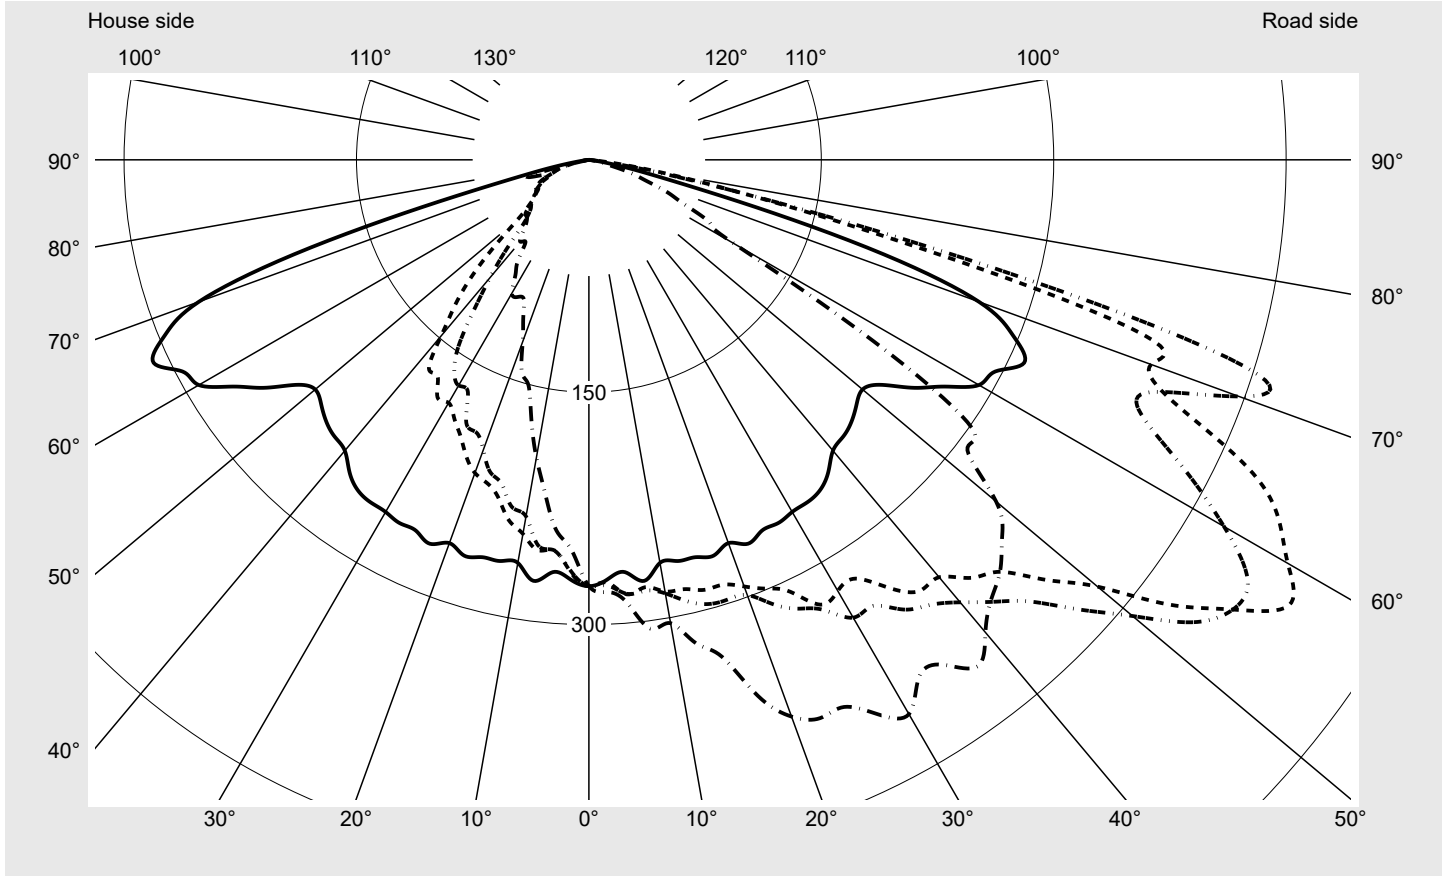


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	486.3
Imax 80°	49.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

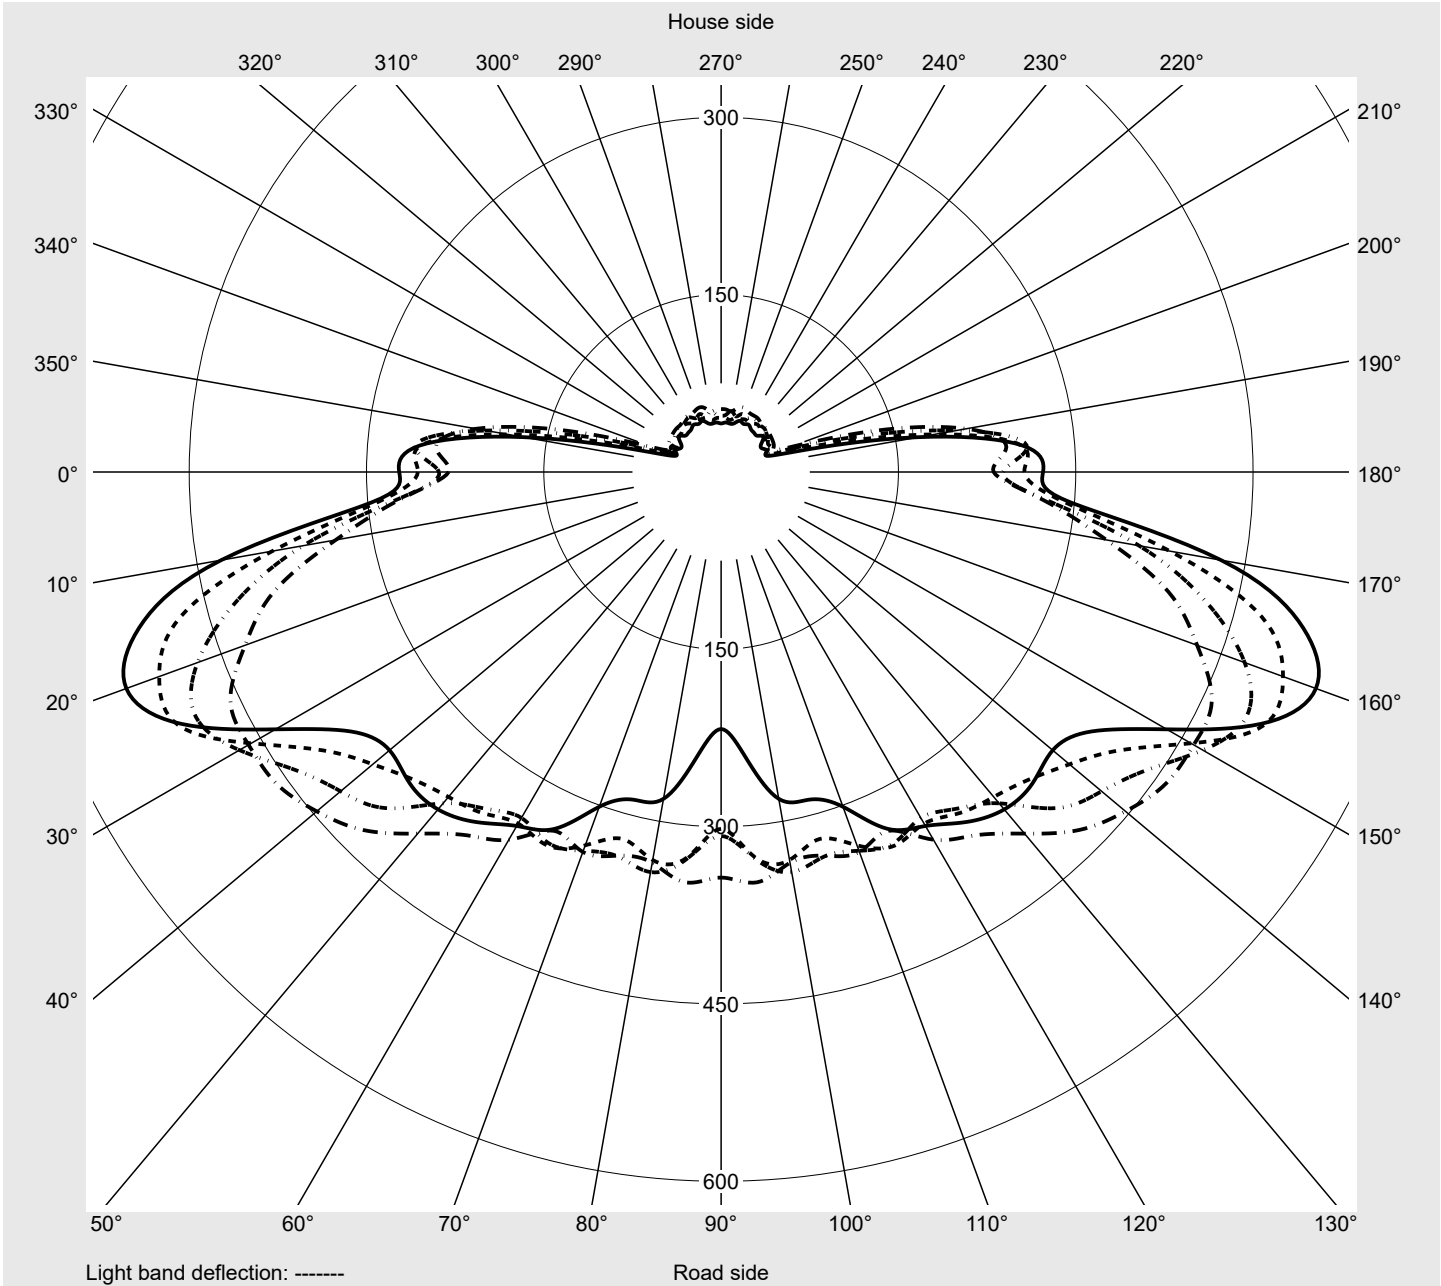

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	271.1	272.6	274.2	272.4	273.1	275.0	271.7	272.5	277.2	276.0	276.0	276.0	273.8
5,0°	267.1	272.9	275.2	280.1	281.5	281.2	280.8	282.7	283.1	284.1	282.6	285.7	289.7
7,5°	274.1	279.0	277.5	278.4	278.2	280.5	282.2	280.1	280.7	279.4	280.1	282.2	287.0
10,0°	264.1	267.7	274.1	281.5	282.9	284.1	284.6	289.0	288.4	289.8	289.4	296.1	298.5
12,5°	265.2	273.1	281.9	286.0	283.8	291.7	297.8	297.4	299.9	302.2	305.4	304.8	305.6
15,0°	265.5	268.6	273.1	278.4	287.3	296.8	296.7	300.7	302.2	302.6	306.1	317.4	327.7
17,5°	267.8	273.0	278.7	286.4	287.5	297.6	312.8	307.7	310.5	319.9	331.7	332.0	337.4
20,0°	263.2	276.0	283.2	285.6	293.0	298.9	314.1	316.9	322.0	337.8	350.9	349.4	357.5
22,5°	268.2	277.3	286.1	293.7	299.5	310.4	324.4	326.9	342.4	343.6	356.1	369.0	375.1
25,0°	264.1	279.2	290.5	304.6	307.6	319.6	332.9	339.3	354.0	370.6	376.6	388.5	394.7
27,5°	264.4	278.9	292.5	301.1	323.7	327.4	350.6	352.7	365.4	382.4	390.1	396.0	398.1
30,0°	262.4	282.1	299.4	304.0	321.3	341.2	351.9	364.5	376.7	390.8	402.8	403.1	399.6
32,5°	262.1	278.2	296.7	315.0	320.5	341.4	361.3	372.4	390.8	396.6	408.5	414.4	410.7
35,0°	260.2	274.8	293.4	320.6	337.1	354.3	370.4	374.9	395.6	416.3	417.7	425.9	434.6
37,5°	253.9	269.5	301.7	327.7	350.7	362.0	373.6	396.8	412.7	434.7	432.1	435.0	433.6
40,0°	245.1	278.1	306.0	330.0	351.7	372.8	391.4	402.6	422.5	443.3	435.7	438.1	439.9
42,5°	242.6	268.1	310.3	337.6	365.9	386.9	401.8	431.6	446.3	442.4	453.9	429.3	424.6
45,0°	239.5	273.8	302.3	342.4	376.0	403.2	431.8	441.1	452.0	463.2	443.3	420.5	405.7
47,5°	234.2	273.4	316.7	354.5	401.5	429.6	443.6	448.8	453.7	445.8	421.4	404.1	379.3
50,0°	230.6	273.9	331.1	391.8	428.6	458.0	461.6	459.4	446.6	428.3	399.3	375.2	359.2
52,5°	238.6	277.2	359.1	425.0	471.4	490.3	470.6	439.6	420.2	402.0	365.9	347.7	337.9
55,0°	256.6	291.5	385.6	473.5	505.9	506.7	459.0	410.7	384.7	368.1	358.8	352.1	343.4
57,5°	272.4	297.3	429.5	509.8	535.5	504.1	435.4	382.6	366.2	372.5	372.6	361.5	345.8
60,0°	290.7	312.9	440.7	516.1	520.9	473.3	391.3	379.2	399.9	420.5	391.2	362.4	336.3
62,5°	295.8	319.6	438.3	511.2	501.8	433.9	373.9	424.8	468.3	466.9	396.4	312.7	244.7
65,0°	310.0	306.1	414.0	482.8	468.6	395.4	406.6	503.6	507.9	477.9	351.8	231.9	136.1
67,5°	296.3	284.8	343.3	418.8	408.3	391.9	456.6	515.0	519.3	406.7	244.9	142.9	85.5
70,0°	267.9	221.9	267.0	347.6	386.2	446.6	482.2	486.3	474.1	299.8	141.0	105.2	59.3
72,5°	188.3	130.0	180.7	283.4	375.3	444.0	418.1	427.9	352.8	173.7	109.3	73.5	42.6
75,0°	79.5	49.5	103.3	171.0	226.3	273.0	234.3	258.1	188.4	90.8	79.5	53.3	28.4
77,5°	32.8	26.1	45.5	68.8	109.2	112.3	72.0	72.0	64.4	51.6	54.2	38.7	20.2
80,0°	12.7	11.2	13.8	29.0	49.2	38.8	18.1	12.1	17.2	27.4	33.2	21.4	13.7
82,5°	3.2	2.9	2.9	5.3	16.4	9.5	4.8	5.8	4.2	4.2	8.1	8.7	8.6
85,0°	1.0	0.7	1.0	1.2	1.0	1.3	1.2	1.3	1.3	1.2	1.1	1.3	1.4
87,5°	0.2	0.3	0.3	0.2	0.3	0.2	0.2	0.1	0.1	0.2	0.3	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	275.4	276.4	275.8	278.7	278.6	279.2	271.9	270.2	267.9	266.6	265.7	265.4	263.3
5,0°	286.6	286.7	285.9	286.3	284.1	287.4	264.7	262.8	256.2	253.3	253.1	251.8	249.4
7,5°	296.6	297.2	303.1	302.6	302.8	305.2	270.5	262.1	259.5	254.0	251.0	248.1	242.3
10,0°	301.8	296.6	299.1	304.9	306.9	303.6	259.4	258.2	251.7	245.1	233.7	230.0	225.1
12,5°	309.7	314.4	316.9	312.5	316.6	319.6	255.9	247.6	242.0	238.3	229.5	217.0	207.4
15,0°	330.0	333.2	335.6	336.4	331.8	332.1	257.5	245.9	237.1	225.7	216.8	209.9	200.7
17,5°	340.4	350.7	346.9	351.7	356.5	362.7	255.8	243.9	231.9	218.7	211.5	199.8	188.0
20,0°	362.8	363.2	373.1	382.4	380.6	382.4	252.3	241.2	228.1	215.1	199.2	189.6	172.4
22,5°	387.9	383.3	388.4	391.7	392.5	390.0	253.3	235.4	220.1	206.9	190.3	176.2	163.6
25,0°	395.3	398.5	402.1	400.7	402.0	389.6	250.3	227.6	210.8	196.3	187.2	166.5	152.4
27,5°	401.7	407.5	403.6	409.3	400.9	403.3	260.7	230.3	210.7	188.2	169.1	157.2	146.2
30,0°	413.5	413.1	416.0	405.9	412.5	413.1	252.2	228.6	208.9	181.1	168.2	150.9	126.5
32,5°	416.5	415.7	415.4	407.1	400.4	396.3	250.2	222.7	203.8	181.8	161.7	133.9	105.2
35,0°	424.4	420.6	411.8	403.2	413.5	397.8	239.8	214.2	199.1	170.3	146.6	110.2	83.9
37,5°	425.9	417.6	417.5	409.3	406.8	412.1	226.9	213.4	196.8	169.6	121.4	85.3	67.5
40,0°	424.1	425.5	404.9	403.6	392.5	398.2	225.0	212.7	194.7	148.3	99.2	71.0	64.3
42,5°	423.2	393.4	395.9	380.3	376.0	384.5	217.5	213.5	183.3	128.6	79.8	58.6	62.0
45,0°	389.6	380.7	368.6	371.4	374.3	375.4	224.9	214.4	166.7	108.0	62.0	58.1	54.8
47,5°	370.2	345.8	351.5	356.1	365.4	361.7	224.3	217.2	151.3	82.7	53.5	53.3	57.7
50,0°	334.9	342.1	336.0	335.7	348.4	343.1	242.2	210.6	134.8	60.0	49.0	50.8	51.6
52,5°	346.2	341.0	336.8	343.7	328.2	308.0	259.4	202.0	112.3	49.3	46.8	46.3	48.4
55,0°	348.5	336.1	321.4	333.3	327.1	301.8	255.3	183.3	89.9	43.5	43.5	43.4	45.5
57,5°	333.1	301.4	287.0	280.8	243.0	217.5	256.1	169.8	70.2	40.4	42.6	39.9	41.4
60,0°	279.1	240.3	177.8	140.7	115.6	108.0	237.5	150.4	54.0	37.7	41.5	39.6	41.3
62,5°	178.1	124.1	98.0	100.8	85.8	88.1	239.1	140.0	43.7	36.8	36.2	37.1	37.9
65,0°	99.1	83.2	78.4	82.9	69.1	68.0	241.7	135.3	46.2	32.9	35.4	35.4	34.2
67,5°	67.6	65.4	58.0	59.1	52.8	55.0	240.2	129.6	40.5	27.7	30.8	32.7	30.2
70,0°	54.9	49.1	44.3	41.8	38.6	38.8	219.4	108.6	29.5	25.1	24.9	26.1	25.9
72,5°	37.5	35.8	30.6	29.5	27.8	29.1	182.7	84.2	24.7	21.6	21.1	20.7	20.3
75,0°	27.1	24.4	19.7	18.6	15.6	14.7	95.9	46.9	22.2	15.0	16.2	15.3	14.5
77,5°	16.0	13.2	12.0	10.3	11.8	9.8	39.9	12.4	10.7	9.4	9.8	10.7	10.3
80,0°	9.9	6.2	5.3	5.1	4.8	4.8	13.7	6.5	4.8	4.8	4.6	5.9	6.2
82,5°	3.9	2.2	1.7	1.8	1.9	1.6	2.3	2.3	2.4	2.4	2.2	2.5	3.4
85,0°	0.8	0.3	0.5	0.4	0.5	0.7	1.0	0.7	0.8	0.7	0.7	0.8	0.6
87,5°	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	0.4	0.4
2,5°	260.8	259.8	256.9	253.8	251.0	252.2	251.9	249.9	250.5	250.2	252.4	3.2	3.6
5,0°	248.3	248.0	247.6	244.7	243.8	240.8	239.7	238.1	240.3	238.3	240.2	6.3	10.0
7,5°	237.6	230.9	229.2	228.6	224.8	222.0	219.4	218.6	215.7	216.7	216.9	9.4	19.3
10,0°	221.3	214.6	208.2	202.9	198.7	198.8	199.0	198.0	198.2	198.1	195.2	12.2	31.5
12,5°	203.7	196.8	192.2	183.7	183.6	182.0	181.0	176.7	174.1	172.2	171.5	15.0	46.5
15,0°	186.5	178.0	176.2	169.6	166.7	160.1	155.8	154.1	151.7	150.9	150.6	17.7	64.2
17,5°	176.1	167.1	157.8	153.5	148.4	147.6	144.8	144.9	145.1	146.7	143.8	20.7	84.8
20,0°	164.3	155.9	149.9	146.2	140.9	137.2	131.6	130.4	128.3	126.9	124.9	23.6	108.5
22,5°	154.2	146.7	140.2	130.7	122.7	116.4	112.1	109.0	111.6	108.2	110.7	26.4	134.9
25,0°	142.1	130.1	120.6	106.7	103.3	95.5	98.8	96.4	97.5	97.4	99.3	29.1	164.0
27,5°	123.7	109.6	92.1	90.5	86.8	87.4	88.0	94.3	96.2	99.4	99.8	31.7	195.7
30,0°	104.3	88.4	83.4	81.7	84.9	91.2	91.8	95.1	93.2	95.8	99.4	34.4	230.1
32,5°	81.6	73.6	73.0	73.4	77.3	81.3	81.6	84.1	86.0	82.6	88.3	36.5	266.6
35,0°	69.6	66.2	65.4	69.0	64.3	66.1	67.8	70.2	73.5	73.0	80.2	38.6	305.2
37,5°	70.3	69.8	68.3	63.8	63.8	59.8	62.3	66.0	64.0	64.6	67.3	41.0	346.2
40,0°	65.5	66.3	67.3	63.3	62.7	67.0	69.6	69.2	66.5	65.0	68.9	43.2	389.4
42,5°	64.0	62.1	68.3	59.5	72.1	75.8	71.4	68.4	64.4	63.6	62.6	45.0	434.4
45,0°	58.5	58.8	65.2	59.8	62.5	64.7	64.0	60.4	60.0	57.6	57.0	46.3	480.6
47,5°	53.8	57.1	57.5	58.4	56.9	59.5	56.5	57.2	57.7	57.2	54.4	47.2	527.9
50,0°	52.4	52.7	52.9	54.9	55.1	55.6	57.4	56.4	52.2	52.9	53.2	48.3	576.2
52,5°	50.2	51.8	51.5	52.5	53.4	50.3	52.2	48.7	52.1	48.7	47.6	49.5	625.7
55,0°	47.0	47.2	50.2	49.9	48.0	48.9	47.8	47.7	44.7	45.8	45.7	50.6	676.3
57,5°	46.6	43.4	43.3	44.0	46.3	44.9	46.0	42.7	41.6	42.0	41.1	50.5	726.8
60,0°	39.7	40.8	39.5	40.4	40.2	41.0	40.9	42.6	41.2	41.2	39.3	48.0	774.8
62,5°	36.9	38.6	35.2	36.9	36.9	36.9	37.6	37.2	37.3	37.5	36.1	45.8	820.6
65,0°	33.7	36.6	36.0	30.8	34.2	31.7	33.6	34.0	34.8	34.2	33.8	43.9	864.4
67,5°	30.7	30.9	31.1	30.5	30.9	30.4	30.0	32.6	33.0	32.5	32.0	40.1	904.6
70,0°	24.9	27.9	27.6	27.1	28.7	24.9	27.3	28.1	30.3	29.7	29.0	35.7	940.2
72,5°	20.6	22.8	23.9	24.1	24.1	24.0	23.7	24.0	28.1	31.5	34.3	29.2	969.4
75,0°	16.2	18.4	21.1	21.3	20.4	20.7	19.2	19.2	26.6	34.8	38.2	17.7	987.1
77,5°	10.5	11.5	15.4	16.1	16.5	15.0	14.2	12.3	12.7	7.0	5.2	8.0	995.1
80,0°	7.0	7.3	9.5	11.3	13.1	11.1	7.6	9.0	5.4	1.0	1.0	3.5	998.6
82,5°	3.1	4.6	5.5	6.4	6.3	4.6	4.5	3.8	1.9	0.6	0.3	1.2	999.7
85,0°	0.9	0.9	0.9	1.0	0.9	0.8	0.7	0.7	0.2	0.1	0.0	0.2	1000.0
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
---	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	13390	87.3	90.3	88.8
95	94	12725	82.1	84.8	83.4
90	88	12042	76.8	79.3	78.0
85	82	11343	71.5	73.9	72.7
80	77	10743	67.0	69.3	68.2
75	71	10004	61.9	63.9	62.9
70	66	9382	57.6	59.4	58.5
65	61	8750	53.4	55.0	54.2
60	55	7975	48.2	49.7	49.0
55	50	7317	44.0	45.3	44.6
50	45	6644	39.8	41.0	40.4
45	40	5959	35.7	36.7	36.2
40	36	5402	32.2	33.2	32.7
35	31	4697	28.1	28.9	28.5
30	26	3980	24.0	24.7	24.4
25	22	3398	20.7	21.3	21.0
20	17	2662	16.6	17.0	16.8
15	13	2065	13.3	13.7	13.5
10	8	1307	9.0	9.3	9.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	13810	88.4	91.4	89.9
95	94	13103	83.0	85.8	84.4
90	88	12382	77.7	80.2	79.0
85	83	11769	73.2	75.7	74.4
80	77	11016	67.9	70.2	69.1
75	72	10375	63.6	65.6	64.6
70	67	9730	59.2	61.1	60.2
65	61	8940	54.1	55.8	55.0
60	56	8272	49.8	51.3	50.6
55	51	7595	45.5	46.9	46.2
50	46	6903	41.2	42.5	41.8
45	41	6202	37.0	38.1	37.6
40	36	5490	32.7	33.7	33.2
35	31	4769	28.5	29.3	28.9
30	27	4184	25.2	26.0	25.6
25	22	3444	21.0	21.6	21.3
20	17	2696	16.9	17.3	17.1
15	13	2090	13.5	13.9	13.7
10	8	1322	9.1	9.4	9.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
---	--	-------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	13620	87.8	90.8	89.3
95	94	12932	82.5	85.3	83.9
90	88	12229	77.2	79.7	78.4
85	83	11631	72.7	75.2	74.0
80	77	10894	67.5	69.8	68.6
75	72	10265	63.2	65.2	64.2
70	66	9502	57.9	59.8	58.8
65	61	8857	53.7	55.4	54.6
60	56	8199	49.4	51.0	50.2
55	51	7532	45.1	46.6	45.8
50	46	6849	40.9	42.2	41.6
45	41	6157	36.7	37.8	37.2
40	36	5453	32.5	33.5	33.0
35	31	4739	28.3	29.1	28.7
31	27	4159	25.0	25.8	25.4
25	22	3425	20.8	21.5	21.2
20	17	2682	16.7	17.2	17.0
15	13	2080	13.4	13.8	13.6
10	8	1316	9.1	9.3	9.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6E43A08JB EAN: 4058352730607	LP number 59079_73
---	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	13390.0	87.3
5.0	13810.0	88.4
15.0	13620.0	87.8