


Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST0.8a G) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 19390 lm Power consumption = 115.8 W Luminous efficacy = 167.4 lm/W	serial documentation 03.04.2023





Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 536 cd/klm**

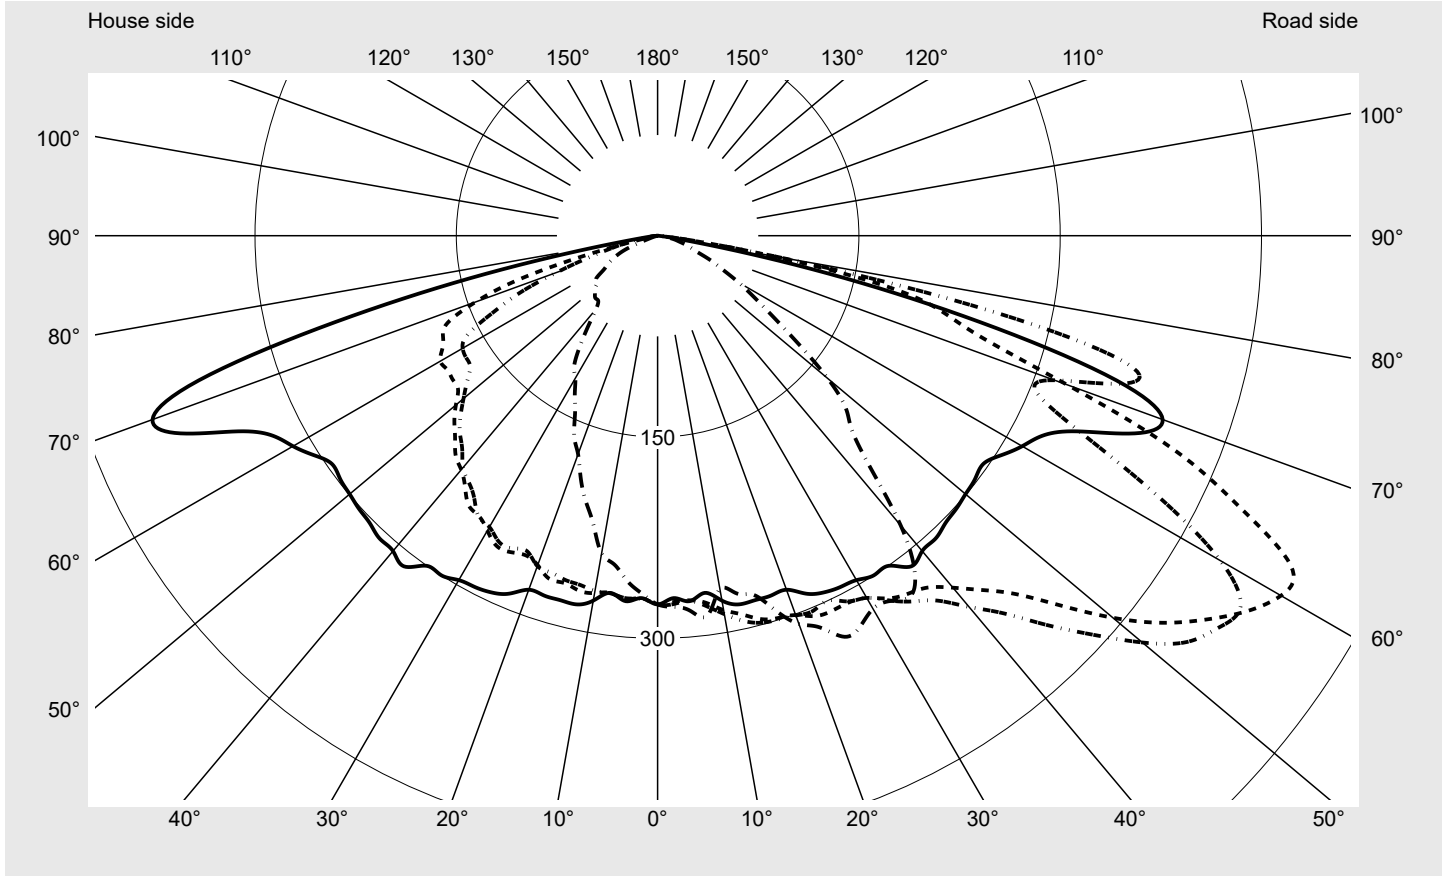

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	493.9
Imax 80°	97.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
----------------------------------	--	-------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

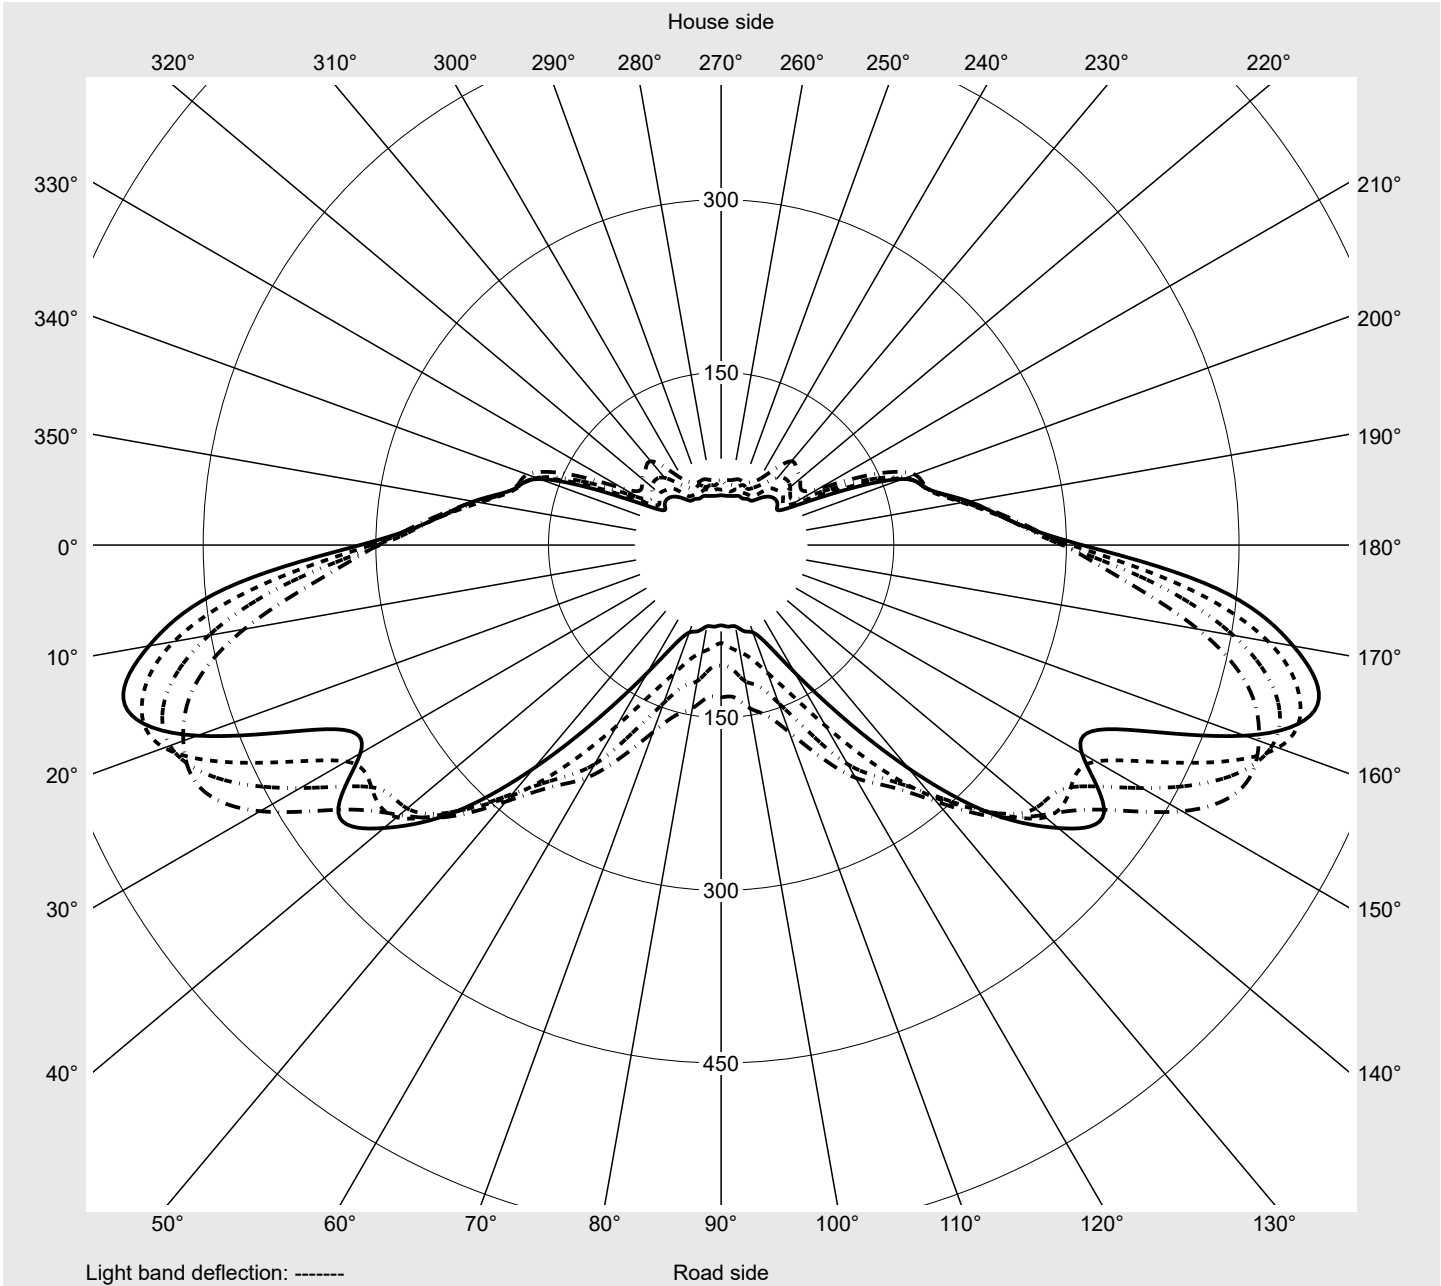

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	270.3	270.4	271.5	273.2	274.7	274.7	274.1	274.2	274.4	274.0	277.0	277.1	276.6
5,0°	273.4	274.3	273.6	272.7	273.3	272.3	273.5	276.6	278.8	280.3	282.6	283.8	283.6
7,5°	268.4	272.0	274.5	275.9	278.4	281.1	280.9	281.1	283.3	281.4	281.4	282.2	283.4
10,0°	276.1	275.9	278.7	283.3	286.3	286.9	286.0	284.7	284.2	281.9	279.6	277.1	277.3
12,5°	281.3	282.2	283.7	288.9	293.9	293.8	293.7	291.9	286.3	284.1	279.7	275.7	274.4
15,0°	281.1	288.0	292.4	295.7	298.6	296.0	289.7	288.1	284.8	282.9	277.7	276.9	276.0
17,5°	281.1	290.6	297.2	298.7	299.8	298.7	288.5	285.6	284.8	283.6	284.4	283.4	282.6
20,0°	280.7	292.1	296.6	300.8	301.1	293.8	288.4	289.1	289.4	289.7	292.3	294.8	294.6
22,5°	288.7	295.6	305.2	306.8	302.6	291.6	294.7	298.4	296.3	302.0	304.4	307.3	310.9
25,0°	293.3	302.1	310.2	308.2	300.0	304.4	300.3	306.0	314.5	315.8	322.6	327.6	328.1
27,5°	295.1	304.0	315.6	308.2	307.2	309.0	311.5	316.2	322.4	331.3	341.0	342.3	347.8
30,0°	296.3	310.5	318.6	311.7	311.7	317.3	321.0	328.4	335.1	348.1	357.8	362.2	361.1
32,5°	300.0	316.4	321.2	320.4	322.3	332.0	333.6	347.0	358.3	367.3	373.3	381.7	372.6
35,0°	300.3	319.7	321.7	325.6	332.6	343.0	357.1	367.9	377.8	390.3	388.6	387.7	369.4
37,5°	310.5	323.4	327.5	330.5	342.7	360.8	372.5	392.7	414.1	412.2	402.6	386.6	372.5
40,0°	306.7	330.8	334.6	342.4	361.1	375.6	400.5	408.6	435.7	427.5	406.4	389.1	370.1
42,5°	306.3	335.9	340.9	358.1	381.7	400.9	421.0	435.6	445.3	435.6	399.0	382.7	355.5
45,0°	303.2	331.0	352.9	377.7	410.2	434.3	445.3	455.7	442.6	423.9	389.8	341.8	303.3
47,5°	301.6	336.5	377.0	408.1	440.1	460.6	469.6	457.4	422.0	387.5	349.8	300.0	258.6
50,0°	299.6	347.6	392.2	442.9	471.5	482.6	470.8	441.6	392.0	354.8	309.2	269.5	243.1
52,5°	298.1	351.8	420.7	473.8	497.3	499.2	462.5	400.7	364.8	333.6	290.9	256.4	233.4
55,0°	296.4	377.3	452.0	498.7	509.7	480.6	422.2	367.6	356.1	327.6	282.3	247.9	219.8
57,5°	304.1	401.5	482.8	520.7	515.0	447.7	376.1	370.2	367.9	327.8	285.1	233.0	181.5
60,0°	313.7	432.1	504.8	536.4	484.2	378.6	362.0	406.0	382.5	328.5	253.1	180.4	127.9
62,5°	323.0	454.5	522.9	531.9	420.3	344.5	406.4	437.2	400.9	298.6	180.8	103.7	72.0
65,0°	344.9	474.6	534.2	478.7	349.3	355.5	461.5	463.3	369.4	197.1	86.0	60.4	50.6
67,5°	384.9	502.1	523.3	416.2	305.9	418.2	501.2	453.1	243.9	95.6	57.8	47.3	41.7
70,0°	400.5	466.7	464.5	324.8	314.9	493.9	484.0	328.4	125.6	60.9	45.2	38.8	34.8
72,5°	358.5	358.7	351.8	254.6	365.9	485.2	394.2	184.1	76.3	45.4	33.5	30.2	27.1
75,0°	248.8	218.0	225.7	220.3	356.9	392.4	267.8	98.5	34.6	31.5	29.4	24.9	21.7
77,5°	130.6	113.0	145.7	175.3	240.1	233.3	127.5	42.6	21.2	23.4	23.0	16.7	15.6
80,0°	34.5	28.3	60.6	84.1	88.8	97.8	40.6	17.8	14.2	16.4	14.0	11.1	11.6
82,5°	7.5	5.6	9.8	16.6	21.5	20.4	10.9	7.9	8.8	8.6	8.9	5.8	7.0
85,0°	1.1	1.2	1.1	1.3	1.4	1.9	2.3	2.1	2.2	2.7	3.5	2.8	2.3
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	277.3	277.3	277.6	276.6	277.0	276.8	270.8	271.1	270.4	270.8	270.2	268.3	267.7
5,0°	281.9	281.9	278.2	280.1	281.1	280.6	273.6	273.0	271.7	271.1	269.1	268.2	265.4
7,5°	283.5	282.9	281.4	281.0	282.1	285.4	268.8	268.8	268.5	268.8	266.7	267.0	264.4
10,0°	279.2	274.9	270.8	268.5	269.2	267.3	274.9	272.6	270.4	268.7	265.5	260.5	259.1
12,5°	272.1	272.1	273.6	269.2	269.2	273.1	277.7	274.5	270.9	266.6	261.3	260.1	257.8
15,0°	276.2	274.6	273.2	280.0	279.6	277.2	274.9	270.0	268.0	265.6	261.1	253.1	248.9
17,5°	285.8	287.0	285.3	286.6	289.2	292.9	272.7	272.3	268.1	263.3	259.7	253.3	247.5
20,0°	299.1	299.4	301.3	300.1	304.9	307.8	276.8	266.0	261.2	262.0	255.9	246.8	236.8
22,5°	313.3	316.0	319.4	316.6	317.2	315.9	280.7	268.4	257.6	254.4	250.0	238.1	227.3
25,0°	332.9	331.7	329.1	327.2	327.4	329.8	278.2	269.4	260.1	257.0	246.4	228.9	216.0
27,5°	347.9	343.4	339.0	334.3	330.1	327.7	279.9	264.3	260.3	256.8	239.8	225.1	209.4
30,0°	360.9	348.0	335.3	330.2	324.7	321.0	279.0	262.4	253.7	250.7	238.4	217.0	198.0
32,5°	362.6	347.1	334.4	330.4	326.1	322.8	284.1	262.1	247.8	248.2	226.8	210.6	193.3
35,0°	356.8	346.6	334.7	336.8	328.1	328.1	280.8	258.0	245.4	238.4	219.8	203.2	186.8
37,5°	357.5	341.5	333.2	324.9	314.7	314.6	279.2	255.9	235.7	231.4	214.7	193.6	178.6
40,0°	343.5	323.7	301.8	292.7	285.0	281.8	278.8	246.9	227.6	225.6	204.9	186.4	162.2
42,5°	311.3	283.7	259.6	245.5	240.5	235.1	275.8	245.2	222.6	215.5	197.8	175.8	147.6
45,0°	263.6	240.0	225.9	210.9	205.5	204.7	269.5	235.2	213.4	208.3	188.9	160.6	131.2
47,5°	233.5	212.2	205.2	196.9	185.3	190.2	264.3	230.8	205.4	199.3	173.8	140.3	115.6
50,0°	214.5	200.5	186.8	176.0	167.7	165.6	259.0	220.9	196.2	188.8	159.4	120.1	101.4
52,5°	202.4	173.0	153.3	144.0	132.9	132.1	254.9	217.3	187.5	179.0	145.3	98.1	84.8
55,0°	178.1	146.2	127.0	120.0	107.8	104.8	250.8	214.4	186.5	170.5	129.2	82.5	73.4
57,5°	142.5	118.4	102.4	94.4	89.3	85.3	251.0	212.9	185.8	169.2	115.7	71.1	65.4
60,0°	95.2	80.8	77.5	71.8	71.2	69.8	251.1	218.4	187.0	167.7	103.8	61.3	59.6
62,5°	58.0	54.8	52.2	54.7	53.3	54.6	253.1	214.1	180.6	159.5	93.9	56.2	53.4
65,0°	44.4	44.5	46.9	43.2	43.6	44.1	259.8	218.3	176.5	135.3	87.7	51.0	49.2
67,5°	38.9	35.1	35.0	34.1	33.4	32.4	277.4	228.7	169.2	111.0	72.7	44.8	40.8
70,0°	31.2	27.0	26.8	26.1	26.1	26.6	284.4	224.8	144.3	80.0	58.1	39.0	36.7
72,5°	24.4	22.5	22.5	20.4	21.1	21.5	265.5	198.7	107.9	53.5	43.1	34.7	32.8
75,0°	18.8	17.1	17.9	17.0	16.6	16.3	204.9	133.2	50.6	34.4	32.4	29.0	26.8
77,5°	14.7	13.5	12.8	12.5	12.8	12.8	119.2	54.2	11.6	23.6	21.2	18.0	18.4
80,0°	10.6	10.1	9.1	8.6	8.6	8.1	33.5	11.1	7.6	13.9	11.9	10.5	10.2
82,5°	7.3	6.2	6.1	5.6	4.9	5.4	5.5	2.7	2.8	3.8	4.3	3.5	2.3
85,0°	3.5	3.6	2.8	2.5	2.0	2.1	1.1	1.0	0.9	0.9	0.8	0.7	0.4
87,5°	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	0.4	0.4
2,5°	266.9	268.1	268.2	268.7	268.5	267.1	267.0	267.7	267.4	266.6	267.0	3.3	3.7
5,0°	263.6	262.9	262.0	260.1	259.5	259.0	256.6	256.8	259.2	257.8	258.3	6.5	10.1
7,5°	260.8	257.0	250.7	249.7	247.6	246.8	246.7	245.8	245.3	247.7	247.1	9.6	19.8
10,0°	252.8	249.3	247.8	246.7	248.4	244.5	243.4	240.2	241.8	240.9	240.4	12.7	32.4
12,5°	253.4	252.4	245.5	238.4	237.7	235.4	233.8	229.5	224.3	224.0	220.7	15.7	48.2
15,0°	244.8	237.8	231.9	225.9	220.6	215.3	208.8	208.3	207.9	205.7	205.7	18.5	66.7
17,5°	234.5	223.9	215.9	208.8	204.9	202.3	197.0	195.4	195.9	193.7	190.2	21.4	88.1
20,0°	225.2	218.0	205.4	199.6	193.3	189.7	186.4	179.5	178.4	175.2	173.3	24.2	112.4
22,5°	216.7	204.6	199.4	191.6	182.0	178.9	173.7	168.4	165.9	162.8	162.3	27.2	139.6
25,0°	204.9	195.2	187.0	178.8	174.1	164.7	158.3	153.2	148.3	147.1	145.5	30.2	169.8
27,5°	196.3	186.4	178.9	166.9	161.7	149.4	143.4	139.0	134.8	135.6	133.7	33.1	202.9
30,0°	190.9	177.5	163.1	156.2	146.5	137.9	134.3	127.6	124.1	121.6	122.6	35.7	238.6
32,5°	181.0	165.6	154.2	144.9	134.1	130.0	128.2	124.1	121.8	116.9	115.9	38.6	277.2
35,0°	167.7	157.4	146.1	134.8	131.4	126.8	124.8	120.5	110.3	104.9	101.4	41.3	318.5
37,5°	156.7	145.7	133.9	129.2	129.2	125.7	115.5	103.4	94.2	86.0	85.0	43.7	362.2
40,0°	146.9	134.3	126.9	126.3	125.9	115.4	98.8	88.6	77.3	72.8	71.3	45.3	407.5
42,5°	136.5	122.6	122.7	123.6	114.3	99.3	84.3	75.2	69.8	69.3	65.6	46.2	453.8
45,0°	120.9	117.7	119.9	119.0	104.2	85.2	72.0	67.4	65.3	64.5	65.6	46.5	500.3
47,5°	109.1	110.0	113.2	107.7	88.8	73.6	66.8	64.8	64.8	63.5	63.4	46.7	547.0
50,0°	97.5	101.6	105.2	92.5	74.5	65.6	61.9	61.6	59.1	61.3	61.0	46.7	593.7
52,5°	89.6	92.9	95.0	80.0	65.9	60.3	58.1	59.1	57.5	56.6	56.1	46.3	640.0
55,0°	78.3	80.4	76.2	65.5	57.9	54.0	55.5	52.2	52.9	52.4	56.0	45.7	685.7
57,5°	69.5	67.7	63.9	52.8	49.8	49.5	49.4	50.2	47.3	48.6	48.1	45.3	730.9
60,0°	61.6	59.4	53.6	47.0	46.1	44.6	45.2	44.1	43.4	43.0	43.3	44.1	775.0
62,5°	55.6	50.3	44.1	41.3	40.6	40.9	40.9	39.6	40.9	39.1	37.9	42.3	817.3
65,0°	46.5	42.0	38.0	35.8	35.8	36.1	35.5	33.9	31.7	32.0	31.7	40.2	857.5
67,5°	39.5	36.1	31.5	29.7	29.9	29.1	27.9	25.5	23.3	22.3	22.6	38.2	895.8
70,0°	34.2	29.3	27.2	25.7	24.5	22.3	19.1	14.7	12.3	10.1	9.4	34.5	930.3
72,5°	27.0	24.4	22.8	20.1	17.7	12.1	9.4	6.3	4.4	4.3	4.3	28.9	959.1
75,0°	21.4	18.1	16.5	13.1	8.9	5.4	3.9	2.7	2.0	1.9	2.4	21.1	980.3
77,5°	15.3	10.9	8.3	5.4	3.5	2.1	1.3	1.0	0.9	1.0	1.4	12.6	992.9
80,0°	7.1	3.9	2.2	1.4	0.8	0.5	0.4	0.4	0.3	0.4	0.4	5.2	998.0
82,5°	1.4	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	1.5	999.6
85,0°	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248C41F08NE EAN: 4058352802694	LP number 59082_153
----------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19390	115.8	127.1	121.4
95	241	252	18398	108.5	118.9	113.7
90	229	250	17482	102.0	111.7	106.8
85	216	248	16489	95.2	104.2	99.7
80	203	246	15497	88.5	97.0	92.8
75	190	243	14504	82.1	89.8	85.9
70	178	241	13588	76.3	83.4	79.8
65	165	238	12596	70.2	76.7	73.4
60	152	235	11603	64.1	70.1	67.1
55	140	232	10687	58.8	64.1	61.4
50	127	229	9695	53.0	57.8	55.4
45	114	225	8703	47.3	51.6	49.4
40	102	221	7787	42.0	45.9	44.0
35	89	216	6794	36.5	39.8	38.2
30	76	210	5802	31.1	33.8	32.4
25	63	203	4809	25.8	28.1	27.0
20	51	195	3893	21.1	22.8	22.0
15	38	184	2901	16.1	17.4	16.8
13	32	178	2443	13.8	14.8	14.3