


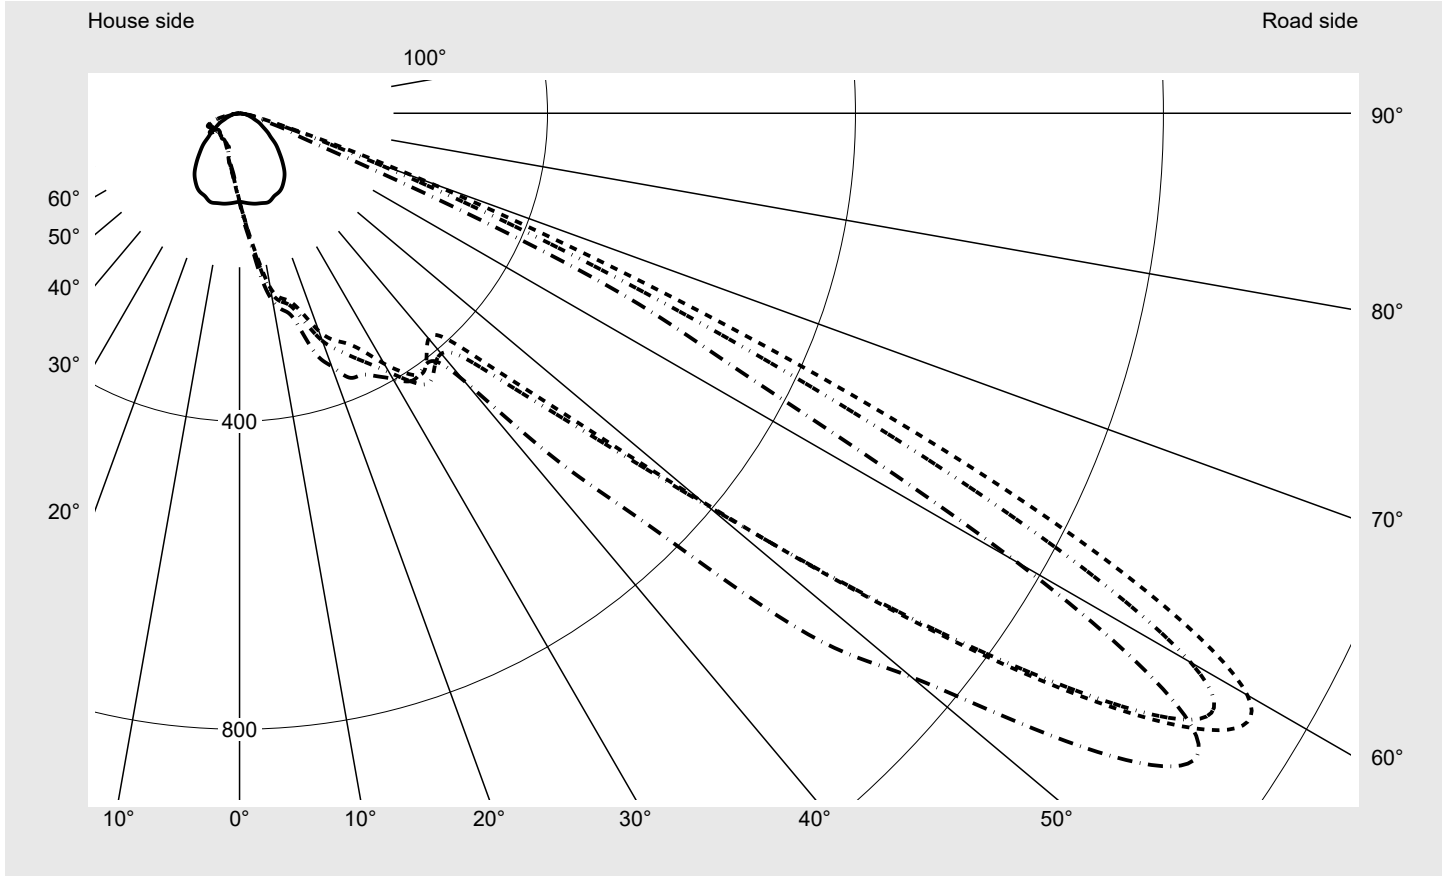
Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
	Version standard bracket Optic asymmetric distribution PL33T Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 91200 lm Power consumption = 663.7 W Luminous efficacy = 137.4 lm/W	serial documentation 21.07.2023





Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1512 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	293.1
Imax 80°	14.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

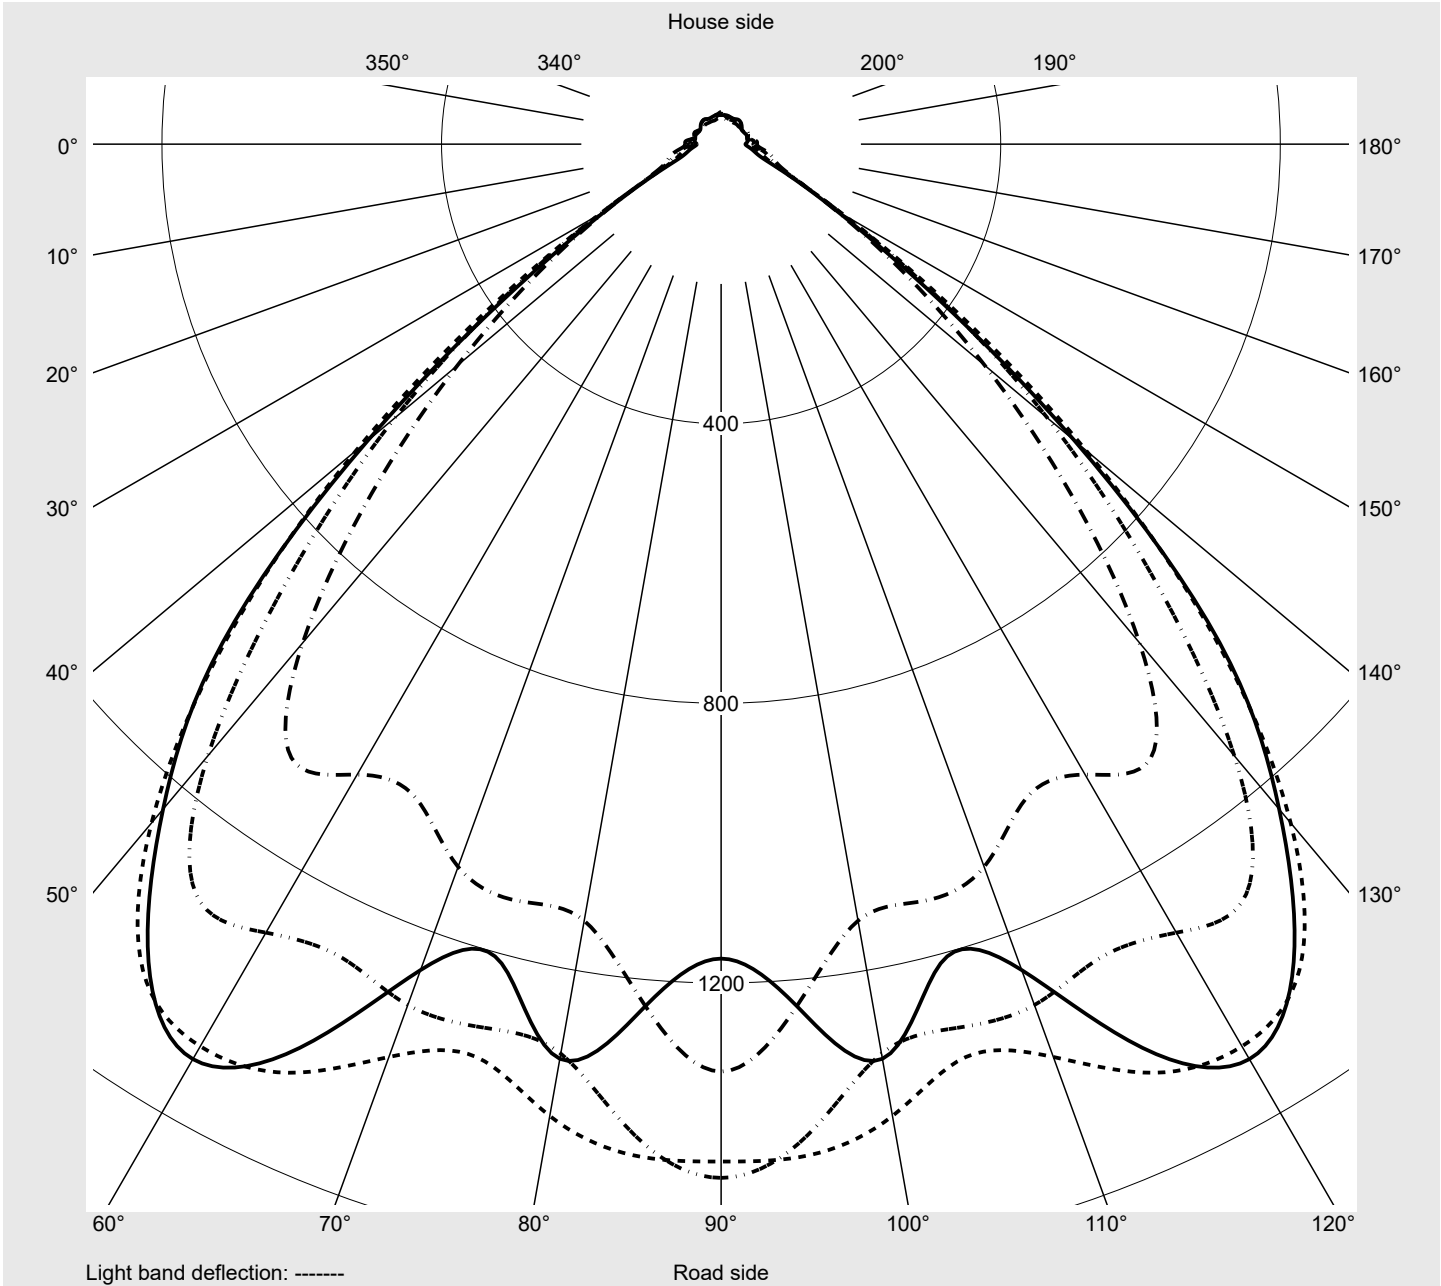

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	115.9	117.8	119.7	121.5	123.4	125.2	127.0	128.8	130.5	131.9	133.2	134.2	135.3
5,0°	117.1	121.3	125.6	129.8	134.2	138.3	142.4	146.4	150.1	153.5	156.8	159.9	162.8
7,5°	118.3	124.1	130.4	136.4	142.6	148.8	155.3	162.1	168.8	175.4	182.2	189.0	195.4
10,0°	119.3	126.8	134.5	142.4	151.3	160.9	171.1	181.6	192.6	203.6	214.1	223.0	230.3
12,5°	119.8	129.0	139.4	150.3	162.7	175.1	187.4	200.1	212.5	223.0	231.9	239.5	245.6
15,0°	120.7	131.9	144.3	157.2	170.3	183.2	196.8	209.8	221.1	230.4	238.2	245.7	253.1
17,5°	121.5	133.8	147.1	160.7	173.9	188.6	203.4	216.6	227.5	236.8	246.9	259.4	272.5
20,0°	119.8	133.6	147.5	161.2	176.3	193.1	210.5	225.9	238.6	250.8	266.8	284.5	300.8
22,5°	116.8	131.1	146.6	161.5	178.5	197.9	218.3	235.9	249.3	265.0	286.2	304.9	318.7
25,0°	115.3	128.1	142.9	160.9	179.9	199.8	221.6	240.6	253.5	271.5	293.5	312.2	329.9
27,5°	113.7	125.3	137.4	158.3	178.2	198.8	220.7	242.0	257.3	277.0	300.8	326.5	348.4
30,0°	110.6	122.0	132.5	153.9	175.5	195.6	219.8	248.1	269.8	294.7	324.9	355.7	375.6
32,5°	106.2	118.6	127.7	149.6	171.9	193.1	222.3	256.7	284.7	313.1	348.5	381.3	399.7
35,0°	101.5	113.9	123.3	144.5	166.4	191.2	224.8	260.7	291.8	321.5	358.8	390.8	413.1
37,5°	95.8	106.4	118.0	137.5	159.7	186.2	223.8	257.5	285.2	314.5	349.5	379.3	399.0
40,0°	88.4	96.3	109.5	127.9	150.5	179.8	220.9	250.8	275.3	305.2	341.3	364.0	382.1
42,5°	81.0	87.2	100.4	118.1	139.5	173.8	220.1	250.3	278.2	318.0	358.6	378.8	396.9
45,0°	73.5	78.9	93.2	111.7	132.2	169.5	220.8	256.6	301.2	362.9	416.9	458.3	472.5
47,5°	66.9	72.2	87.1	103.0	121.1	156.3	209.4	261.0	334.8	427.1	526.9	585.7	591.5
50,0°	59.9	61.5	73.3	85.5	98.0	128.1	188.1	269.9	388.8	533.6	698.5	798.8	784.9
52,5°	51.4	55.5	67.8	77.4	87.6	117.4	189.0	316.2	492.3	707.7	931.2	1071.9	1041.5
55,0°	46.1	50.5	62.6	70.6	82.4	114.7	200.7	369.8	609.3	871.2	1142.3	1309.8	1302.6
57,5°	40.2	43.9	54.3	62.0	75.5	111.5	202.5	390.4	681.2	999.1	1267.7	1442.4	1490.3
60,0°	34.9	38.5	45.2	52.9	69.0	109.8	191.1	356.9	660.3	1008.6	1242.1	1428.2	1511.5
62,5°	30.9	33.3	37.7	44.9	59.8	97.7	158.8	278.0	512.4	813.0	1008.6	1237.1	1295.6
65,0°	26.8	28.7	32.7	39.5	49.3	73.0	115.3	190.6	336.2	538.9	731.9	943.1	924.7
67,5°	21.4	22.4	26.6	32.5	40.3	52.1	74.3	113.3	187.7	307.0	459.4	575.1	534.1
70,0°	18.4	18.3	20.4	27.2	35.3	42.2	54.2	70.0	98.5	151.6	233.9	293.1	253.9
72,5°	15.1	15.5	16.6	21.9	28.1	33.3	38.7	45.1	54.2	70.0	91.0	111.2	98.9
75,0°	12.7	13.1	13.5	16.2	20.2	22.7	25.8	26.8	30.7	34.4	39.7	46.0	41.9
77,5°	10.1	10.8	11.0	12.3	14.2	15.1	15.9	16.2	17.8	19.7	22.3	24.9	23.6
80,0°	8.4	8.0	8.3	9.8	9.4	9.6	9.4	9.8	10.8	11.4	13.1	13.8	13.3
82,5°	7.0	5.9	5.3	6.3	6.1	5.6	5.1	5.5	5.8	6.2	7.1	7.3	6.9
85,0°	3.7	3.0	2.5	2.5	2.4	2.3	2.4	2.4	2.4	2.7	3.0	3.1	3.0
87,5°	0.8	0.7	0.7	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	136.2	136.9	137.5	138.0	138.4	142.8	114.0	112.3	110.6	109.1	107.4	106.0	104.6
5,0°	165.4	167.6	169.5	171.1	172.2	171.0	113.1	109.5	106.2	103.1	100.1	97.4	95.0
7,5°	201.0	205.3	208.7	211.4	213.4	215.0	112.7	107.4	102.5	98.0	94.0	90.4	87.2
10,0°	236.0	240.3	243.5	245.8	247.5	247.6	112.1	105.5	99.3	93.5	88.3	84.2	80.7
12,5°	250.6	254.2	257.0	259.0	260.5	262.0	111.2	103.1	95.7	89.2	83.4	79.0	75.2
15,0°	259.9	265.8	271.3	275.8	279.2	278.8	110.3	100.9	92.7	84.9	78.0	72.5	68.3
17,5°	285.5	297.2	307.1	314.2	319.2	326.4	109.2	97.1	87.1	79.6	73.0	67.5	63.4
20,0°	314.7	325.4	334.0	341.6	348.0	349.8	105.4	93.1	83.4	75.1	68.0	63.2	59.8
22,5°	332.6	346.4	355.5	362.2	367.7	371.6	103.2	90.0	78.9	70.2	63.8	59.2	54.4
25,0°	349.6	366.6	373.1	374.0	374.3	375.0	100.0	85.6	75.1	66.7	60.4	54.2	50.4
27,5°	367.3	384.2	392.0	390.8	385.7	384.9	95.1	80.6	71.4	63.5	56.4	50.9	48.3
30,0°	388.4	402.0	408.5	405.1	400.6	398.3	90.6	76.8	67.6	60.3	52.7	49.0	46.5
32,5°	412.6	421.2	419.2	410.7	409.5	412.7	86.7	73.1	63.8	55.8	50.5	47.5	45.2
35,0°	428.1	430.1	422.3	413.7	409.5	410.4	81.8	68.6	59.9	52.5	48.9	46.0	43.9
37,5°	416.0	425.5	416.3	408.9	404.6	406.4	77.3	64.4	54.5	49.5	47.0	44.4	41.9
40,0°	407.7	426.0	429.6	432.6	448.4	453.6	72.2	59.3	50.5	47.0	44.7	43.3	41.0
42,5°	430.0	468.1	493.4	521.0	564.8	614.1	67.5	54.0	47.4	44.9	43.5	41.8	40.0
45,0°	506.8	568.7	617.4	667.9	736.7	770.1	63.9	50.2	44.9	43.1	41.9	40.2	39.1
47,5°	619.7	699.6	761.5	806.6	904.7	1001.9	59.8	47.0	42.7	41.3	40.7	39.2	38.1
50,0°	792.7	875.4	920.3	947.6	1059.0	1139.0	55.3	44.0	39.8	39.7	39.2	37.8	36.6
52,5°	1032.6	1100.3	1120.9	1128.1	1238.5	1326.8	50.6	42.4	38.7	38.9	38.1	36.6	35.8
55,0°	1284.2	1310.6	1308.7	1321.2	1422.9	1478.9	47.3	42.0	40.0	41.0	41.2	38.2	37.2
57,5°	1465.8	1389.8	1352.1	1411.8	1451.9	1455.5	42.5	40.2	39.8	40.9	39.4	38.4	36.9
60,0°	1426.5	1257.4	1213.4	1328.7	1237.4	1165.2	37.7	37.8	38.2	38.5	37.2	36.4	36.3
62,5°	1124.2	952.3	945.6	1015.6	907.5	758.4	32.6	35.1	36.2	35.5	35.2	35.0	35.6
65,0°	735.3	603.2	614.9	613.5	555.9	513.8	29.2	32.1	33.4	32.9	32.3	33.3	35.5
67,5°	404.6	331.1	313.7	259.8	206.8	151.5	25.9	27.8	29.6	28.7	30.2	31.6	34.3
70,0°	183.2	158.3	140.3	92.9	73.1	71.8	20.7	21.8	22.6	24.0	27.9	28.8	31.4
72,5°	77.7	68.3	56.4	42.9	38.2	35.3	16.4	17.8	19.1	20.5	24.8	25.7	26.6
75,0°	37.3	34.1	29.2	25.1	22.7	23.4	13.2	14.6	15.6	17.3	20.5	21.5	21.5
77,5°	21.7	20.1	17.6	15.8	14.7	13.9	10.4	11.6	12.6	13.5	15.4	17.0	16.4
80,0°	11.9	11.2	10.4	9.9	9.5	9.7	8.1	8.6	9.0	9.9	10.8	12.4	12.4
82,5°	6.1	5.9	5.8	5.6	5.6	5.4	6.2	6.7	6.8	7.0	7.8	8.3	8.9
85,0°	2.9	2.9	2.9	2.8	2.8	2.9	3.3	3.0	3.5	3.3	3.2	3.5	3.7
87,5°	1.3	1.3	1.3	1.4	1.4	1.4	0.7	0.8	0.9	1.0	1.0	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	0.2	0.2
2,5°	103.3	102.1	100.9	99.9	99.0	98.3	97.7	97.3	97.0	96.7	96.6	1.4	1.6
5,0°	92.7	90.7	88.9	87.4	86.1	85.0	84.1	83.3	82.8	82.3	82.2	2.9	4.5
7,5°	84.5	82.1	80.1	78.4	76.9	75.8	74.9	74.3	73.9	73.6	73.5	4.7	9.1
10,0°	77.7	75.3	73.2	71.4	69.9	68.8	68.0	67.5	67.3	67.1	67.1	6.6	15.7
12,5°	72.0	69.2	67.0	65.2	63.9	63.0	62.6	62.4	62.2	61.9	61.7	8.5	24.2
15,0°	65.1	62.2	59.6	57.8	56.6	55.2	53.8	53.0	52.6	52.5	52.5	10.2	34.5
17,5°	60.4	57.7	54.7	51.7	50.6	50.0	49.1	48.2	46.8	46.1	45.9	12.3	46.8
20,0°	56.1	51.9	49.8	48.9	48.2	47.1	46.5	45.5	45.1	44.9	44.9	14.6	61.4
22,5°	50.6	48.6	47.4	46.3	45.4	44.5	43.6	43.1	43.1	43.1	43.1	16.8	78.2
25,0°	48.3	46.7	44.9	43.9	43.0	41.8	41.3	41.2	41.3	41.5	41.9	18.7	96.9
27,5°	46.3	44.4	42.8	41.9	40.1	39.8	39.8	39.8	40.1	40.8	40.9	20.7	117.7
30,0°	44.9	42.5	41.4	39.6	39.0	38.7	38.7	38.8	39.1	39.6	39.8	23.0	140.7
32,5°	42.8	41.6	40.5	38.7	38.0	38.0	38.1	38.4	38.9	39.3	39.7	25.3	166.0
35,0°	41.7	40.8	39.1	38.2	38.0	38.0	37.9	38.3	39.2	39.9	39.9	27.2	193.2
37,5°	41.2	40.4	38.9	38.2	38.2	38.1	38.2	38.3	38.4	38.7	38.9	28.2	221.3
40,0°	40.5	39.4	38.4	38.1	38.0	37.7	37.7	37.7	38.0	38.4	38.6	29.5	250.8
42,5°	39.5	38.5	37.4	37.2	37.0	37.0	37.1	37.1	37.4	38.4	37.8	33.0	283.9
45,0°	38.8	37.7	36.5	36.3	36.0	36.1	36.3	36.4	36.8	37.3	37.7	39.5	323.4
47,5°	36.8	36.2	36.2	35.5	35.2	35.2	35.5	35.7	36.4	36.1	40.5	47.9	371.2
50,0°	35.8	34.8	35.3	35.7	34.9	34.8	35.1	34.9	35.9	37.0	35.8	58.3	429.6
52,5°	36.1	35.5	35.9	35.8	35.4	35.3	35.3	35.2	36.5	37.5	37.4	73.4	503.0
55,0°	36.8	37.5	38.4	39.5	38.7	37.7	37.4	37.9	39.8	42.1	43.7	89.3	592.2
57,5°	37.8	40.4	41.8	42.8	41.3	40.1	40.2	41.0	42.5	43.9	46.0	98.7	691.0
60,0°	38.3	40.9	42.4	42.7	41.4	40.4	40.7	41.5	42.0	41.7	41.5	95.6	786.5
62,5°	38.5	41.4	43.6	42.8	41.5	41.1	42.1	42.4	40.9	39.6	39.1	78.4	865.0
65,0°	38.9	42.2	43.9	43.2	42.3	43.1	44.6	43.3	41.2	39.1	40.2	55.8	920.7
67,5°	38.1	41.4	42.4	42.4	43.0	44.6	44.7	43.1	40.9	40.6	40.3	33.0	953.7
70,0°	34.7	37.9	36.2	38.0	40.2	42.8	43.5	41.9	40.7	40.0	39.1	18.6	972.3
72,5°	27.3	28.5	30.5	33.0	36.3	38.1	39.3	37.1	35.0	34.4	30.3	10.5	982.8
75,0°	21.5	22.7	25.0	27.9	31.1	33.0	31.5	27.7	25.5	23.7	22.1	6.7	989.5
77,5°	16.4	15.9	18.5	19.9	24.2	24.4	23.3	21.2	17.3	13.8	12.4	4.5	994.0
80,0°	10.3	10.5	12.0	12.9	13.4	14.2	14.2	12.8	10.8	10.9	10.0	2.9	996.9
82,5°	7.6	7.7	8.7	9.1	8.6	9.6	9.3	8.4	7.7	8.0	8.0	1.9	998.8
85,0°	3.8	3.9	4.2	4.1	3.7	3.8	3.5	3.3	3.2	3.6	3.9	0.9	999.7
87,5°	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.8	1.9	1.9	2.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	91200	663.7
95	238	252	86668	620.8
90	222	249	81989	577.9
85	207	247	77393	537.9
80	193	244	73030	501.2
75	179	241	68563	464.4
70	165	238	63982	428.0
65	151	235	59276	391.2
60	138	232	54838	357.8
55	125	228	50185	324.3
50	112	224	45442	290.8
45	100	220	40972	260.2
40	88	215	36483	229.1
35	76	210	31866	198.6
30	65	204	27502	171.1
25	53	197	22684	141.3
20	42	188	18186	113.9
15	31	177	13694	87.0
10	20	161	9002	60.0
5	10	136	4709	35.7
2	3	91	1669	17.6

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	88410	658.7
95	237	251	83886	613.2
90	221	249	79507	570.6
85	206	246	75140	530.9
80	191	244	70707	491.9
75	177	241	66396	455.3
70	163	238	61981	418.8
65	149	234	57531	382.4
60	136	231	53155	349.4
55	123	227	48605	316.0
50	111	224	44340	285.5
45	98	219	39611	252.5
40	86	214	35193	221.6
35	75	209	31075	194.1
30	63	203	26350	164.3
25	52	196	22015	137.2
20	41	187	17594	110.2
15	30	176	13132	83.6
10	20	161	8917	59.3
5	9	132	4249	32.9
2	3	91	1656	17.3

Photometric test report

Family Floodlight FL11	Order number: 5XA779116F01BA EAN: 4058352822784	LP number 59254_56
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	91200.0	663.7
25.0	88410.0	658.7