


Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
	Version standard bracket Optic asymmetric distribution PL61 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 162520 lm Power consumption = 1334.7 W Luminous efficacy = 121.8 lm/W	serial documentation 13.09.2023





Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 924 cd/klm**

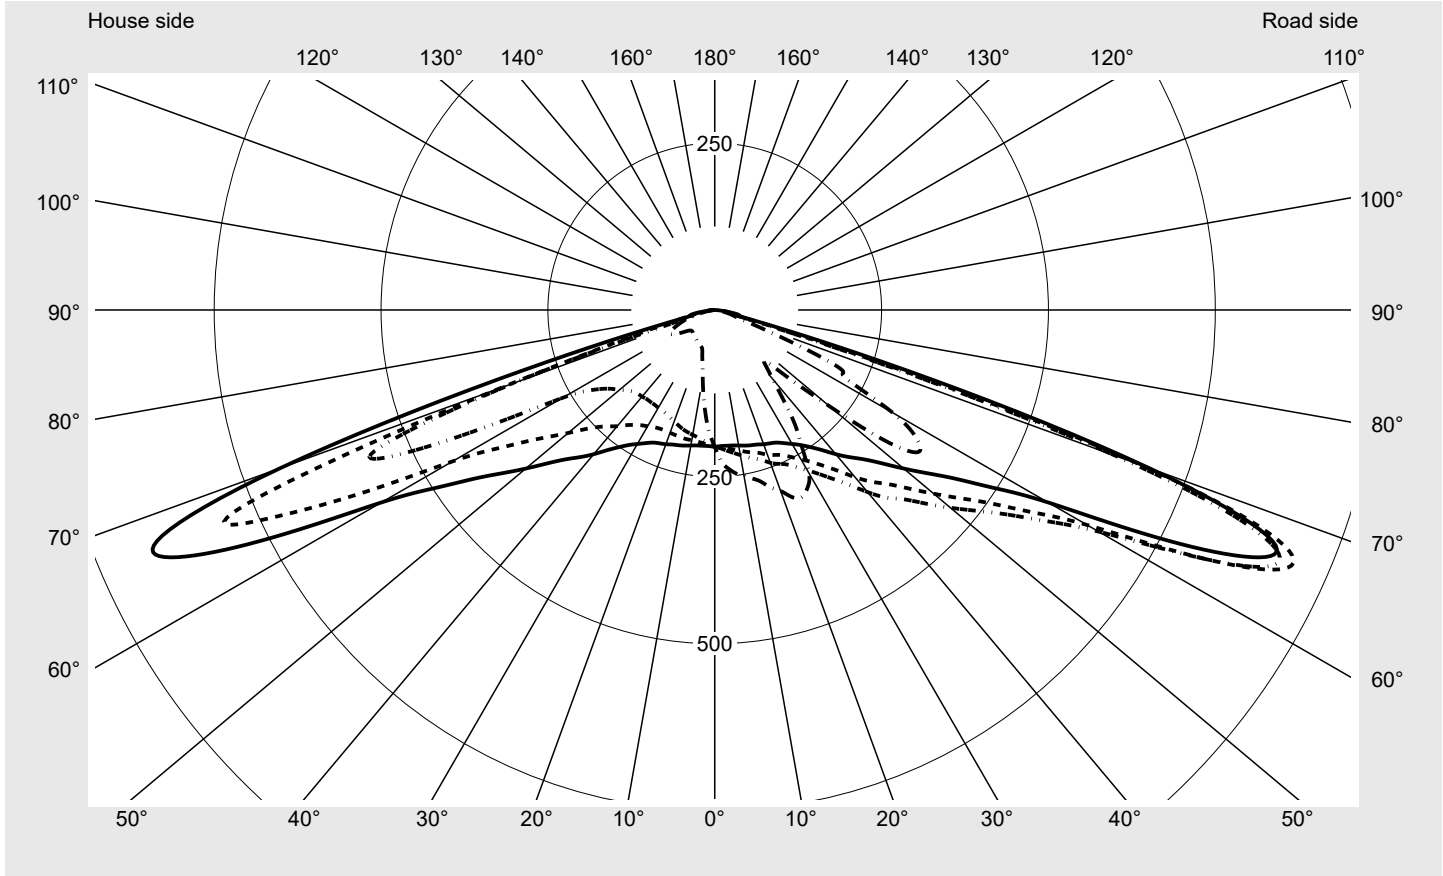

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	692.3
Imax 80°	30.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

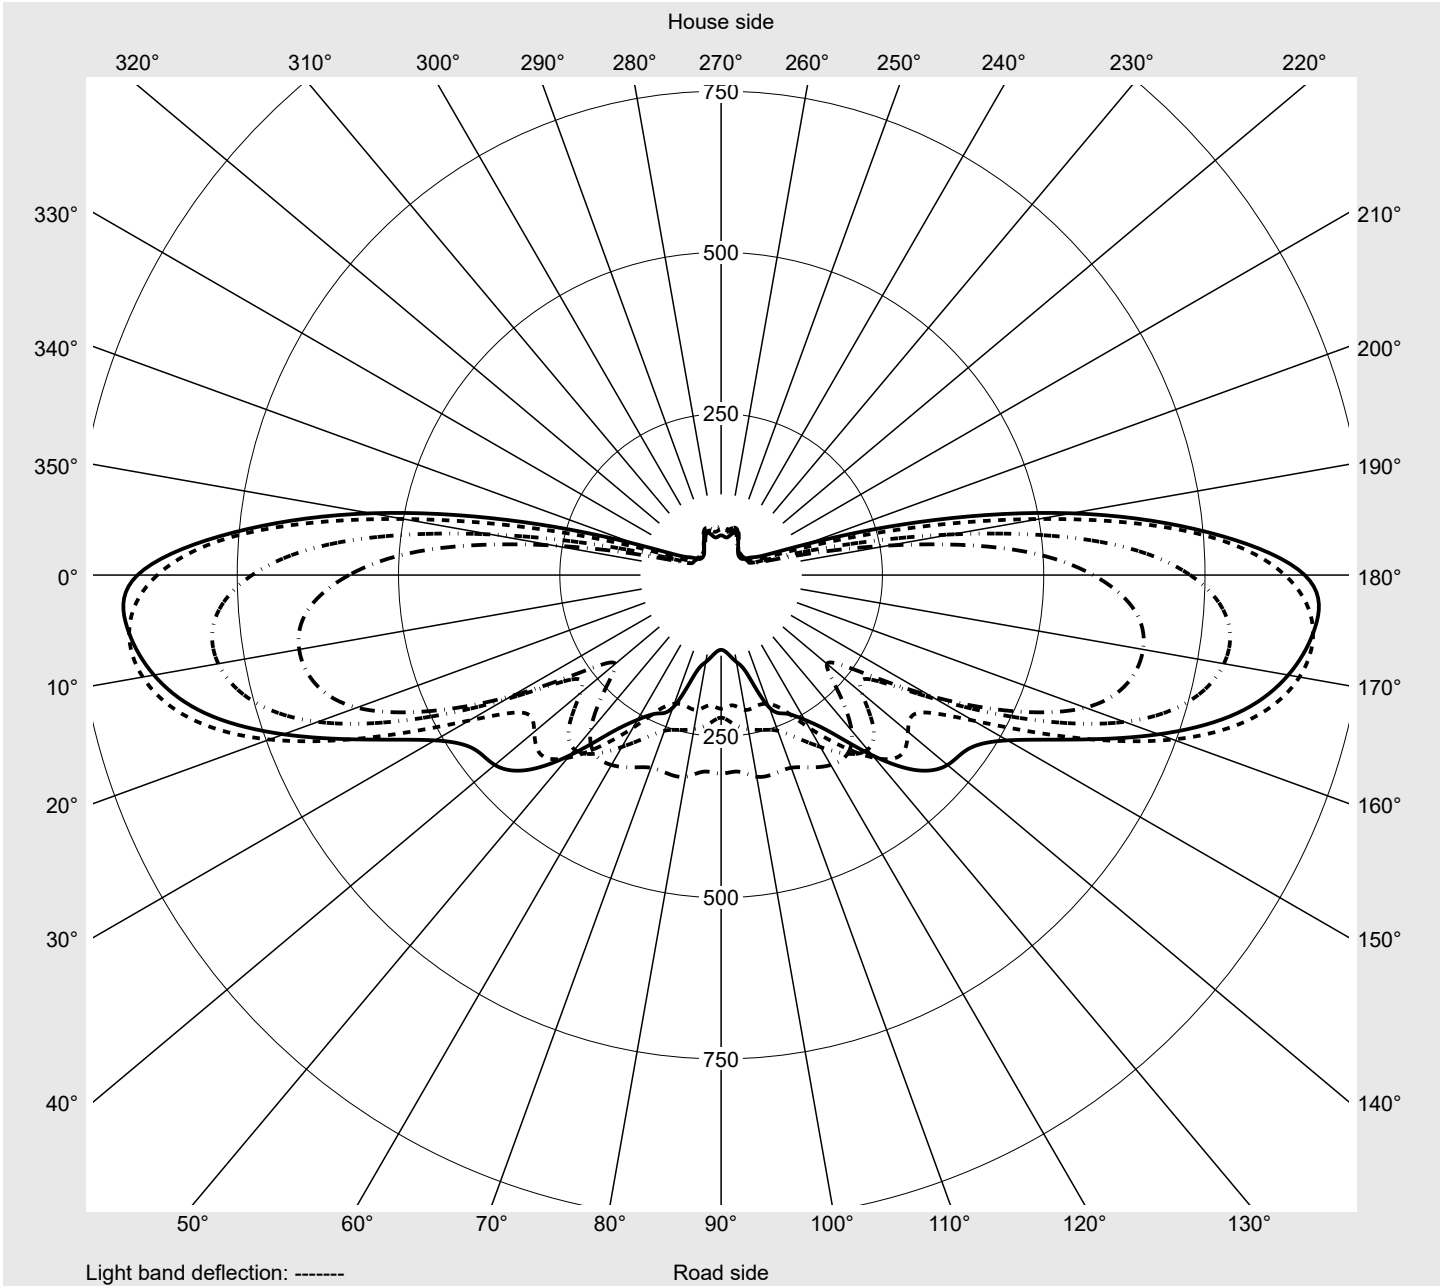

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	204.1	205.9	207.6	209.4	211.0	212.6	214.0	215.5	216.8	218.0	219.2	220.1	221.1
5,0°	204.3	208.1	211.7	215.1	218.3	221.3	224.0	226.5	228.6	230.5	232.2	233.5	234.7
7,5°	204.7	210.6	216.0	220.8	225.0	228.8	232.0	234.9	237.1	239.0	240.7	242.0	243.1
10,0°	206.2	213.9	220.8	226.7	231.6	235.7	239.0	241.6	243.4	245.1	246.3	247.5	248.5
12,5°	208.1	217.6	225.8	232.8	238.2	242.2	245.2	247.4	249.0	250.5	251.6	252.7	253.8
15,0°	209.8	221.1	230.6	238.4	244.1	248.1	251.0	253.2	254.7	256.3	257.5	258.9	260.4
17,5°	211.4	224.8	235.6	244.3	250.3	254.1	257.1	259.4	261.3	263.4	265.0	266.9	268.9
20,0°	214.1	230.8	243.7	252.6	257.5	260.6	263.4	265.7	268.2	270.9	273.6	276.5	279.0
22,5°	216.2	235.1	249.5	259.0	263.9	267.5	270.6	273.8	276.7	280.5	284.6	288.8	292.0
25,0°	219.3	240.0	255.4	265.5	271.3	275.6	279.2	282.8	286.7	291.7	297.1	302.3	305.5
27,5°	224.9	248.4	265.4	276.0	282.4	286.8	290.4	294.3	299.5	305.6	311.0	314.3	315.2
30,0°	231.8	258.3	277.3	288.5	295.5	300.5	304.4	308.1	312.6	317.6	320.2	319.2	314.6
32,5°	240.0	270.2	291.6	303.6	311.4	317.0	321.3	325.1	327.0	326.0	322.4	315.3	304.8
35,0°	251.0	285.3	309.0	322.8	331.8	337.8	341.8	343.9	340.7	330.8	318.4	305.6	290.0
37,5°	264.8	303.9	330.0	345.6	355.4	362.0	364.9	361.5	349.7	331.0	310.0	292.0	270.3
40,0°	282.0	327.0	356.1	372.8	383.3	389.8	391.1	379.8	355.4	325.3	296.0	267.5	238.5
42,5°	299.1	349.3	381.5	400.1	410.6	416.3	412.2	389.5	350.3	306.4	265.4	228.3	197.1
45,0°	316.6	369.4	401.3	419.1	428.3	430.6	416.6	381.3	333.5	281.9	233.9	194.2	165.1
47,5°	340.2	396.4	429.6	445.6	453.0	449.8	423.6	375.7	317.5	257.6	204.8	168.1	148.1
50,0°	369.6	428.3	461.1	474.4	477.4	463.0	422.5	363.0	295.4	230.2	181.3	159.0	162.0
52,5°	401.9	463.3	494.2	504.2	500.7	470.9	414.9	342.7	265.8	202.0	174.5	186.1	216.1
55,0°	441.1	505.3	534.1	538.4	524.1	476.3	403.0	316.4	233.2	186.7	198.5	241.5	284.7
57,5°	496.4	564.0	588.7	584.0	554.2	482.5	388.1	284.4	206.9	201.3	252.0	305.4	339.5
60,0°	576.7	644.3	664.1	651.1	600.9	499.1	374.5	259.3	214.2	257.9	314.6	339.9	339.9
62,5°	727.1	787.6	791.4	752.3	665.5	530.0	385.4	281.8	285.1	333.6	353.2	337.8	307.7
65,0°	873.9	920.6	910.3	854.1	745.2	594.1	451.0	372.6	378.1	394.2	369.9	322.8	273.7
67,5°	904.6	924.4	892.6	827.7	721.6	603.3	512.4	469.0	457.9	427.6	364.8	298.4	259.0
70,0°	692.3	683.4	640.8	616.3	574.3	530.6	499.4	482.0	461.6	395.0	327.5	275.1	237.3
72,5°	304.0	238.3	203.0	260.5	362.4	384.3	380.7	369.4	325.3	266.7	227.4	180.7	147.1
75,0°	64.8	47.4	44.1	55.4	144.8	194.0	196.1	169.5	92.1	70.4	94.1	71.8	61.3
77,5°	36.5	33.7	33.3	31.6	45.4	59.9	56.3	31.9	26.4	27.1	33.5	31.7	28.1
80,0°	30.4	27.3	26.5	25.1	23.1	23.0	20.7	17.5	16.7	16.2	16.3	19.2	19.4
82,5°	16.5	15.6	16.7	16.1	13.7	12.7	11.6	10.0	9.6	9.3	8.7	9.1	10.2
85,0°	6.6	6.6	7.3	7.3	6.4	5.7	5.0	4.6	4.2	3.8	3.5	3.2	3.1
87,5°	2.2	2.3	2.2	2.2	2.0	1.8	1.6	1.4	1.3	1.1	1.1	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	222.0	222.8	223.4	224.0	224.3	227.3	202.3	200.6	198.8	197.0	195.2	193.6	192.1
5,0°	235.9	236.9	237.7	238.2	238.6	238.9	200.4	196.6	192.6	188.6	184.7	181.0	177.5
7,5°	244.1	244.8	245.4	245.9	246.3	247.2	198.9	192.9	186.6	180.5	174.3	168.5	162.8
10,0°	249.5	250.1	250.7	251.1	251.6	252.1	198.3	190.0	181.6	173.1	164.7	156.5	148.6
12,5°	254.9	255.9	256.5	257.0	257.6	258.5	198.0	187.5	176.9	166.2	155.4	144.9	134.5
15,0°	261.9	263.3	264.4	265.2	266.0	266.2	197.5	184.7	171.8	159.0	146.2	133.6	121.7
17,5°	271.0	273.0	274.7	275.9	276.8	278.8	196.5	181.1	165.7	150.7	135.6	121.7	109.2
20,0°	281.5	283.8	286.0	287.6	288.8	288.5	195.8	177.8	159.7	141.9	125.1	110.6	98.7
22,5°	294.3	296.3	298.4	300.3	301.5	303.6	195.4	174.3	153.3	132.9	114.7	100.2	87.9
25,0°	306.5	306.1	306.6	307.9	308.7	309.1	196.0	171.7	147.3	124.8	105.3	89.2	76.0
27,5°	312.0	306.2	303.2	303.4	303.1	300.7	197.9	169.9	141.7	116.5	94.3	76.2	68.3
30,0°	305.5	293.7	287.1	285.4	282.4	282.6	201.2	169.1	137.0	108.7	81.8	68.5	65.3
32,5°	289.9	273.0	262.8	257.1	249.5	243.0	204.8	168.2	131.9	98.7	72.2	65.3	63.6
35,0°	268.4	245.7	231.9	220.0	208.5	209.7	210.4	168.0	126.5	87.6	66.8	63.4	62.1
37,5°	242.5	214.8	198.3	180.4	168.5	167.6	217.5	168.0	118.2	76.7	63.6	61.4	60.4
40,0°	206.1	177.7	162.1	141.9	133.3	135.1	227.3	169.5	107.3	68.2	60.9	59.3	58.5
42,5°	170.8	149.5	133.4	119.3	114.5	113.1	236.5	170.2	97.2	63.0	58.3	57.1	56.4
45,0°	145.3	128.7	118.9	111.2	108.8	108.8	248.1	172.9	92.0	60.1	56.3	55.1	54.2
47,5°	142.0	138.1	139.0	141.9	143.6	153.7	264.5	178.3	89.3	58.1	54.7	53.4	52.4
50,0°	178.8	195.0	206.9	220.9	226.9	224.5	286.8	186.2	88.9	56.5	53.1	51.7	50.8
52,5°	247.7	273.0	293.1	311.6	317.7	321.5	311.7	194.2	88.9	55.1	51.5	50.2	49.2
55,0°	320.9	344.4	359.9	372.8	371.0	371.4	343.0	206.1	91.2	54.2	50.0	48.7	47.8
57,5°	355.1	358.8	363.7	367.9	359.6	358.6	386.1	224.8	96.0	53.6	48.6	47.1	46.5
60,0°	328.9	317.8	318.6	317.3	305.8	307.7	453.8	263.3	108.8	54.4	47.4	46.0	45.4
62,5°	278.5	256.8	248.5	242.4	232.3	221.1	590.3	362.7	154.6	61.6	47.4	45.6	44.5
65,0°	231.6	212.4	210.3	212.2	202.7	207.2	740.4	500.4	255.9	94.5	53.9	47.0	43.6
67,5°	236.9	218.5	160.4	136.8	122.6	115.9	758.3	551.2	317.3	138.6	70.9	54.8	43.8
70,0°	212.7	183.9	65.2	48.9	46.2	50.5	337.4	322.6	227.0	124.9	74.3	60.0	45.2
72,5°	128.8	109.5	39.2	34.3	33.8	31.2	126.8	73.2	68.7	66.6	49.6	46.1	37.0
75,0°	60.8	58.1	29.6	25.8	25.1	24.1	57.8	34.5	34.5	35.0	31.4	29.8	27.8
77,5°	27.9	27.5	20.6	18.4	17.7	15.6	32.8	27.6	25.4	24.2	22.8	21.4	20.4
80,0°	15.8	14.4	12.7	11.6	10.7	10.4	27.2	20.6	17.6	16.6	16.8	14.6	13.9
82,5°	8.2	7.7	6.9	6.4	5.9	5.7	15.1	12.9	10.8	10.2	12.6	8.6	8.3
85,0°	2.8	2.6	2.5	2.4	2.4	2.5	6.7	5.9	5.4	4.9	5.2	4.3	4.0
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	2.2	2.1	2.1	2.0	1.9	1.7	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	0.3	0.3
2,5°	190.7	189.5	188.2	187.3	186.4	185.7	185.3	184.9	184.7	184.2	184.4	2.4	2.7
5,0°	174.2	171.1	168.2	165.7	163.5	161.5	160.0	158.7	158.0	157.2	157.1	4.8	7.5
7,5°	157.4	152.4	147.7	143.5	139.8	136.6	134.0	132.1	130.6	129.5	129.2	7.0	14.6
10,0°	141.0	133.8	127.2	121.6	116.8	112.7	109.5	107.0	105.2	104.0	103.6	9.1	23.6
12,5°	124.9	116.3	108.4	101.9	96.7	92.6	89.5	87.2	85.7	84.7	84.4	11.1	34.7
15,0°	111.0	101.7	94.1	87.9	83.1	79.5	76.8	74.9	73.4	72.5	72.2	13.1	47.8
17,5°	98.8	89.9	81.4	74.6	69.9	66.9	65.0	63.8	62.9	62.3	62.1	15.1	62.9
20,0°	88.4	77.5	70.9	67.1	64.5	62.6	61.2	60.2	59.5	59.0	58.8	17.3	80.2
22,5°	76.3	69.9	66.6	64.8	63.1	61.6	60.2	59.1	58.3	57.7	57.4	19.6	99.8
25,0°	69.3	66.4	65.2	64.1	62.8	61.4	60.0	58.7	57.7	56.9	56.6	22.0	121.8
27,5°	65.8	64.8	64.3	63.8	62.9	61.7	60.1	58.5	57.1	56.0	55.5	24.3	146.0
30,0°	64.3	63.9	63.8	63.7	63.1	61.8	59.7	57.6	55.7	54.4	53.7	26.3	172.3
32,5°	63.0	63.0	63.3	63.3	62.5	60.8	58.6	56.5	54.5	52.9	52.1	28.1	200.4
35,0°	61.7	61.9	62.1	61.9	61.1	59.8	58.0	56.0	54.2	52.6	51.7	29.6	230.1
37,5°	60.1	60.2	60.2	60.2	59.8	58.9	57.1	55.0	53.0	51.3	50.3	31.0	261.1
40,0°	58.2	58.0	58.2	58.3	58.3	57.1	55.3	53.4	51.5	49.8	48.8	32.2	293.3
42,5°	55.8	55.8	56.0	56.3	55.9	54.8	53.5	52.1	50.5	48.8	47.7	33.2	326.5
45,0°	53.7	53.6	53.8	53.6	53.2	52.8	52.1	51.0	49.6	47.8	46.7	34.0	360.6
47,5°	51.9	51.7	51.5	51.0	51.2	51.2	50.9	50.5	49.3	47.6	46.6	36.3	396.9
50,0°	50.2	49.9	49.1	49.1	49.6	49.9	50.6	50.8	50.1	48.8	47.9	40.4	437.3
52,5°	48.7	48.0	47.6	47.7	48.4	49.9	51.9	53.2	52.9	52.1	51.7	45.7	483.0
55,0°	47.1	46.4	46.5	46.8	48.1	51.1	55.5	58.0	57.9	58.0	58.3	51.3	534.3
57,5°	45.5	45.2	45.8	46.5	48.8	54.1	61.2	64.5	63.9	64.7	65.9	55.9	590.2
60,0°	44.1	44.2	44.9	46.4	50.2	58.1	68.0	71.4	69.3	70.6	72.8	60.0	650.3
62,5°	43.1	43.1	44.1	46.7	52.3	62.6	73.9	76.1	72.0	73.2	75.8	66.5	716.7
65,0°	42.0	41.8	43.2	46.8	53.8	64.8	75.3	75.0	68.6	68.4	70.7	75.8	792.5
67,5°	40.0	39.9	41.4	45.6	52.8	62.1	68.9	66.5	59.7	59.6	61.6	78.1	870.6
70,0°	37.0	36.6	38.1	41.7	48.1	56.1	61.3	58.0	51.5	50.7	52.3	62.2	932.8
72,5°	31.9	31.2	32.8	36.8	42.3	48.1	50.6	46.7	40.8	39.7	41.0	35.6	968.4
75,0°	25.9	25.7	27.4	30.7	34.5	36.9	36.2	32.6	28.4	27.5	28.4	15.4	983.8
77,5°	19.9	19.9	20.7	22.3	24.1	25.7	25.4	22.7	20.1	19.4	20.0	7.4	991.2
80,0°	13.4	13.2	13.7	14.6	14.9	15.2	14.8	13.1	11.7	11.3	11.4	4.7	995.9
82,5°	7.9	7.6	7.7	7.6	7.7	7.7	7.1	6.1	5.5	5.4	5.4	2.6	998.5
85,0°	3.6	3.4	3.1	2.9	2.6	2.4	2.2	2.2	2.1	2.1	2.0	1.1	999.6
87,5°	1.5	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.1	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	162520	1334.7
95	234	251	154579	1226.1
90	216	248	146321	1128.3
85	200	245	138070	1042.2
80	184	242	130047	955.4
75	169	239	121837	874.9
70	156	236	113711	805.6
65	142	233	105441	731.9
60	129	229	97303	663.8
55	118	226	89358	607.1
50	104	221	81399	533.5
45	93	217	73272	476.9
40	81	212	64744	415.7
35	70	207	56693	358.8
30	60	201	49023	308.2
25	48	193	40254	247.7
20	39	185	32805	203.1
15	28	173	24094	149.1
10	19	159	16361	104.7
5	9	132	8179	56.3
1	2	77	2208	20.5

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
90	214	248	140460	1109.6
90	212	248	139695	1098.9
85	196	245	131970	1012.8
80	180	242	123975	926.7
75	165	238	116266	846.8
70	151	235	108471	772.9
65	138	232	100637	704.8
60	126	228	93207	642.9
55	114	225	85174	579.8
50	101	220	77890	512.9
45	90	216	69864	457.1
40	79	211	62213	401.3
35	68	206	54392	345.0
30	58	200	46672	294.9
25	47	192	38742	240.2
20	37	184	30910	191.2
15	27	172	23041	142.4
10	18	157	15693	98.5
5	9	132	8105	55.6
1	2	77	2190	20.2

Photometric test report

Family Floodlight FL11	Order number: 5XA779125C01AA EAN: 4058352639030	LP number 59236_37
----------------------------------	--	------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	162520.0	1334.7
25.0	140980.0	1116.9